


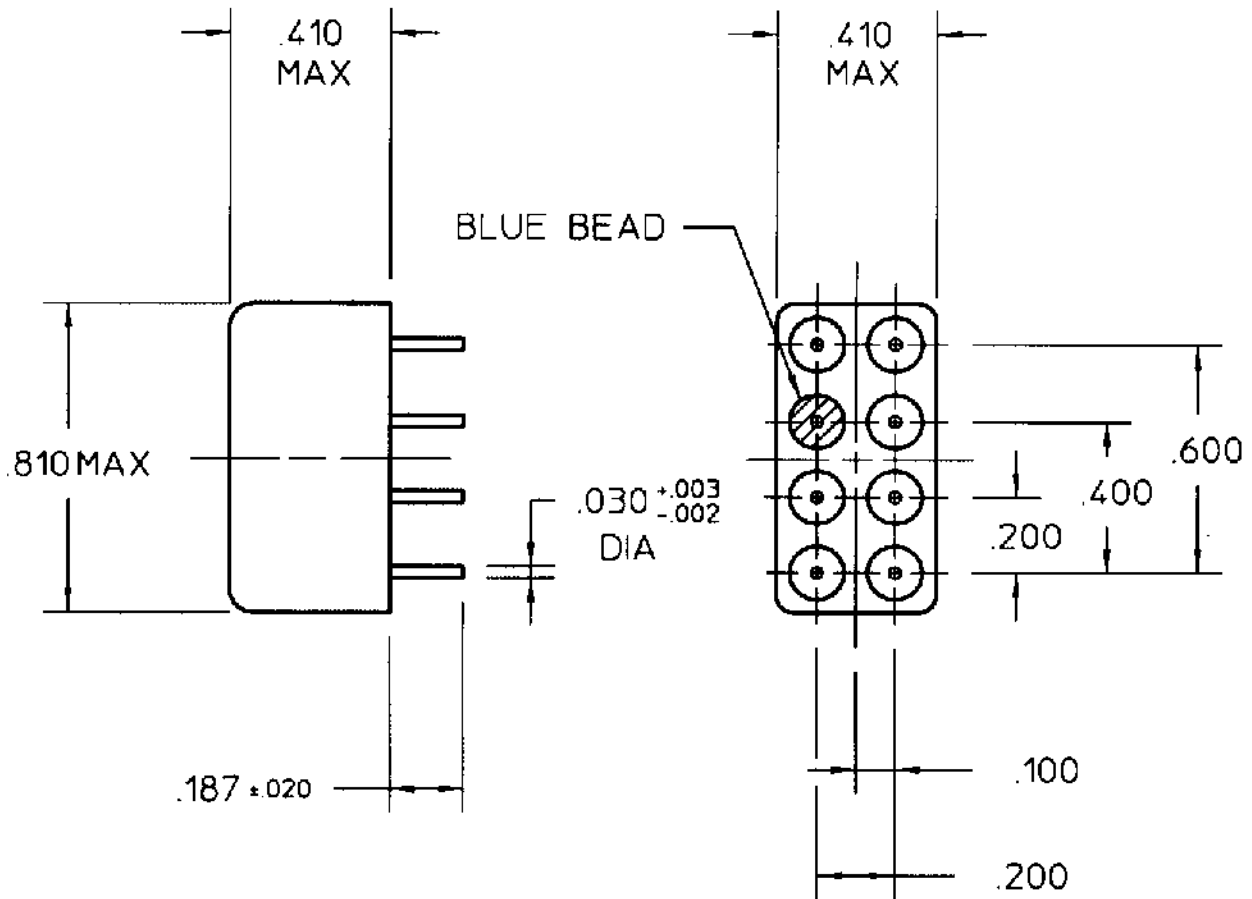


COIL: @ +25 °C
 RESISTANCE 160 OHMS ± 10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 6.4 VDC
 MUST RELEASE 4.0 VDC MAX, 0.7 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

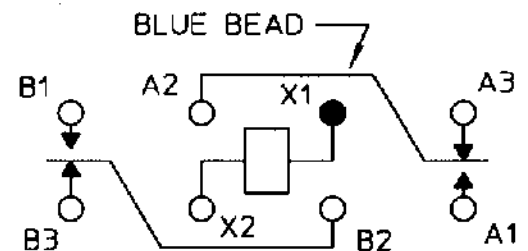

CONTACT RATING: LOW LEVEL TO 2A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/15/96 CK 01/5/00 JPB

**COMMUNICATIONS
 INSTRUMENTS, INC.**

CUST. QPL
 CUST. NO. M39016/6-116L

TYPE "HFW" RELAY

HFW1201G01