
NPN Expitaxial Silicon Transistor

KSD1691




1. Emitter 2. Collector 3. Base

TO-126-3LD
CASE 340AS

Features

- Low Collector-Emitter Saturation Voltage & Large Collector
- Current
- High Power Dissipation: P_C = 1.3 W (T_A = 25 °C)
- Complementary to KSB1151

MARKING DIAGRAM



&3 = Numeric Date Code (Year & Week)
D1691 = Specific Device Code
G = h_{FE} Grade

ORDERING INFORMATION

See detailed ordering and shipping information on page 4 of this data sheet.
NOTE: Some of the device on this data sheet have been **DISCONTINUED**. Please refer to the table on page 4

ABSOLUTE MAXIMUM RATINGS (T_C = 25 °C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	60	V
V_{CEO}	Collector-Emitter Voltage	60	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current (DC)	5	A
I_{CP}	*Collector Current (Pulse)	8	A
I_B	Base Current (DC)	1	A
P_C	Collector Dissipation (T_A = 25 °C)	1.3	W
	Collector Dissipation (T_C = 25 °C)	20	
T_J	Junction Temperature	150	°C
T_{stg}	Storage Temperature	−55 ~ 150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.
* PW ≤ 10 ms, Duty Cycle ≤ 50%.

ELECTRICAL CHARACTERISTICS (T_C = 25 °C unless otherwise noted)

Symbol	Parameter	Test Condition	Value			Unit
			Min	Typ	Max	
I_{CBO}	Collector Cut-off Current	V_{CB} = 50 V, I_E = 0	–	–	−1	μA
I_{EBO}	Emitter Cut-off Current	V_{EB} = 7 V, I_C = 0	–	–	−1	μA
h_{FE1}	*DC Current Gain	V_{CE} = 1 V, I_C = 0.1 A	60	–	–	–
h_{FE2}		V_{CE} = 1 V, I_C = 2 A	100	–	400	
h_{FE3}		V_{CE} = 1 V, I_C = 5 A	50	–	–	
V_{CE}(sat)	*Collector−Emitter Saturation Voltage	I_C = 2 A, I_B = 0.2 A	–	0.1	0.3	V
V_{BE}(sat)	*Base-Emitter Saturation Voltage	I_C = 2 A, I_B = 0.2 A	–	0.9	1.2	V
t_{ON}	Turn ON Time	V_{CC} = 10 V, I_C = 2 A	–	0.2	1	μs
T_{stg}	Storage Time	I_{B1} = −I_{B2} = 0.2 A	–	1.1	2.5	μs
t_F	Fall Time	R_L = 5 kΩ	–	0.2	1	μs

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.
* Pulse Test: PW ≤ 50 μs, Duty Cycle ≤ 2% Pulsed.

© Semiconductor Components Industries, LLC, 2000

Downloaded from Arrow.com.

h_{FE} CLASSIFICATION

Classification	O	Y	G
h_{FE2}	100 ~ 200	160 ~ 320	200 ~ 400

Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS

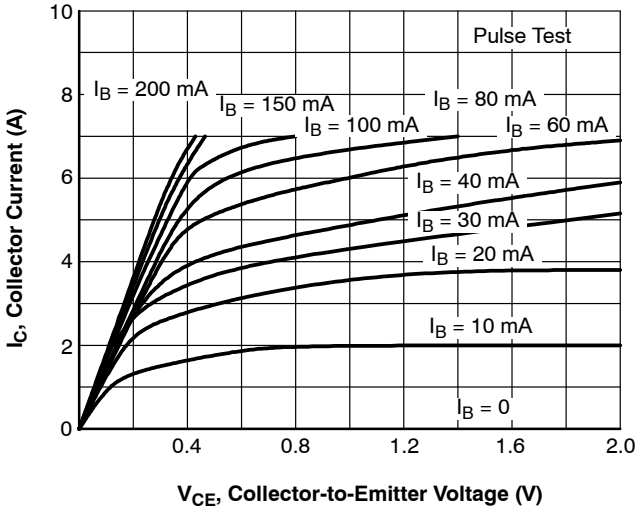


Figure 1. Static Characteristic

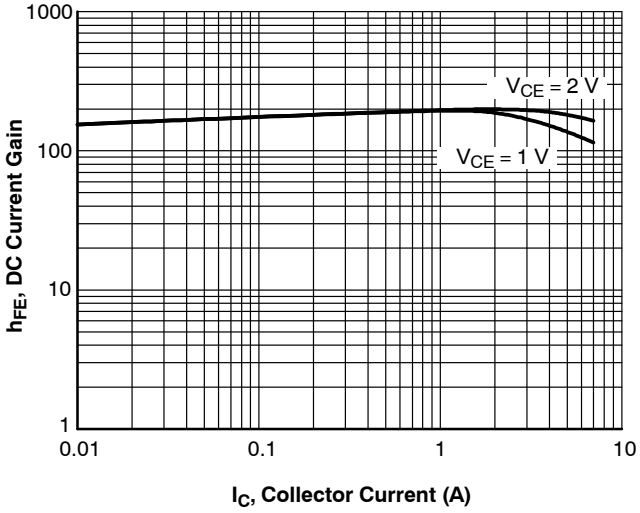


Figure 2. DC Current Gain

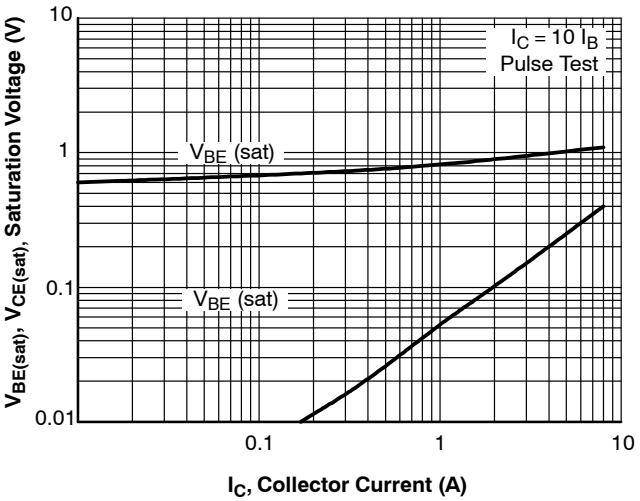


Figure 3. Collector-Emitter Saturation Voltage Base-Emitter Saturation Voltage

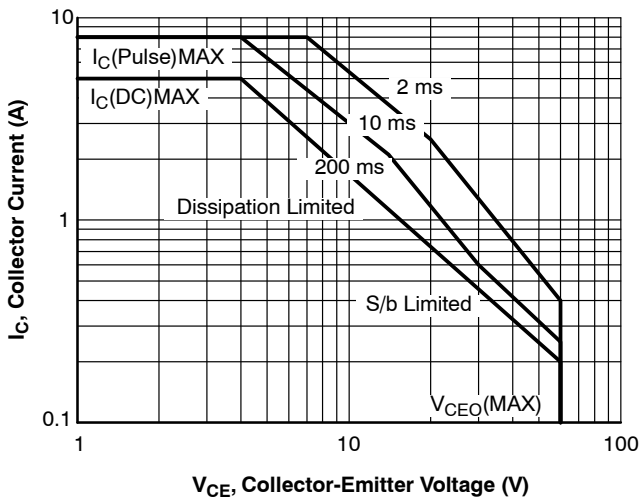


Figure 4. Forward Bias Safe Operating Area

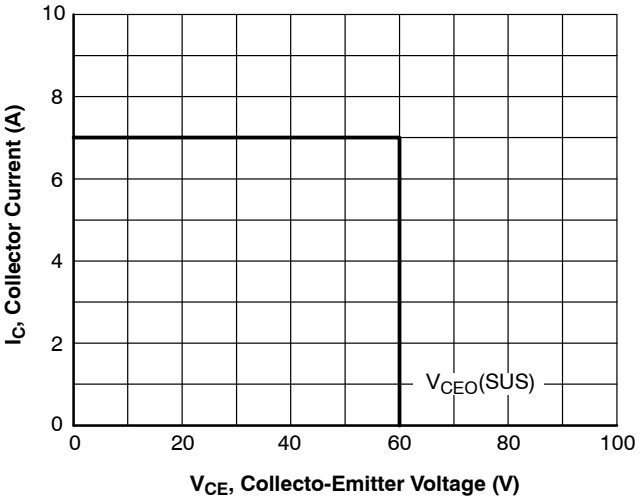


Figure 5. Reverse Bias Safe Operating Area

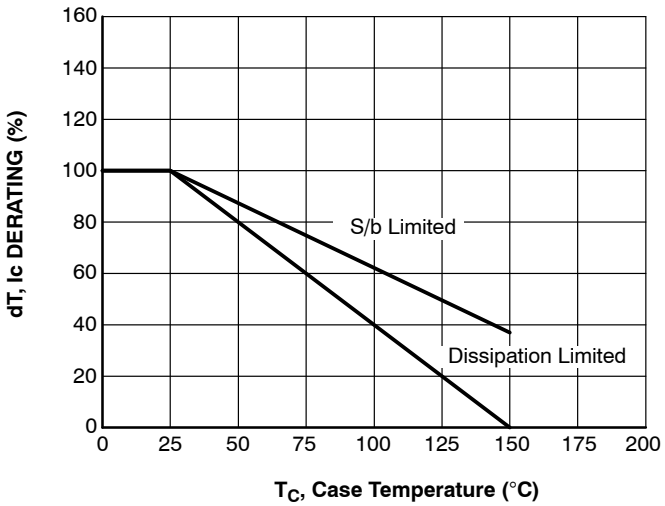


Figure 6. Derating Curve of Safe Operating Areas

Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.

TYPICAL CHARACTERISTICS (CONTINUED)

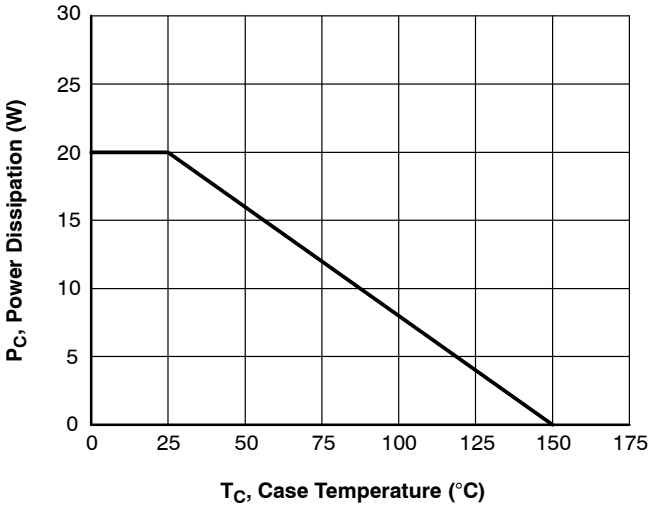


Figure 7. Power Derating

ORDERING INFORMATION

Device	Package	Shipping†
KSD1691YSTU	TO-126-3LD (Pb−Free)	1920 Units / Tube
KSD1691YS	TO-126-3LD (Pb−Free)	2000 Units / Tube

DISCONTINUED (Note 7)

Device	Package	Shipping†
KSD1691GSTU	TO-126-3LD (Pb-Free)	1920 Units / Tube
KSD1691GS	TO-126-3LD (Pb-Free)	2000 BLKBG

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

1. **DISCONTINUED:** These devices are not available. Please contact your **onsemi** representative for information. The most current information on these devices may be available on www.onsemi.com.

Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.

REVISION HISTORY

Revision	Description of Changes	Date
1	KSD1691GSTU, KSD1691GS OPN Marked as Discontinued + Rebranded the Data Sheet to **onsemi** format	1/21/2026


This document has undergone updates prior to the inclusion of this revision history table. The changes tracked here only reflect updates made on the noted approval dates.


Share Feedback
Your Opinion Matters

Downloaded from Arrow.com.

TO−126−3LD
CASE 340AS
ISSUE O

DATE 30 SEP 2016

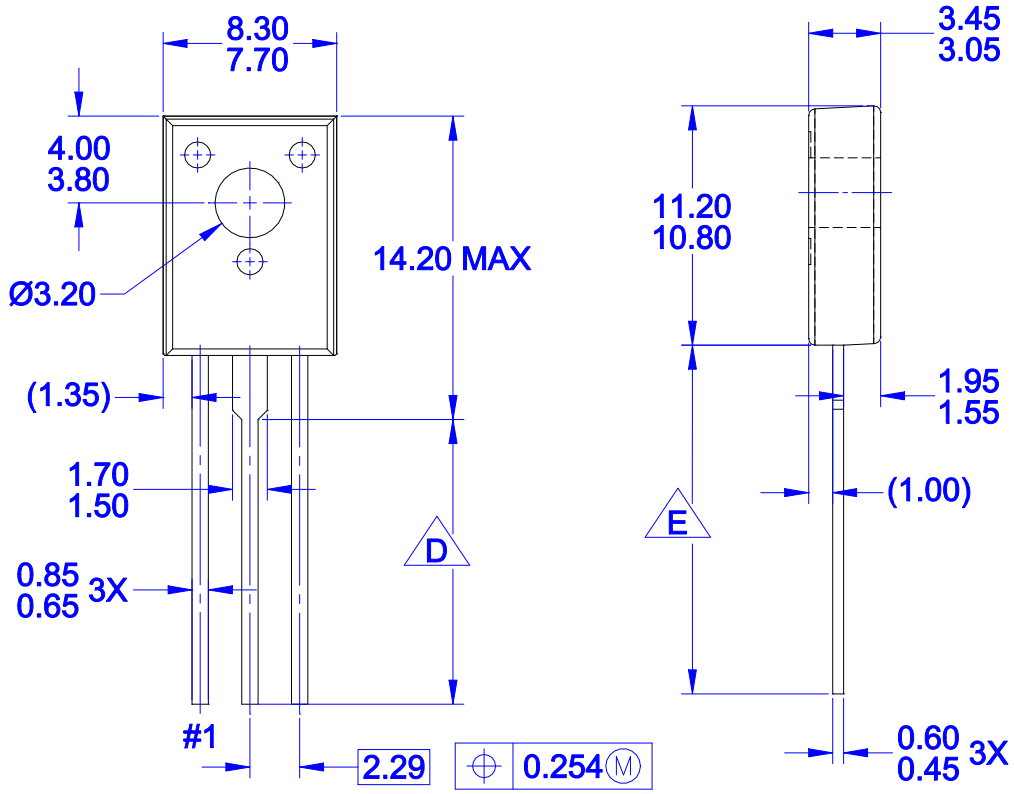



PRODUCTION CODE	TERMINAL LENGTH "D"	TERMINAL LENGTH "E"
TSSTU	3.45 - 4.05	6.45 - 7.45
TSTU	2.36 - 2.96	5.36 - 6.36
NONE (STD LENGTH)	12.76 - 13.36	15.76 - 16.76

NOTES:

A. NO INDUSTRY STANDARD APPLIES TO THIS PACKAGE
B. ALL DIMENSIONS ARE IN MILLIMETERS
C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR PROTRUSIONS

△D FOR TERMINAL LENGTH "D", REFER TO TABLE

△E FOR TERMINAL LENGTH "E", REFER TO TABLE

DOCUMENT NUMBER:	**98AON13817G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**TO−126−3LD**		**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

Downloaded from Arrow.com.

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

◊

Downloaded from Arrow.com.