


OMR-C-112H,V000 Product Details

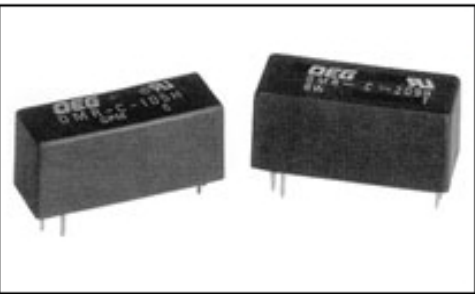

OMR-C-112H,V000
(OMR-C-112H)
TE Part Number: 2-1440000-6
✔ [Active](#)
[Add to Part List](#)

Communications/Signal PC Board Relays

✔ [Converted to EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- OMR Series
- DC Actuating System
- Input Voltage = 12 VDC
- Contact Arrangement = 1 Form A, SPST-NO, 1 N/O
- Contact Current Rating = .5 Amps.

[View all Features](#) | [Find Similar Products](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
 - ▶ [Search for Tooling](#)
 - ▶ [Product Feature Selector](#)
 - ▶ [Contact Us About This Product](#)
 - ▶ [Request Samples](#)
- NEW!

Documentation & Additional Information

Product Drawings:

- [OMR-C-H CUSTOMER DRAWING](#) (PDF, Japanese)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Schematic](#)
- [Wiring Diagram](#)
- [PCB Layout \(Bottom Surface\)](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Termination Type = Through Hole

Electrical Characteristics:

- Actuating System = DC
- Input Voltage (VDC) = 12
- Contact Current Rating (Amps.) = 0.5
- [Coil Resistance \(\$\Omega\$ \)](#) = 1050
- Coil Power, Nominal (mW) = 100 – 280

Body Related Features:

- [Series](#) = OMR

Contact Related Features:

- Mounting Options = PC Board
- [Enclosure](#) = Dust Cover
- [FCC Part 68 Isolation](#) = No
- Approved Standards = UL Recognized

Configuration Related Features:

- [Contact Arrangement](#) = 1 Form A, SPST-NO, 1 N/O
- [Coil Magnetic System](#) = Monostable
- Coil Suppression Diode = Without

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260° C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Converted to comply with RoHS directive

Other:

- Brand = OEG