SHEET 1 OF 1

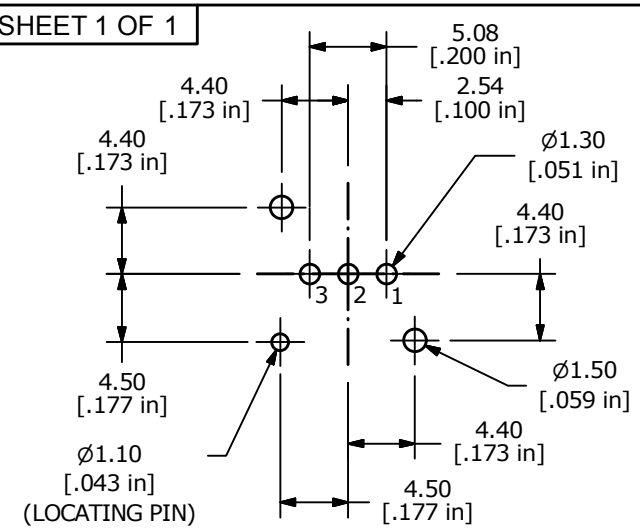

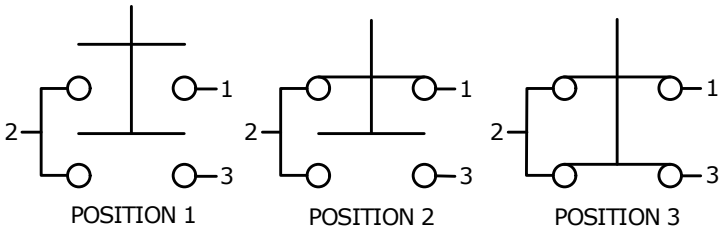

▲ SCHEMATIC
DUAL ACTION

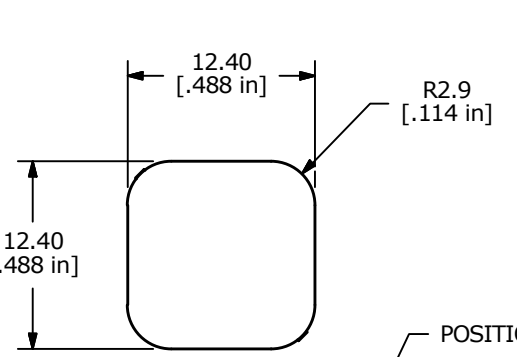



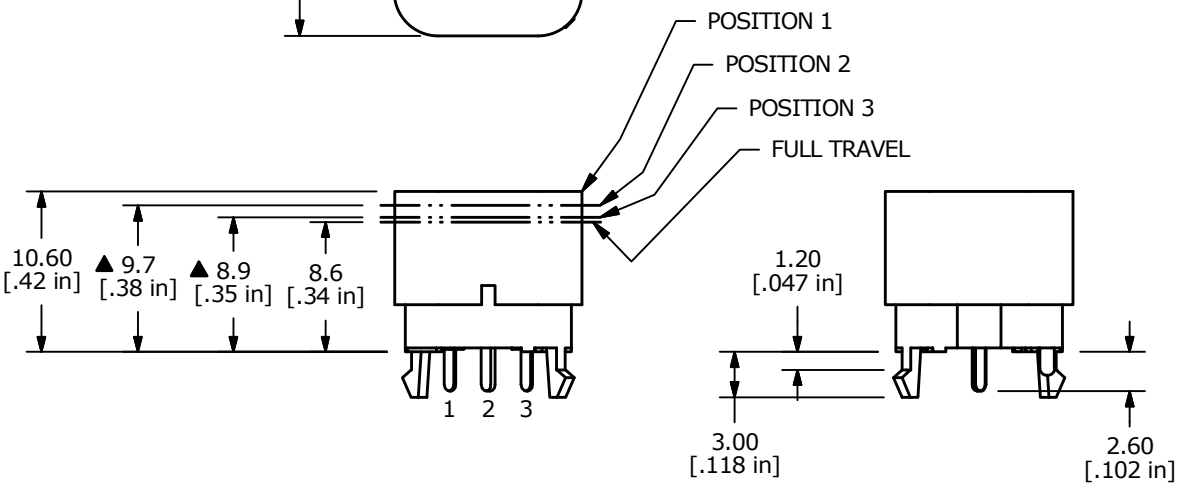

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. RATING: 30mA @ 28VDC
▲ 5. OPERATING FORCE:
   POSITION 2 OPERATING POINT: 600 ± 100gf
   POSITION 3 OPERATING POINT: 1150 ± 150gf
   FULL TRAVEL: 8.6mm
6. ELECTRICAL LIFE: 20,000 CYCLES
7. ▲ DENOTES CRITICAL PARAMETER
8. CONTACT MATERIAL: SILVER
9. 2002/95/EC (RoHS) COMPLIANT

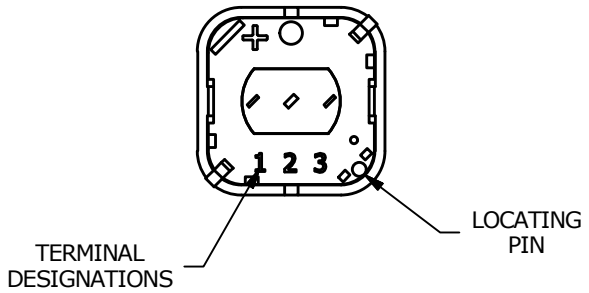

REV	PCR NO	DESCRIPTION	DATE	BY
C	22430	update Note 4	8/9/16	MW
B	22331	update schmatic and switch positions	5/26/16	MW
A	22255	New Release	4/4/16	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

TITLE PB300DTQ

SCALE	DATE	DR	DWG	REV
2:1	3/22/2016	rc	T003001	C

Downloaded from Arrow.com.