


APPROVED: _____

DATE: _____ TITLE: _____




Rev	AWO #	Description	Date	Appr
-		RELEASED	10/19/17	
A		UPDATE DRAWING	1/16/19	AY/RT

03P

02P

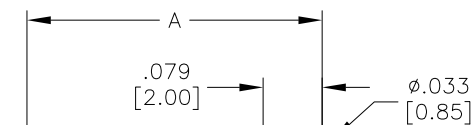

RECOMMENDED PCB LAYOUT

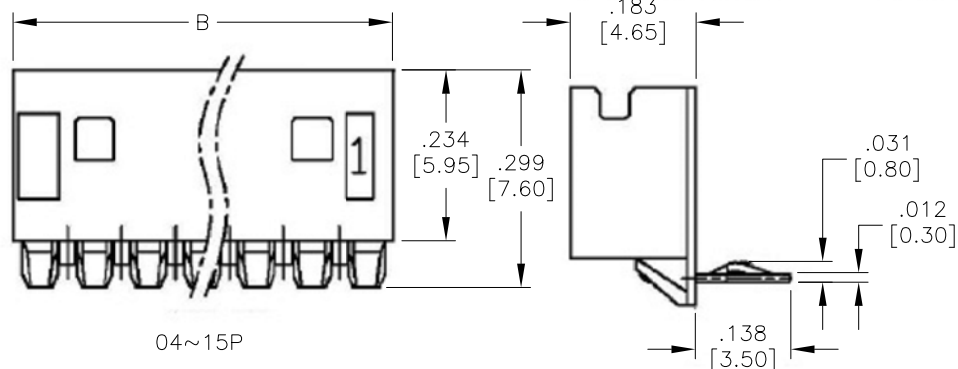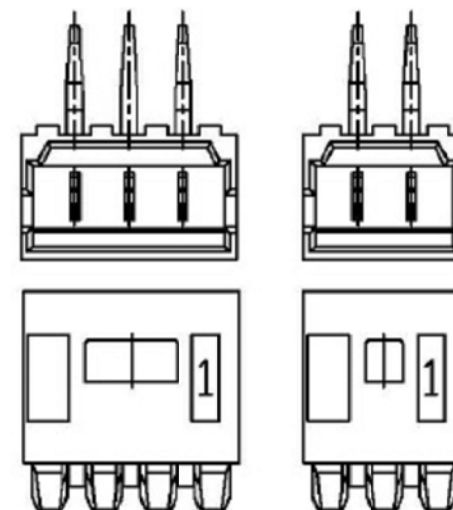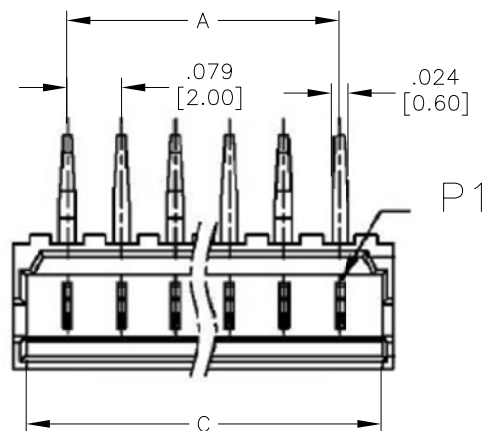

04~15P

Positions: 02 thru 15

A = .079 [2.00] x No. of Spaces

B = .079 [2.00] x No. of Spaces + .157 [4.00]

C = .079 [2.00] x No. of Spaces + .122 [3.10]

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Voltage rating: 125 V AC/DC.

Current rating: 2A AC/DC.

Contact resistance: 20 mohms max.

Insulation resistance: 1000 Mohms min.

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN	AY	10/19/17
CHECKED	YC	10/19/17
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE .079 [2.00] WAFER, PCB TYPE, RIGHT ANGLE
TIN PLATED

SIZE X	PART NO. 2SH-F2-XX-TR	REV. A
REF: S00123T	SCALE: NTS	SHEET 1 OF 1