


SD2420

Silicon Photodiode

FEATURES

- Miniature, hermetically sealed, pill style, metal can package
- 48° (nominal) acceptance angle
- Wide operating temperature range (- 55°C to +125°C)
- Ideal for direct mounting to printed circuit boards
- Mechanically and spectrally matched to SE2460 and SE2470 infrared emitting diodes

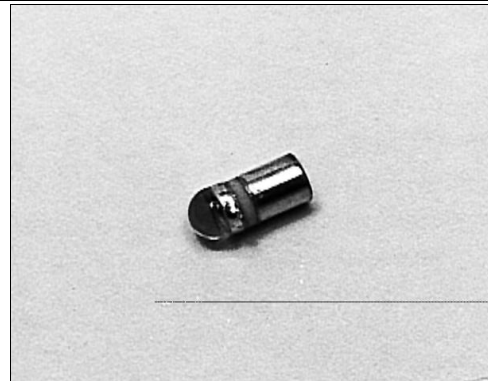


INFRA-1.TIF

DESCRIPTION

The SD2420 is a PN silicon photodiode mounted in a hermetically sealed, glass lensed, metal can package. This package directly mounts in double sided PC boards.

OUTLINE DIMENSIONS in inches (mm)

Tolerance	3 plc decimals	$\pm 0.005(0.12)$
	2 plc decimals	$\pm 0.020(0.51)$

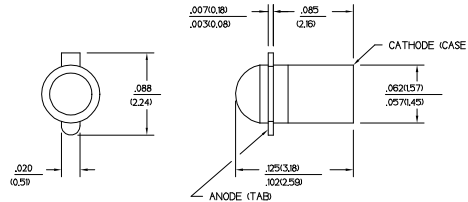

DIM_014.cdr

SD2420


Silicon Photodiode

ELECTRICAL CHARACTERISTICS (25°C unless otherwise noted)						
PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Light Current SD2420-002	I _L	7.0			μA	V _R =20 V H=20 mW/cm ² (1)
Dark Current	I _D			5.0	nA	V _R =20 V H=0
Reverse Breakdown Voltage	V _{BR}	50			V	I _R =10 μA
Angular Response (2)	Ø		48		degr.	I _F =Constant
Rise And Fall Time	t _r , t _f		50		ns	V _R =20 V R _L =50 Ω

Notes
1. The radiation source is a tungsten lamp operating at a color temperature of 2870°K.
2. Angular response is defined as the total included angle between the half sensitivity points.

ABSOLUTE MAXIMUM RATINGS	
(25°C Free-Air Temperature unless otherwise noted)	
Cathode Anode Voltage	50 V
Power Dissipation	125 mW (1)
Operating Temperature Range	-55°C to 125°C
Storage Temperature Range	-65°C to 150°C
Soldering Temperature (10 sec)	260°C

Notes
1. Derate linearly from 25°C free-air temperature at the rate of 1.19 mW/°C.

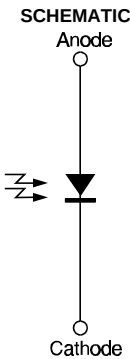


Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

SD2420

Silicon Photodiode

SWITCHING TIME TEST CIRCUIT

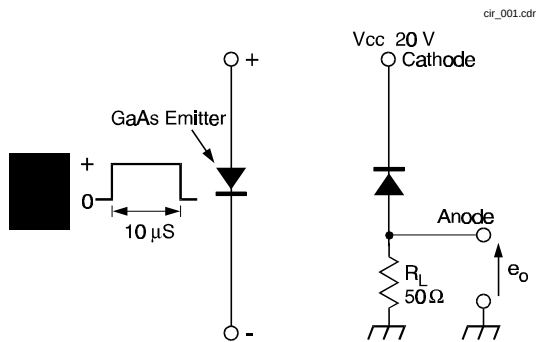

SWITCHING WAVEFORM

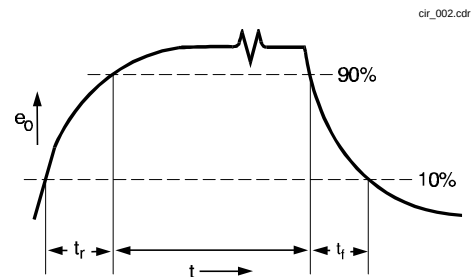


Fig. 1 Responsivity vs Angular Displacement

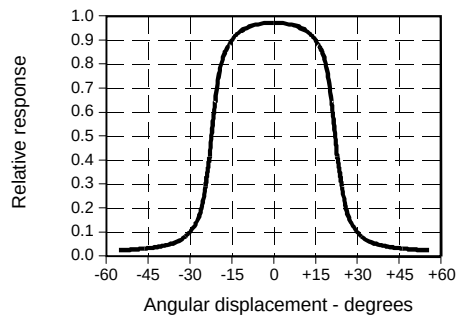


Fig. 2 Dark Current vs Temperature


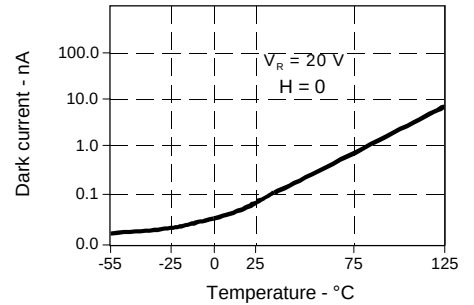


Fig. 3 Spectral Responsivity

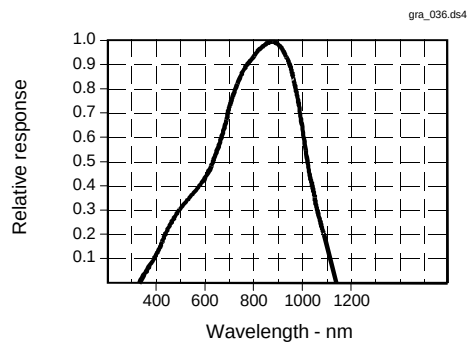

All Performance Curves Show Typical Values

SD2420

Silicon Photodiode



Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell