
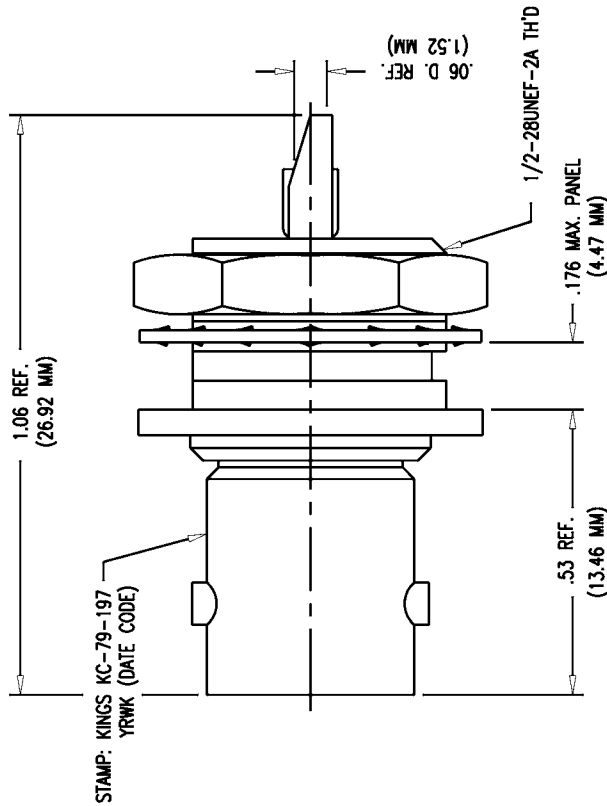


GSD

KC-79-197

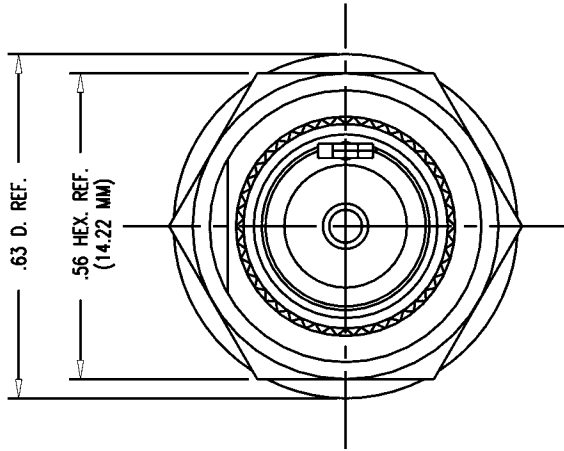

NOTES:

1. INTERFACE PER MIL-STD-348, FIG. 301-2.
2. SAME AS KC-79-67 EXCEPT FINISH & MARKING.

3. MATERIALS:


INSULATORS: TEFLON, ASTM-D-1457
LOCKWASHER: PHOS. BRONZE, QQ-B-750
CENTER CONTACT } BER. COP., ASTM-B-196
LUG
ALL OTHER PARTS: BRASS, ASTM-B16

4. FINISHES:

CENTER CONTACT: GOLD PLATE PER MIL-G-45204.
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)

5. ELECTRICAL CHARACTERISTICS:

NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
INSULATION RESISTANCE: 5000 MEGOHMS MIN.
CONTACT RESISTANCE: CENTER-2.0 MILLIOHMS MAX.



MOUNTING HOLE

GSD

REVISIONS

ISSUE	CHANGES
7	CN 32250 C JCA 06/04/90
8	CN 38656 C REDRAWN TML 09/26/03

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: TEKTRONIX 131-274-00-AG

RECEPTACLE, ISOLATED GROUND, BNC

DRAWN	MASTEN	DATE	03/17/82
DESIGN		DATE	
APPR.	MJB	DATE	03/19/82

KINGSELECTRONICS CO. INC.
ROCK HILL, SOUTH CAROLINA 29730

KC-79-197