


CUSTOMER DRAWING

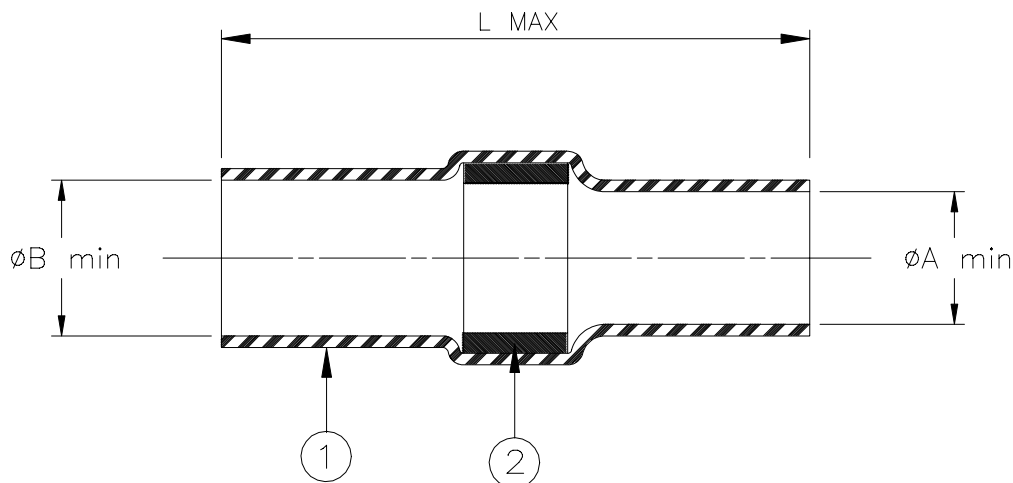


Product Name	Product Dimensions		
	L MAX	A min	B min
D-110-41	27.6 (1.090)	2.7 (0.105)	3.2 (0.125)

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked polyvinylidene fluoride, transparent blue.
2. SOLDER PREFORM WITH FLUX:
Solder: Sn63 Pb37 per ANSI J-STD-006.
Flux: ROL1 per ANSI-J-STD-004.

NOTES

- A. The parts covered by this drawing are for use in splicing tin or silver-plated solid conductors having a combined diameter between 1.27 (.050) and 2.54 (1.00) when twisted together.
- B. Parts will meet the requirements of Raychem Specification RT-1404 when installed properly.
TEMPERATURE RATING: -55C to +150C.

 Tyco Electronics		Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: SOLDERSLEEVE DEVICE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices		DOCUMENT NO.: D-110-41		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: A	DATE: 26-Mar-08	
DRAWN BY: PTALLY	CAGE CODE: 06090	REPLACES: D980623	ECO NUMBER: 08-007722	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2008 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.