

PXAE261908NF


Thermally-Enhanced High Power RF LDMOS FET 240 W, 28 V, 2515 – 2675 MHz

Description

The PXAE261908NF is a 240-watt (P_{3dB}) LDMOS FET intended for use in multi-standard cellular power amplifier applications in the 2515 to 2675 MHz frequency band. Features include input and output matching, high gain and a thermally-enhanced package with earless flange. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PXAE261908NF
Package PG-HBSOF-6-3

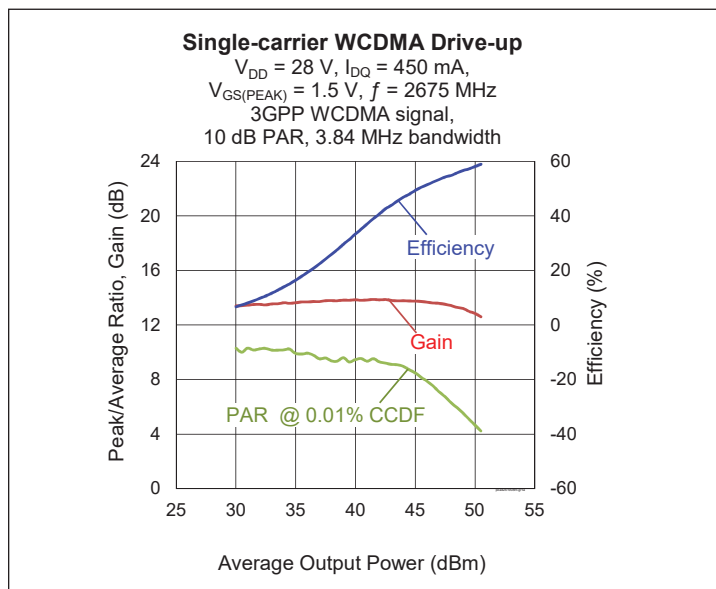

Features

- Broadband internal input and output matching
- Asymmetric Doherty design
 - Main: $P_{3dB} = 90\text{ W}$ typical
 - Peak: $P_{3dB} = 180\text{ W}$ typical
- Typical pulsed CW performance, 2675 MHz, 28 V
 - Output power at $P_{1dB} = 51\text{ W}$
 - Output power at $P_{3dB} = 240\text{ W}$
 - Gain = 11.8 dB
 - Efficiency = 60%
- Capable of handling 10:1 VSWR at 28 V, 32 W (CW) output power
- Integrated ESD protection
- Human Body Model, Class 2 (per ANSI/ESDA/JEDEC JS-001)
- Low thermal resistance
- Pb-free and RoHS compliant

RF Characteristics

Single-carrier WCDMA Specifications (tested in Wolfspeed Doherty test fixture)

$V_{DD} = 28\text{ V}$, $I_{DQ} = 450\text{ mA}$, $V_{GS(PEAK)} = 1.5\text{ V}$, $P_{OUT} = 32\text{ W}$ avg, $f = 2675\text{ MHz}$, 3GPP signal, channel bandwidth = 3.84 MHz, peak/average = 10 dB @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	12.8	13.5	—	dB
Drain Efficiency	η_D	45	47.5	—	%
Adjacent Channel Power Ratio	ACPR	—	-28	-26	dBc
Output PAR at 0.01% probability on CCDF	OPAR	7.6	8	—	dB

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

RoHS
COMPLIANT

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1	μA
	$V_{DS} = 63\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	10	μA
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1	μA
On-state Resistance	(main) $V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.08	—	Ω
	(peak) $V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.03	—	Ω
Operating Gate Voltage	(main) $V_{DS} = 28\text{ V}$, $I_{DQ} = 450\text{ mA}$	V_{GS}	2.7	3	3.3	V
	(peak) $V_{DS} = 28\text{ V}$, $I_{DQ} = 0\text{ mA}$	V_{GS}	—	1.5	—	V

Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source Voltage	V_{DSS}	65	V
Gate-source Voltage	V_{GS}	−6 to +10	V
Operating Voltage	V_{DD}	0 to +32	V
Junction Temperature	T_J	225	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	−65 to +150	$^{\circ}\text{C}$

Thermal Characteristics


Characteristic	Symbol	Value	Unit
Thermal Resistance	(main, $T_{CASE} = 70^{\circ}\text{C}$, 32 W CW)	$R_{\theta JC}$	0.96 $^{\circ}\text{C/W}$
	(peak, $T_{CASE} = 70^{\circ}\text{C}$, 56 W CW)	$R_{\theta JC}$	0.36 $^{\circ}\text{C/W}$

Ordering Information


Type and Version	Order Code	Package	Shipping
PXAE261908NF V1 R5	PXAE261908NF-V1-R5	PG-HBSOF-6-3	Tape & Reel, 500 pcs

Typical Performance (data taken in a Wolfspeed production test fixture)**Single-carrier WCDMA Drive-up**


$V_{DD} = 28\text{ V}$, $I_{DQ(MAIN)} = 450\text{ mA}$,
 $V_{GS(PEAK)} = 1.5\text{ V}$, $f = 2675\text{ MHz}$
 3GPP WCDMA signal,
 10 dB PAR, 3.84 MHz bandwidth

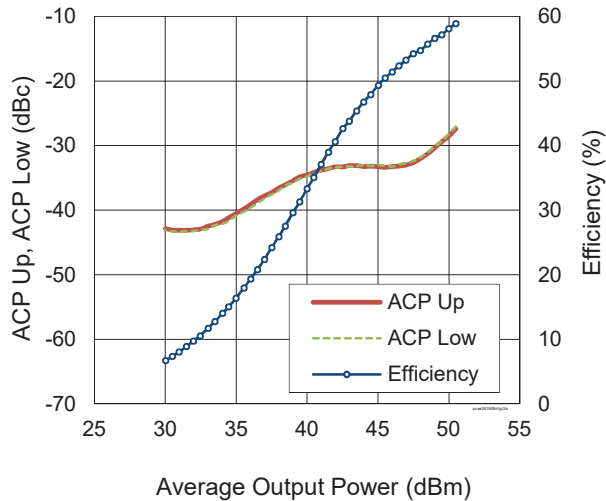**Single-carrier WCDMA Broadband**


$V_{DD} = 28\text{ V}$, $I_{DQ} = 450\text{ mA}$,
 $V_{GS(PEAK)} = 1.5\text{ V}$, $P_{OUT} = 45.05\text{ dBm}$,
 3GPP WCDMA signal
 10 dB PAR, 3.84 MHz bandwidth

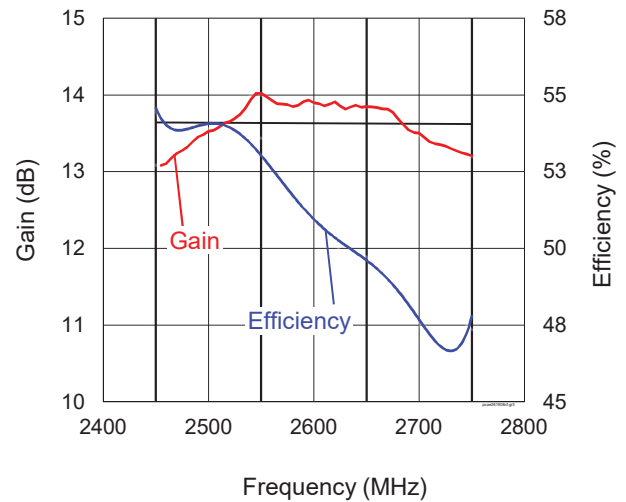**Single-carrier WCDMA Broadband**



$V_{DD} = 28\text{ V}$, $I_{DQ} = 450\text{ mA}$,
 $V_{GS(PEAK)} = 1.5\text{ V}$, $P_{OUT} = 45.05\text{ dBm}$,
 3GPP WCDMA signal
 10 dB PAR, 3.84 MHz bandwidth

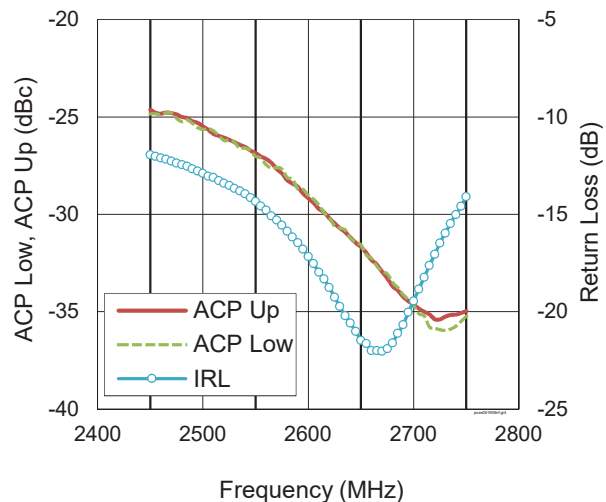**Pulsed CW Performance**

$V_{DD} = 28\text{ V}$, $I_{DQ} = 450\text{ mA}$, $V_{GS(PEAK)} = 1.5\text{ V}$

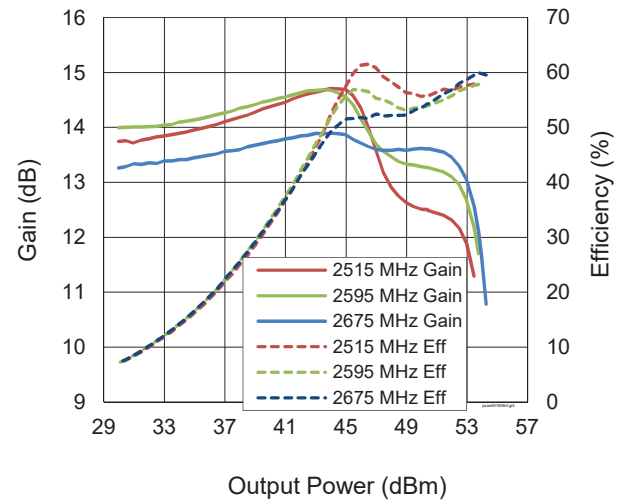

Typical Performance (cont.)

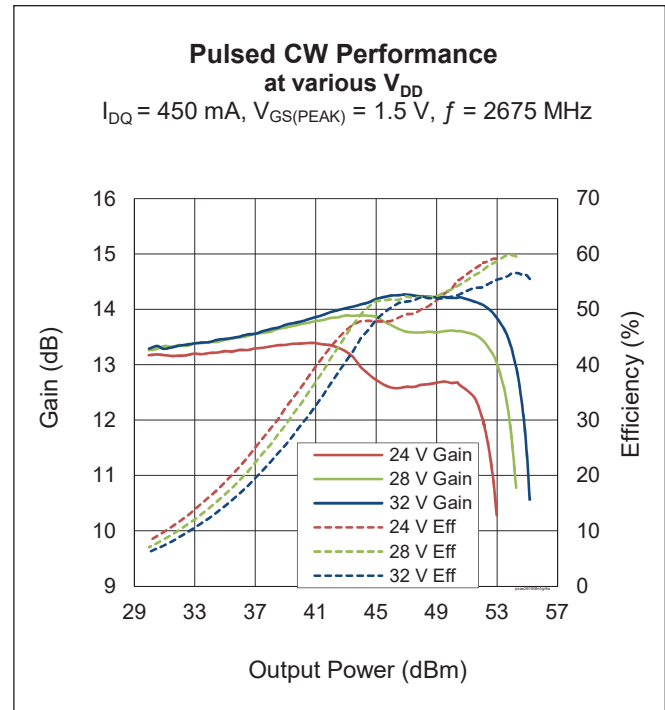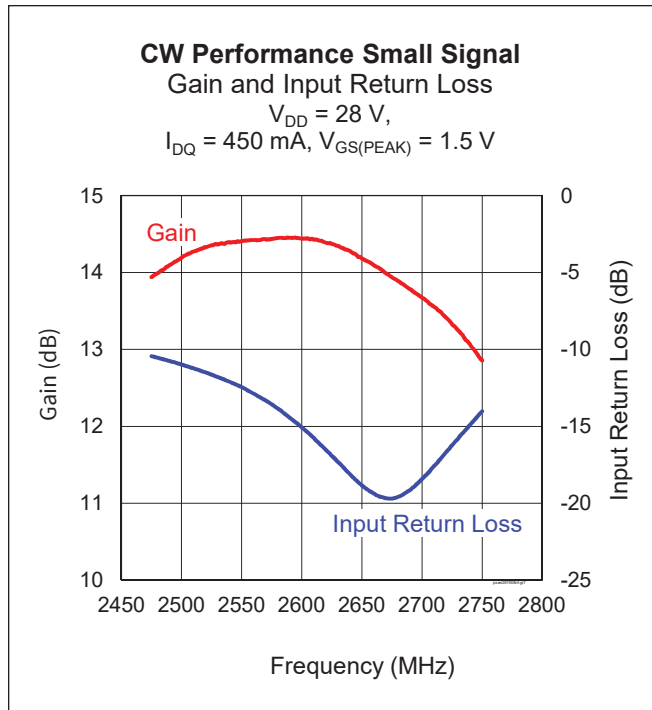

Load Pull

Main Side (Doherty) Load Pull Performance – Pulsed CW signal: 10 μsec pulse width, 10% duty cycle, 28 V, $I_{DQ} = 460\text{ mA}$, class AB

		P_{1dB}									
		Max Output Power					Max Drain Efficiency				
Freq [MHz]	Z_s [Ω]	Z_L [Ω]	Gain [dB]	P_{1dB} [dBm]	P_{3dB} [W]	η_D [%]	Z_L [Ω]	Gain [dB]	P_{1dB} [dBm]	P_{3dB} [W]	η_D [%]
2515	4.7 – j16.2	3.4 – j6.1	16.4	49.30	85	55.4	5.6 – j4.0	18.1	48.14	65	63.0
2595	7.5 – j18.4	3.3 – j6.3	16.4	49.30	85	54.8	5.6 – j4.7	18.2	48.15	65	62.0
2675	12.4 – j22.5	3.3 – j6.5	16.7	48.70	74	49.3	5.5 – j4.7	18.6	47.70	59	56.0

		P_{3dB}									
		Max Output Power					Max Drain Efficiency				
Freq [MHz]	Z_s [Ω]	Z_L [Ω]	Gain [dB]	P_{3dB} [dBm]	P_{3dB} [W]	η_D [%]	Z_L [Ω]	Gain [dB]	P_{3dB} [dBm]	P_{3dB} [W]	η_D [%]
2515	4.7 – j16.2	3.3 – j6.4	14.2	50.04	101	55.3	5.7 – j4.1	16.1	48.80	76	63.0
2595	7.5 – j18.4	3.0 – j6.8	14.0	50.11	103	54.0	5.4 – j4.8	16.1	48.90	78	62.0
2675	12.4 – j22.5	3.3 – j7.1	14.4	49.60	91	49.3	5.4 – j4.2	16.7	48.30	68	56.0

Tables continued next page

Load Pull (cont.)**Peak Side Doherty Load Pull Performance** – Pulsed CW signal: 10 μ sec pulse width, 10% duty cycle, $V_{DD} = 28$ V, $I_{DQ} = 10$ mA, class B


		P_{1dB}									
		Max Output Power					Max Drain Efficiency				
Freq [MHz]	Z_s [Ω]	Z_L [Ω]	Gain [dB]	P_{3dB} [dBm]	P_{1dB} [W]	η_D [%]	Z_L [Ω]	Gain [dB]	P_{1dB} [dBm]	P_{3dB} [W]	η_D [%]
2515	3.0 – j13.2	4.4 – j7.1	14.2	52.50	178	58.2	4.7 – j3.6	15.4	51.00	126	66.0
2595	3.4 – j14.5	4.7 – j8.1	14.1	52.33	171	53.4	4.4 – j4.1	15.7	50.90	123	64.0
2675	6.3 – j15.0	5.8 – j8.7	14.4	52.20	166	52.7	4.7 – j5.0	15.8	51.00	126	60.0

		P_{3dB}									
		Max Output Power					Max Drain Efficiency				
Freq [MHz]	Z_s [Ω]	Z_L [Ω]	Gain [dB]	P_{3dB} [dBm]	P_{3dB} [W]	η_D [%]	Z_L [Ω]	Gain [dB]	P_{3dB} [dBm]	P_{3dB} [W]	η_D [%]
2515	3.0 – j13.2	4.9 – j8.1	11.8	53.12	205	55.5	5.0 – j3.9	13.4	51.80	151	65.0
2595	3.4 – j14.5	5.7 – j8.7	12.0	53.00	200	53.3	4.8 – j4.8	13.5	52.00	158	63.0
2675	6.3 – j15.0	6.3 – j8.9	12.3	52.80	191	52.4	4.7 – j5.4	13.6	51.90	155	60.0

See next page for evaluation circuit information.

Evaluation Circuit, 2515 – 2675 MHz

DUT	PXAE261908NF V1
Test Fixture Part No.	LTA/PXAE261908NF-V1
PCB	Rogers 4350B LoPro , 0.526 mm [0.0207"] thick, 1 oz. copper, $\epsilon_r = 3.66$

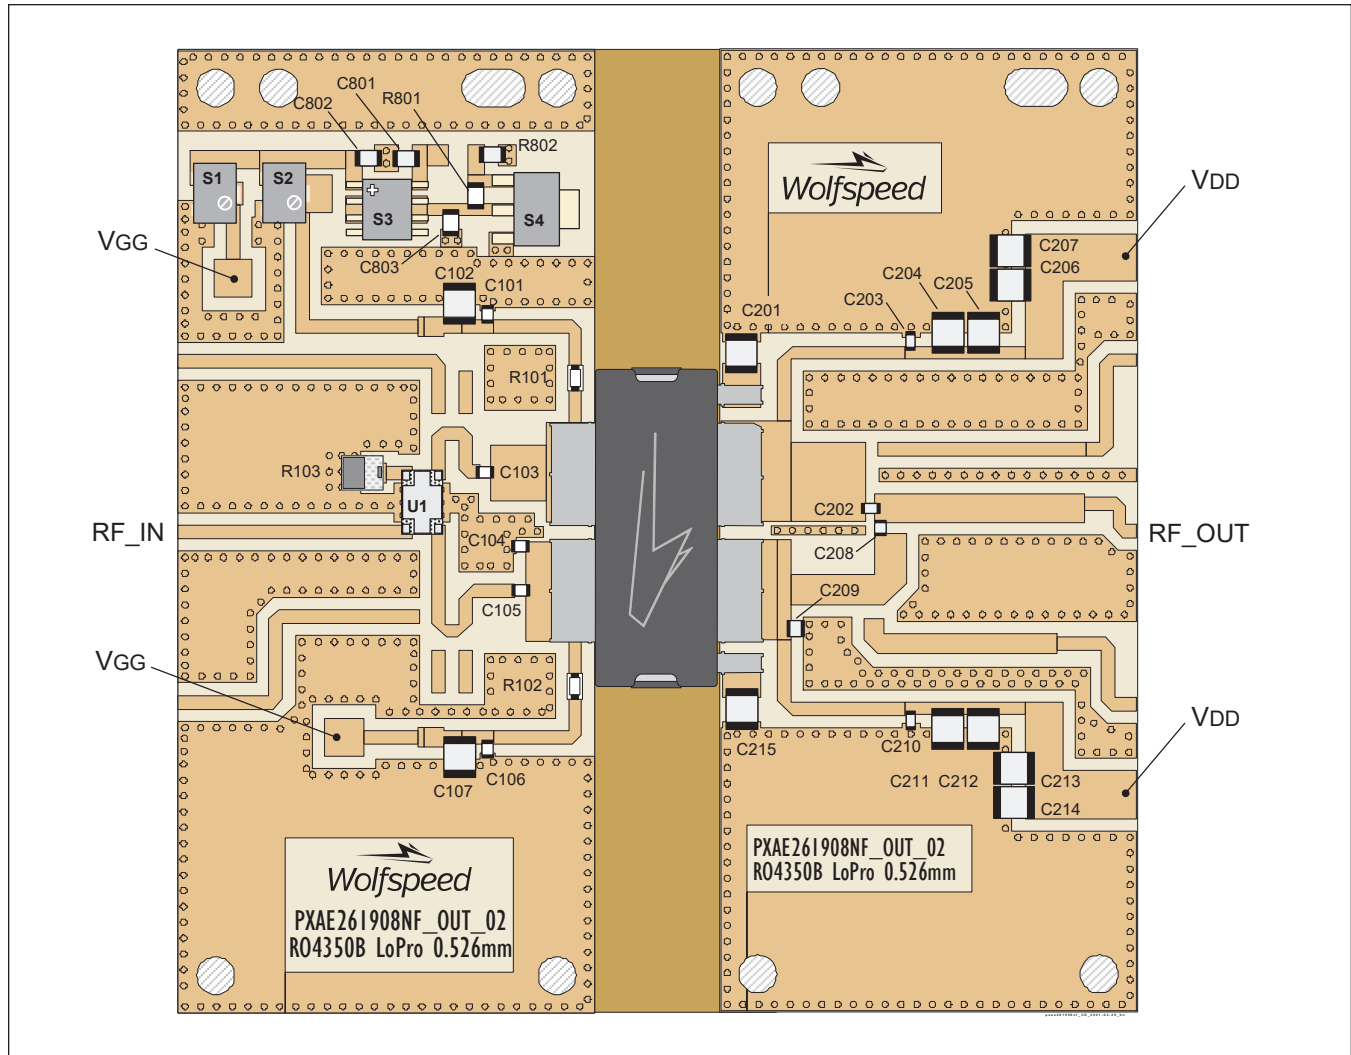

Evaluation circuit assembly diagram (not to scale)

Bias Sequencing

Bias ON

1. Ensure RF is turned off
2. Apply pinch-off voltage of 0 V to the gate
3. Apply nominal drain voltage
4. Bias gate to desired quiescent drain current
5. Apply RF

Bias OFF

1. Turn RF off
2. Apply pinch-off voltage of 0 V to the gate
3. Turn off drain voltage
4. Turn off gate voltage




Evaluation Circuit (cont.)

Components Table

Component	Description	Manufacturer	P/N
Input			
C101, C103, C105, C106	Capacitor, 20 pF	ATC	ATC800A200JT250T
C102, C107	Capacitor, 10 μF, 50 V	Taiyo Yuden	UMK325C7106MM-T
C104	Capacitor, 0.6 pF	ATC	ATC800A0R6CT250T
R101, R102	Resistor, 2.49 ohms	Vishay Dale	CRCW12062R49FKEA
R103	Resistor, 50 ohms	RICHARDSON	C8A50Z4A
U1	Hybrid coupler	ANAREN	X3C35P1-02S
C801,C802, C803	Capacitor, 1,000 pF	Murata Electronics	GRM188R72A102KA01D
R801	Chip resistor, 1.2K ohms	Panasonic Electronic Components	ERJ-3GEYJ122V
R802	Chip resistor, 1.3K ohms	Panasonic Electronic Components	ERJ-3GEYJ132V
S1, S2	Variable resistor, 2K ohms	Bourns Inc.	3224W-1-202E
S3	Voltage regulator	Texas Instruments	LM78L05ACM
S4	Transistor	Diodes Incorporated	BCP5616TA
Output			
C201, C204, C205, C206, C207, C211, C212, C213, C214, C215	Capacitor, 10 μF, 50 V	Taiyo Yuden	UMK325C7106MM-T
C202	Capacitor, 3.9 pF	ATC	ATC800A3R9CT250T
C203, C208, C210	Capacitor, 20 pF	ATC	ATC800A200JT250T
C209	Capacitor, 1.0 pF	ATC	ATC100B1R0CW500XB

Pinout Diagram (top view)

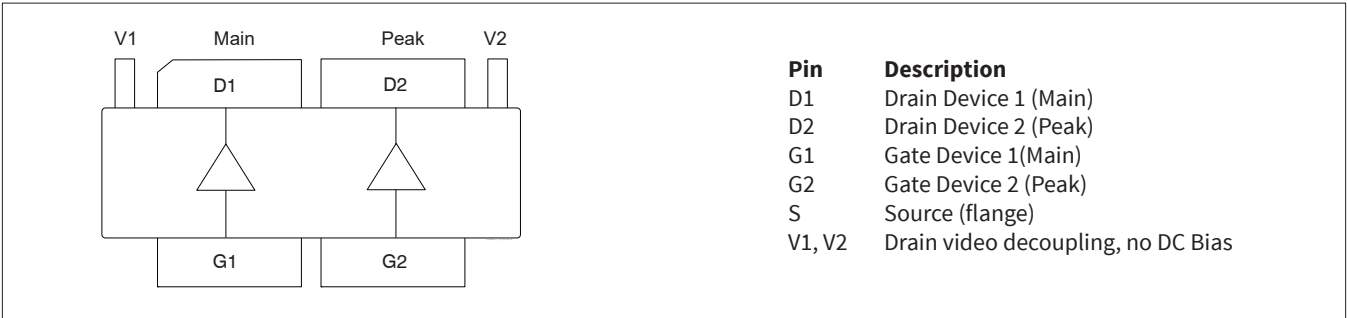

Package Outline Specifications

Package PG-HBSOF-6-3

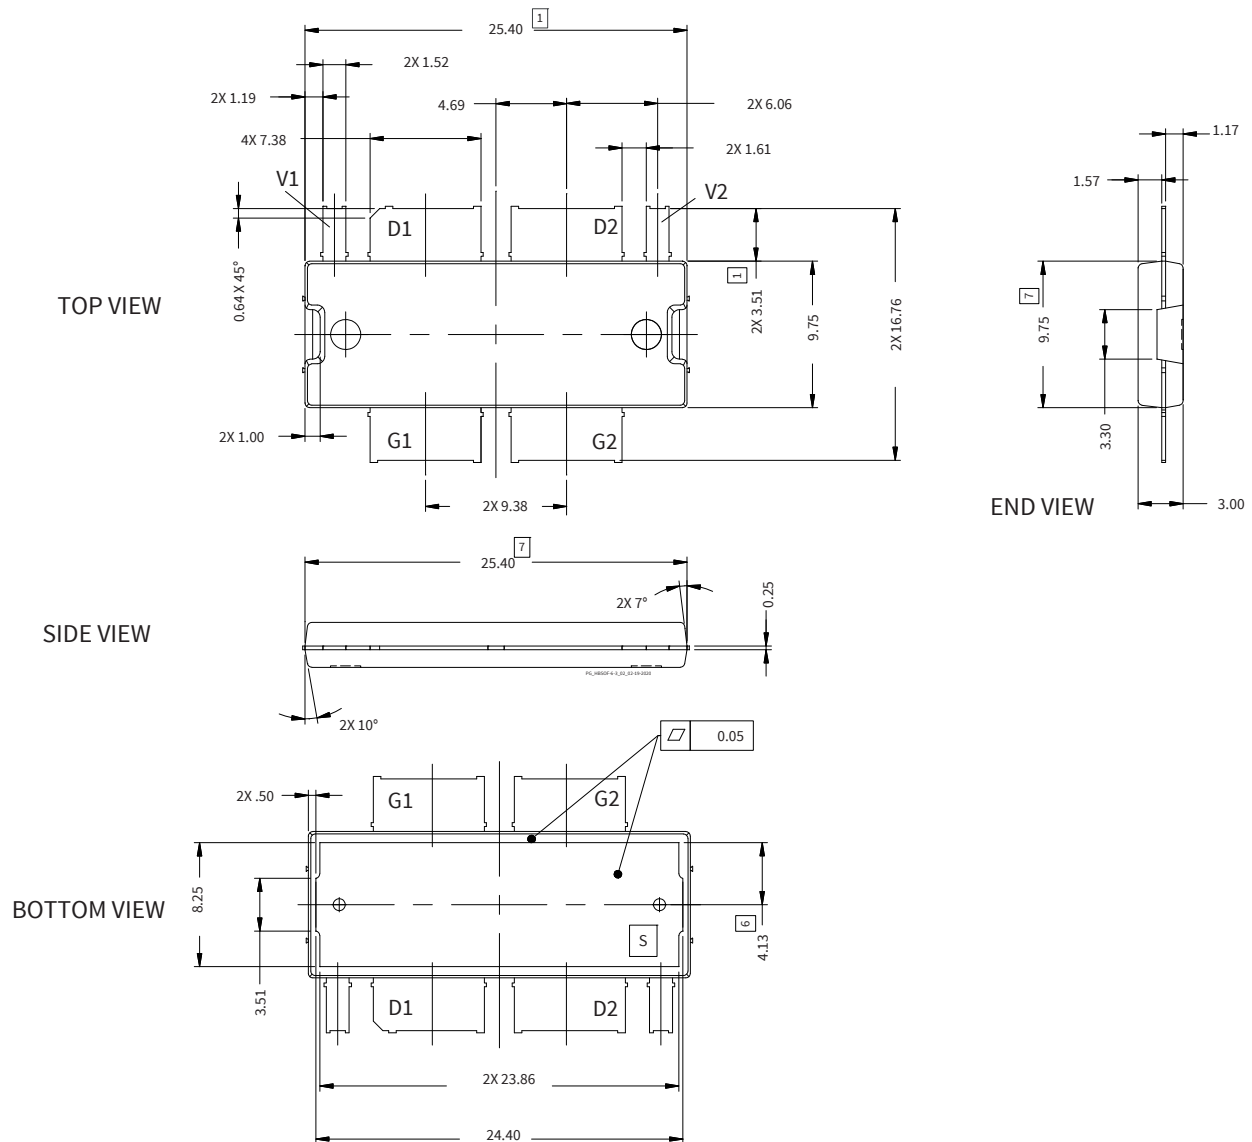


Diagram Notes—unless otherwise specified:

1. Mold/dam bar/metal protusion of 0.30 mm max per side not included.
2. Metal protrusion are connected to source and shall not exceed 0.10 mm max.
3. Fillets and radii: all radii are 0.3 mm max.
4. Interpret dimensions and tolerances per ISO 8015.
5. Dimensions are mm.
6. Exposed metal surface is tin-plated, may not be covered by mold compound.
7. Does not include mold/dam bar/metal protusion.
8. All tolerances ± 0.1 mm unless specified otherwise.
9. All metal surfaces pre-plated, except area of cut.
10. Lead thickness: 0.25 mm.
11. Pins: D1, D2 = drain; G1, G2 = gate; S = source; V1, V2 = drain video decoupling, not for DC bias.

**For more information, please contact:**

4600 Silicon Drive
Durham, NC 27703 USA
Tel: +1.919.313.5300
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com

Notes & Disclaimer

Specifications are subject to change without notice. “Typical” parameters are the average values expected by Wolfspeed in large quantities and are provided for information purposes only. Wolfspeed products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

© 2023 Wolfspeed, Inc. All rights reserved. Wolfspeed® and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc.
PATENT: <https://www.wolfspeed.com/legal/patents>

The information in this document is subject to change without notice.