


PRO DCDC 120W 24V 5A**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

The DC/DC converter compensates for voltage fluctuations, such as those that occur with unregulated power supplies or long cables. With galvanic isolation and protection class III for earth-free systems, the DC/DC converter is particularly suitable for use in independent supply systems. The space-saving module can optimally convert voltage levels, offers above-average power performance, comprehensive safety functions, and a high efficiency of up to 95 %.

General ordering data

Version	DC/DC converter
Order No.	2001800000
Type	PRO DCDC 120W 24V 5A
GTIN (EAN)	4050118383836
Qty.	1 pc(s).

Creation date August 19, 2024 4:36:44 PM CEST

Catalogue status 17.08.2024 / We reserve the right to make technical changes.

PRO DCDC 120W 24V 5A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	120 mm	Depth (inches)	4.724 inch
Height	130 mm	Height (inches)	5.118 inch
Width	32 mm	Width (inches)	1.26 inch
Net weight	767 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-25 °C...70 °C
Humidity at operating temperature	5...95 %, no condensation	Humidity	5...95 %, no condensation

Input

Connection system	DC input voltage range	14...32 V (during operation), 18...32 V (commissioning)
Screw connection	Inrush Current Limitation	Yes
Input fuse (internal)	Nominal power consumption	130.4 VA
Inrush current	Recommended back-up fuse	10 A, Char. B circuit breaker, 10 A, Char. C circuit breaker
Rated input voltage	24 V DC	

Output

Capacitive load	unrestricted																				
Connection system	Screw connection																				
Continuous output current @ U_{Nominal}	5 A @ 40 °C, 6 A @ 45 °C, 3,75 A @ 70 °C																				
DCL - peak load reserve	<table> <tr><td>Multiple of the rated current</td><td>150 %</td></tr> <tr><td>Boost duration</td><td>5 s</td></tr> <tr><td>Multiple of the rated current</td><td>200 %</td></tr> <tr><td>Boost duration</td><td>200 ms</td></tr> <tr><td>Multiple of the rated current</td><td>300 %</td></tr> <tr><td>Boost duration</td><td>100 ms</td></tr> <tr><td>Multiple of the rated current</td><td>400 %</td></tr> <tr><td>Boost duration</td><td>50 ms</td></tr> <tr><td>Multiple of the rated current</td><td>600 %</td></tr> <tr><td>Boost duration</td><td>20 ms</td></tr> </table>	Multiple of the rated current	150 %	Boost duration	5 s	Multiple of the rated current	200 %	Boost duration	200 ms	Multiple of the rated current	300 %	Boost duration	100 ms	Multiple of the rated current	400 %	Boost duration	50 ms	Multiple of the rated current	600 %	Boost duration	20 ms
Multiple of the rated current	150 %																				
Boost duration	5 s																				
Multiple of the rated current	200 %																				
Boost duration	200 ms																				
Multiple of the rated current	300 %																				
Boost duration	100 ms																				
Multiple of the rated current	400 %																				
Boost duration	50 ms																				
Multiple of the rated current	600 %																				
Boost duration	20 ms																				
Mains failure bridge-over time	<table> <tr><td>Mains failure bridge-over time, min.</td><td>10 ms</td></tr> <tr><td>Input voltage type</td><td>DC</td></tr> <tr><td>Input voltage</td><td>24 V</td></tr> <tr><td>Output current</td><td>5 A</td></tr> <tr><td>Output voltage</td><td>24 V</td></tr> </table>	Mains failure bridge-over time, min.	10 ms	Input voltage type	DC	Input voltage	24 V	Output current	5 A	Output voltage	24 V										
Mains failure bridge-over time, min.	10 ms																				
Input voltage type	DC																				
Input voltage	24 V																				
Output current	5 A																				
Output voltage	24 V																				
Nominal output current for U_{nom}	5 A @ 60 °C																				
Output current	5 A																				
Output power	120 W																				
Output voltage, max.	29.5 V																				
Output voltage, min.	22.5 V																				
Output voltage, note	(adjustable via potentiometer on front)																				
Overload protection	Yes																				
Parallel connection option	yes, max. 5 (without diode module)																				
Protection against inverse voltage	Yes																				
Ramp-up time	≤ 9 ms (U_{out} : 10%...90%)																				
Rated output voltage	24 V DC ± 1 %																				
Residual ripple, breaking spikes	≤ 20 mVPP @full load																				

Creation date August 19, 2024 4:36:44 PM CEST

Catalogue status 17.08.2024 / We reserve the right to make technical changes.

PRO DCDC 120W 24V 5A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

General data

Adjacent	No	Clip-in foot	metal
Current limiting	150% I_{out}	Degree of efficiency	Typ.: 92 %
Housing version	Metal, corrosion resistant	Humidity	5...95 %, no condensation
Max. perm. air humidity (operational)	5 %...95 % RH	Mounting position, installation notice	Horizontal on TS35 mounting rail. 50 mm of clearance at top & bottom for air circ. Can mount side by side with no space in between., 50 mm clearance at top and bottom for free air circulation, mountable side by side without clearance
Power loss, idling	2 W	Power loss, nominal load	11 W
Protection against over-heating	Yes	Protection against reverse voltages from the load	33...34 V DC
Protection degree	IP20	Short-circuit protection	Yes
Start-up	$\geq -40^{\circ}\text{C}$	Surge voltage category	III

EMC / shock / vibration

Interference immunity test acc. to	EN 61000-4-2 (ESD), EN 61000-4-4 (burst), EN 61000-4-5 (surge), EN 61000-4-6 (conducted), EN 61000-4-3 (HF field)	Limiting of mains voltage harmonic currents	According to EN 61000-3-2
Noise emission in accordance with EN55032	Class B	Shock resistance IEC 60068-2-27	30 g in all directions
Vibration resistance IEC 60068-2-6	2.3 g (15 Hz...150 Hz)		

Insulation coordination

Insulation voltage input / earth	1.5 kV	Insulation voltage output / earth	0.5 kV
Insulation voltage, input/output	1.5 kV	Pollution severity	2
Protection class	III	Surge voltage category	III

Electrical safety (applied standards)

Electrical machine equipment	Acc. to EN60204	For use with electronic equipment	Acc. to EN50178 / VDE0160
Protection against dangerous shock currents	Acc. to VDE0106-101	Protective separation / protection against electrical shock	VDE0100-410 / acc. to DIN57100-410
Safety extra-low voltage	SELV acc. to IEC 60950-1, PELV according to EN 60204-1	Safety transformers for switch-mode power supplies	According to EN 61558-2-16

Connection data (input)

Conductor cross-section, AWG/kcmil, max.	12 AWG	Conductor cross-section, AWG/kcmil, min.	30 AWG
Conductor cross-section, flexible, min.	0.2 mm ²	Conductor cross-section, rigid, max.	4 mm ²
Conductor cross-section, rigid, min.	0.2 mm ²	Connection system	Screw connection
Number of terminals	2 (+, -)	Reverse polarity protection	Yes
Tightening torque, max.	0.5 Nm	Tightening torque, min.	0.4 Nm
Wire connection cross section, flexible (input), max.	4 mm ²		

Creation date August 19, 2024 4:36:44 PM CEST

Catalogue status 17.08.2024 / We reserve the right to make technical changes.

PRO DCDC 120W 24V 5A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Connection data (output)

Conductor cross-section, AWG/kcmil , max.	14 AWG	Conductor cross-section, AWG/kcmil , min.	24 AWG
Conductor cross-section, flexible , max.	2.5 mm ²	Conductor cross-section, flexible , min.	0.2 mm ²
Conductor cross-section, rigid , max.	2.5 mm ²	Conductor cross-section, rigid , min.	0.2 mm ²
Connection system	Screw connection	Number of terminals	8 (+ / - / signal)
Reverse polarity protection	Yes	Tightening torque, max.	0.5 Nm
Tightening torque, min.	0.4 Nm		

Connection data (signal)

Number of terminals	3	Wire connection method	Screw connection
---------------------	---	------------------------	------------------

Signalling

Transistor output, positive-switching	DC OK: 20 mA max., short-circuit-proof, I > 90%: 20 mA max., short-circuit-proof, Low U _{IN} : 20 mA max., short-circuit-proof
---------------------------------------	--

Classifications

ETIM 6.0	EC002540	ETIM 7.0	EC002540
ETIM 8.0	EC002540	ETIM 9.0	EC002540
ECLASS 9.0	27-04-07-01	ECLASS 9.1	27-04-07-01
ECLASS 10.0	27-04-07-01	ECLASS 11.0	27-04-07-01
ECLASS 12.0	27-04-07-01	ECLASS 13.0	27-04-90-02
ECLASS 14.0	27-04-07-01		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
SCIP	6d8cdf22-8230-4af8-86c8-3558c716666d
RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	7a, 7cl

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E258476
Certificate no. (cULusEX)	E470829

Creation date August 19, 2024 4:36:44 PM CEST

Catalogue status 17.08.2024 / We reserve the right to make technical changes.

PRO DCDC 120W 24V 5A

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Downloads


Approval/Certificate/Document of Conformity	ABS Certificate.pdf
	DNV Certificate.pdf
	LR Certificate.pdf
	PRO DCDC 120W 24V 5A UL508 CSA C22.2.pdf
	PRO DCDC UL Class 1,Div.2.pdf
	BV Certificate
	Declaration of Conformity
Engineering Data	CAD data – STEP
User Documentation	Operating Instructions
Catalogues	Catalogues in PDF-format

PRO DCDC 120W 24V 5A

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

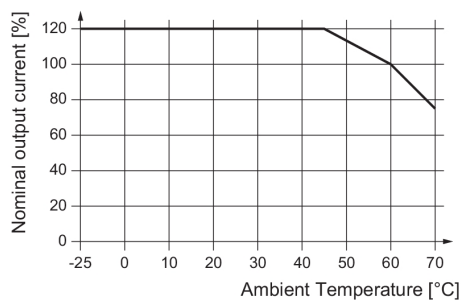


Derating curve


Event	Input	Output	LED (Gr/Ye/Rd)		Transistor status outputs		
			gr = "DC OK"	Ye = "I > 90% I _N "	Rd = "FAlT T"	LED (Ye)	"I ow u _{IN} "
U _{IN} < 14 V	—	—	OFF	ON	—	Low	Low
U _{IN} = 14...19.2 V *1)	I < 90 % I _N	Gr	ON	High	Low	Low	Low
	I > 90 % I _N	Ye	ON	High	High	Low	Low
	U < 20.4 V	Rd	ON	Low	Low	Low	Low
U _{IN} > 19.2 V	I < 90 % I _N	Gr	OFF	High	Low	High	High
	I > 90 % I _N	Ye	OFF	High	High	High	High
	U < 20.4 V	Rd	OFF	Low	Low	High	High

Gr = grün / green / verte / verde / verde / verde / 绿色
 Ye = gelb / yellow / jaune / giallo / amarillo / amarillo / 黄色
 Rd = rot / red / rouge / rosso / rojo / vermelho / 红色
 *1) während des Betriebes / during operations / en cours de fonctionnement / durante l'esercizio / durante el servicio / durante a operação / 运行过程中

Signal states

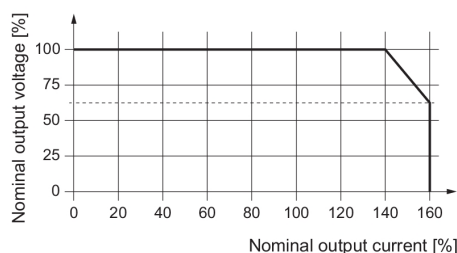

UI characteristic curve

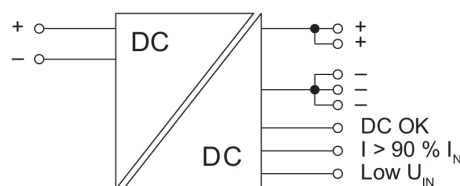

Switching symbol