

WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS

REEL DIA. REF.

FEED DIRECTION

.500 [12.7] MIN. DIA. HOLE THRU

±.030 [±0.78]
.100 [2.54]

3.937 [100.0] REF.

±.005 [±0.13]
.157 [4.0]

±.005 [±0.13]
.059 [1.5] DIA. HOLE (TYP.)

±.005 [±0.13] PITCH

±.005 [±0.13] WIDTH

.079 [2.0]

.590 [15.0] REF.


.551 [14.0]

.016 [0.4] REF.



FEED DIRECTION

KEYSTONE ELECTRONICS CORP. www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME SM BATTERY CLIP, ON TAPE			
MATERIAL AS NOTED			
FINISH AS NOTED		DRN BY NT	DATE 7.22.09
		APP'D RH	SCALE X
TOLERANCES INCH [MM] DECIMAL ± .015 [± 0.38] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED	CODE C	DWG NO. 555TR	

MOUNTING PAD LAYOUT. REQUIRED SPACING FOR 'AAA' OR 'N' BATTERIES

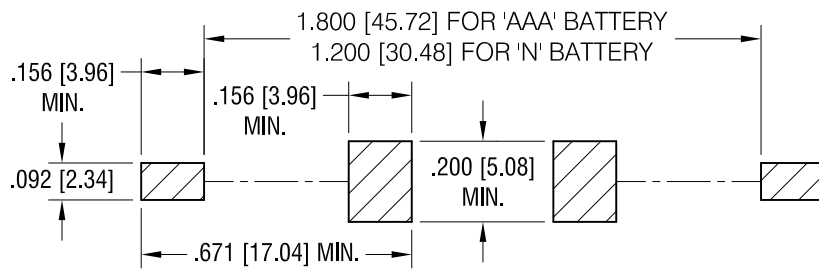

ACTUAL SIZE

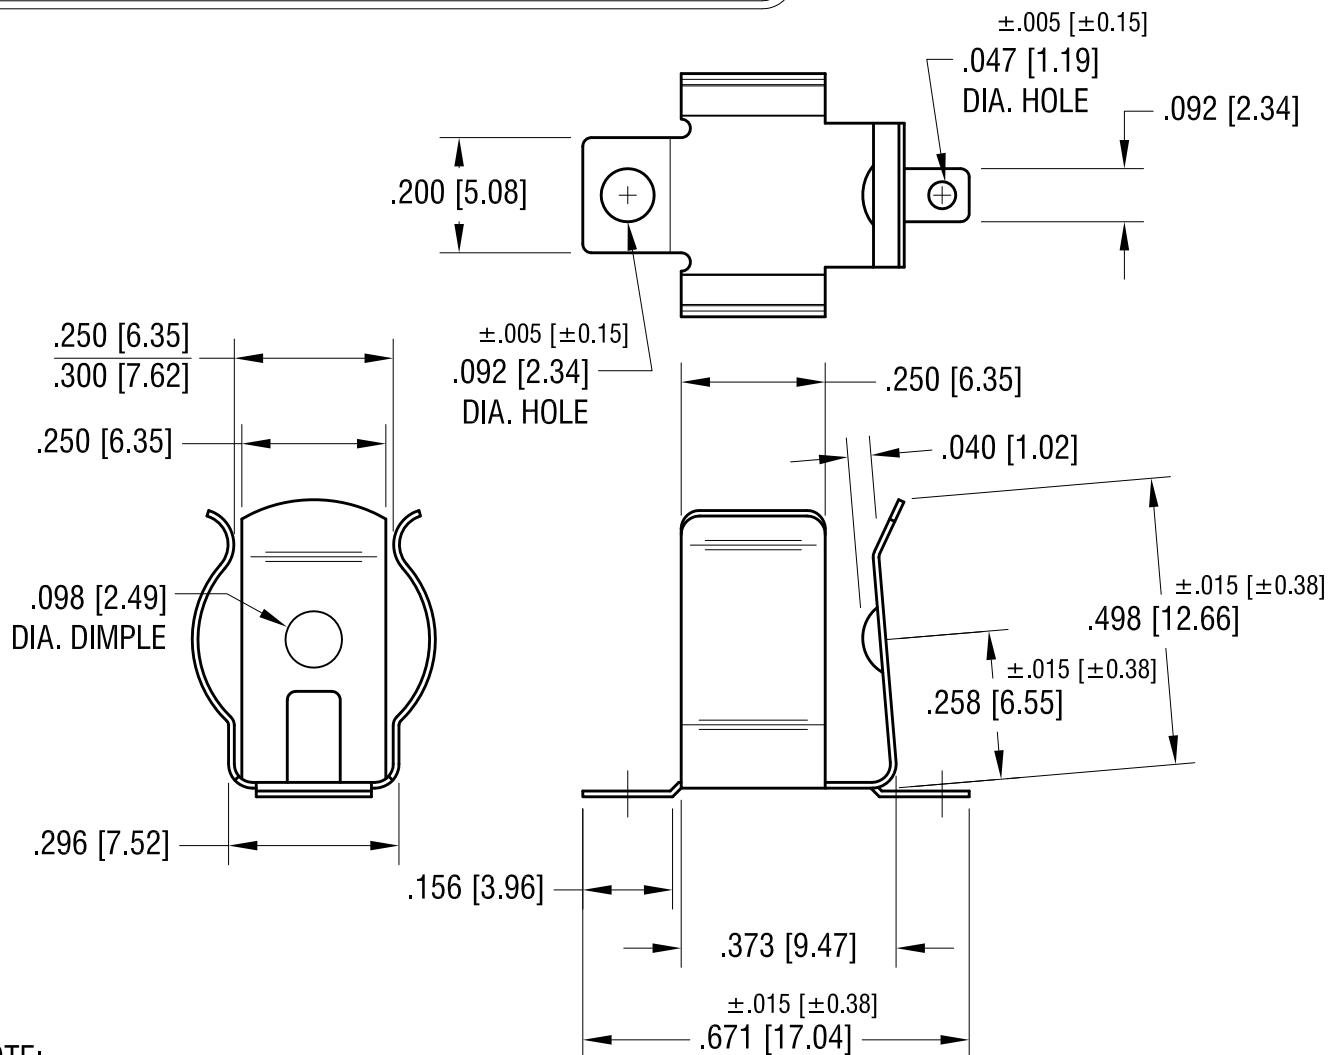

NOTE:

1. HEAT TREAT TO SPRING TEMPER.

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

PART NAME

'AAA'-'N' SMT BATTERY CLIP

MATERIAL

.010 [.25] TH'K ANNEALED SPRING STEEL

FINISH

MATTE TIN PLATE

DRN BY

NT

DATE

7.20.09

APP'D

LN

SCALE

3X

TOLERANCES

INCH [MM]

DECIMAL

±.010 [±0.25]

ANGULAR

± 1°

UNLESS OTHERWISE SPECIFIED

CODE

C

DWG NO.

555

1.30.13 CHANGE AS PER ECN 13-010

A

REV.

DATE

DESCRIPTION