

5



4

3



2

1

Mating face according to : MIL-C24308 / DIN 41652 / CECC 75301-802

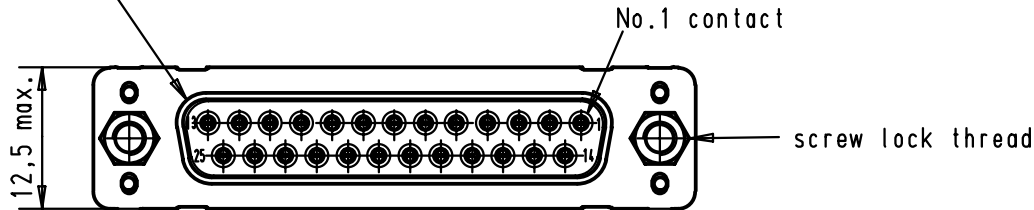

Printed board layout
component side
PTH's plating = tin lead

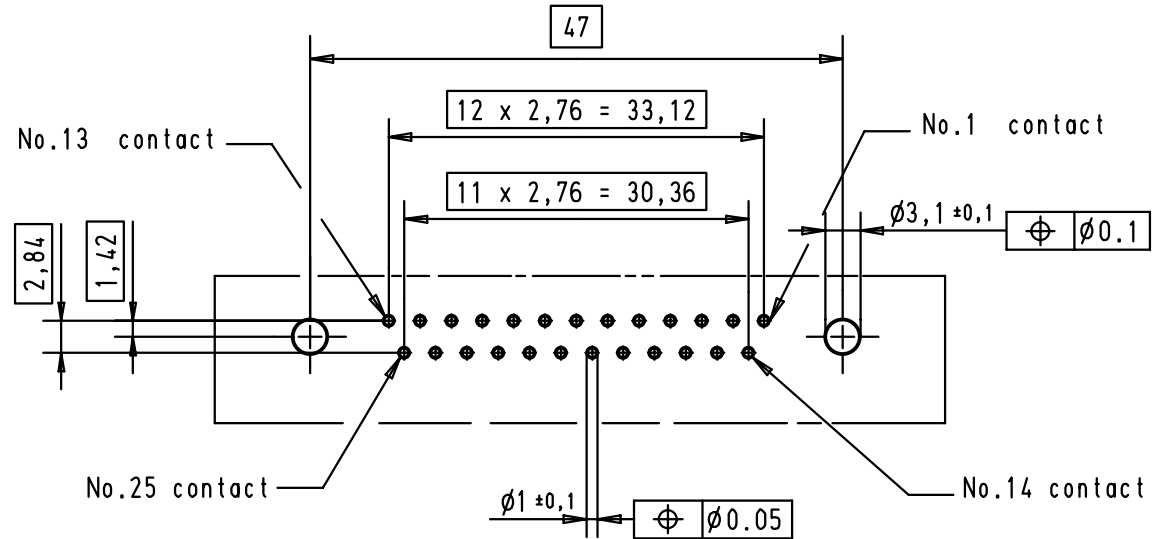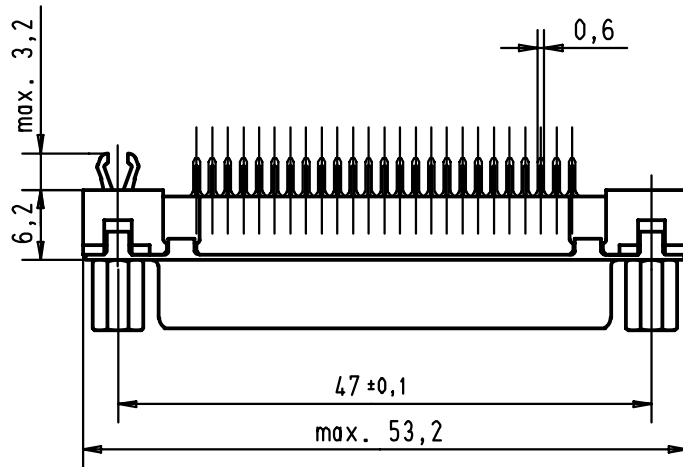

Connector retention and insertion forces on the PCB = 25 / 80 newtons

09 66 351 6533	M3	2					Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-sub, 25 poles, female, straight, with solder pins 2.9, screw lock and grounding board lock	Maßstab/ Scale 1,5:1
09 66 351 7533	M3	3				Detail.	07-FEB-02	JB			
09 66 351 5533	M3	0,76 µm Au				Insp.					
09 66 351 6513	4-40 UNC	2				Stand.					
09 66 351 7513	4-40 UNC	3				HARTING EURL F-95972 Paris				TB 09 66 351 x5x3	Blatt/ Page 1
09 66 351 5513	4-40 UNC	0,76 µm Au	29746	07-FEB-02	JB						
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name					Sub.	