

# OPTIGA™ TPM SLM 9670 TPM2.0

## Trusted Platform Module

### Data Sheet

#### Devices

- SLM 9670AQ2.0

#### TPM Key Features

- Random Number Generator (RNG) according to NIST SP800-90A
- TPM FW update functionality installed
- 6962 Bytes of free NV memory
- Full personalization with Endorsement Key (EK) and EK certificate
- Up to 3 keys in the volatile memory
- Up to 7 keys in the NV memory
- Up to 8 NV counters
- Support of various cryptographic algorithms
  - RSA-1024 and RSA-2048
  - SHA-1 and SHA-256
  - ECC NIST P256
  - ECC BN256

#### Hardware Features

- Qualified for industrial applications (JEDEC JESD-47)
- Highly reliable flash technology with hardening extension for industrial applications
- Enhanced industrial temperature range (-40..+105°C)
- SPI interface up to 43 MHz
- Low standby power consumption (typ. 110µA)
- Supply voltage 1.8V or 3.3V
- PG-VQFN-32-13 package
- Pin compatible to OPTIGA™ TPM SLB9670 TPM1.2

### **Compliance and Security Features**

- Compliant to TPM Main Specification, Family “2.0”, Level 00, Revision 1.38
- Common Criteria EAL4+ certified — 18 December 2018 — Certificate number BSI-DSZ-CC-1100-2018
- TPM2.0 compliant according to TCG test suites
- Sophisticated cryptographic hardware modules (crypto processor and cryptographic engines)
- Internal memory and bus encryption
- Tamper-resistant secure MCU
- Shielding and sensors against physical and logical attacks

### **About this document**

#### **Scope and purpose**

This data sheet describes the OPTIGA™ TPM SLM 9670 TPM2.0 Trusted Platform Module together with its features, functionality and programming interface.

#### **Intended audience**

This data sheet is primarily intended for system developers.

**Table of contents**

|          |                                     |           |
|----------|-------------------------------------|-----------|
| <b>1</b> | <b>General Description</b>          | <b>6</b>  |
| 1.1      | Overview                            | 6         |
| 1.2      | Security Features                   | 6         |
| 1.3      | Main Features and Customer Benefits | 6         |
| 1.4      | Applications and Use Cases          | 7         |
| 1.5      | Power Management                    | 7         |
| <b>2</b> | <b>Block Diagram</b>                | <b>8</b>  |
| <b>3</b> | <b>Pin Description</b>              | <b>9</b>  |
| 3.1      | Typical Schematic                   | 11        |
| <b>4</b> | <b>TPM Properties</b>               | <b>12</b> |
| <b>5</b> | <b>Electrical Characteristics</b>   | <b>13</b> |
| 5.1      | Absolute Maximum Ratings            | 13        |
| 5.2      | Functional Operating Range          | 13        |
| 5.3      | Thermal Resistance                  | 14        |
| 5.4      | DC Characteristics                  | 14        |
| 5.5      | AC Characteristics                  | 15        |
| 5.6      | Timing                              | 17        |
| <b>6</b> | <b>Package Dimensions (VQFN)</b>    | <b>18</b> |
| 6.1      | Packing Type                        | 18        |
| 6.2      | Recommended Footprint               | 18        |
| 6.3      | Chip Marking                        | 19        |

**List of figures**

**List of figures**

|          |                                                                            |    |
|----------|----------------------------------------------------------------------------|----|
| Figure 1 | Block Diagram of OPTIGA™ TPM SLM 9670 .....                                | 8  |
| Figure 2 | Pinout of the OPTIGA™ TPM SLM 9670 (PG-VQFN-32-13 Package, Top View) ..... | 9  |
| Figure 3 | Typical Schematic .....                                                    | 11 |
| Figure 4 | RST# Timing .....                                                          | 16 |
| Figure 5 | Package Dimensions PG-VQFN-32-13 .....                                     | 18 |
| Figure 6 | Tape & Reel Dimensions PG-VQFN-32-13 .....                                 | 18 |
| Figure 7 | Recommended Footprint PG-VQFN-32-13 .....                                  | 18 |
| Figure 8 | Chip Marking PG-VQFN-32-13 .....                                           | 19 |

**List of tables**

**List of tables**

|          |                                                                                     |    |
|----------|-------------------------------------------------------------------------------------|----|
| Table 1  | Buffer Types .....                                                                  | 9  |
| Table 2  | I/O Signals .....                                                                   | 9  |
| Table 3  | Power Supply .....                                                                  | 10 |
| Table 4  | Not Connected .....                                                                 | 10 |
| Table 5  | Infineon Specific Property Values .....                                             | 12 |
| Table 6  | Absolute Maximum Ratings .....                                                      | 13 |
| Table 7  | Functional Operating Range .....                                                    | 13 |
| Table 8  | Thermal Resistance .....                                                            | 14 |
| Table 9  | Current Consumption .....                                                           | 14 |
| Table 10 | DC Characteristics of SPI Interface Pins (SCLK, CS#, MISO, MOSI, RST#, PIRQ#) ..... | 14 |
| Table 11 | DC Characteristics of GPIO and PP Pins .....                                        | 15 |
| Table 12 | Device Reset .....                                                                  | 15 |
| Table 13 | AC Characteristics of SPI Interface .....                                           | 16 |

## General Description

# 1 General Description

This chapter gives a high-level overview of the OPTIGA™ TPM SLM 9670 Trusted Platform Module and its features.

## 1.1 Overview

The OPTIGA™ TPM SLM 9670 (Trusted Platform Module) is a standardized security controller that protects the integrity and authenticity of devices in industrial systems. Built on proven technologies and supporting the latest TPM 2.0 standard, the OPTIGA™ TPM SLM 9670 features include secured storage for keys, certificates and passwords as well as dedicated key management. For details about the TCG specification, please refer to [www.trustedcomputinggroup.org](http://www.trustedcomputinggroup.org).

To simplify system integration into hardware, the OPTIGA™ TPM SLM 9670 uses an SPI interface according to the TCG specification (see [2]). Infineon provides driver software for a simple adaptation to any standard microcontroller SPI interface.

The TPM is a secure controller with added cryptographic functionality:

- High-end security controller with advanced cryptographic algorithms implemented in hardware (for instance, RSA-2048, ECC-256, SHA-256)
- Common Criteria EAL4+ certified — 18 December 2018 — Certificate number BSI-DSZ-CC-1100-2018
- Flexible integration with SPI interface support
- Extended temperature range (-40 to +105°C) for a variety of applications
- Easy to integrate with wide range open source support
- Unique key that identifies each TPM

The OPTIGA™ TPM SLM 9670 is a quality-hardened Trusted Platform Module (TPM) for special use in industrial applications and based on a tamper-resistant secure microcontroller (MCU) using advanced hardware security technology.

As a turn-key solution, it is flashed with a securely coded firmware according to the latest TCG family 2.0 specifications (see [1] and [2]) offering a rich feature set of security functions.

The device is qualified according to the industrial JEDEC JESD-47 standard. It is targeting industrial applications requiring a higher level of security like components of industrial automation and control systems.

The OPTIGA™ TPM SLM 9670 is Common Criteria EAL4+ certified — 18 December 2018 — Certificate number BSI-DSZ-CC-1100-2018. It is available in a PG-VQFN-32-13 package.

## 1.2 Security Features

The security logic consists of sophisticated features, including error detection units, a set of sensors, regulators and filters along with an enhanced signal shield to detect faults as well as electrical and physical conditions, and initiate alarms to indicate security breaches.

## 1.3 Main Features and Customer Benefits

Main features and customer benefits of the industrial OPTIGA™ TPM SLM 9670:

- Reduced risk based on proven technology
- Fast time to market through concept reuse
- Flexibility thanks to wide range of security functions as well as dedicated key management
- Easy integration into all platform architectures and operating systems
- Tamper resistant hardware architecture with performant core and peripheral set (crypto coprocessors, RNG etc.) based on market leading security expertise

## General Description

- Standardized and market approved turn-key security solution, preprogrammed with rich security functions (TCG standard TPM 2.0)
- Highly reliable NVM technology
- Industrial qualification according to JEDEC JESD-47
- Common Criteria EAL4+ certified — 18 December 2018 — Certificate number BSI-DSZ-CC-1100-2018
- Secured key store: secured personalization (key injection in secured environment), additional keys generated on chip
- Plug-and-play security solution: easy and cost efficient system integration through available open source complex drivers

The listed features support demanding customers to cope with increasing security requirements of today's and future complex industrial systems. The OPTIGA™ TPM SLM 9670 as plug-and play security solution helps tremendously to increase systems security level with very limited additional effort in software development and system integration and thus helps to reduce the total cost of ownership of the complete system.

## 1.4 Applications and Use Cases

The OPTIGA™ TPM SLM 9670, a member of the OPTIGA™ family, is a turn-key high security solution offering tamper resistance and strong functional security protection to industrial applications, which due to their functionality have an enhanced demand for security.

The industrial OPTIGA™ TPM SLM 9670 provides an outstanding level of security, from hardware as well as from software point of view. The standardized TPM 2.0 OPTIGA™ TPM SLM 9670 provides more than 90 commands according the TCG Specification [\[1\]](#) like

- key generation
- life cycle key management (key duplication back-up and refurbishment)
- authentication
- signature functions (signing / verifying)
- encryption / decryption
- secured logging
- secured time

The OPTIGA™ TPM SLM 9670 offers ready-to-use security to complex industrial systems and supports industrial security use cases like

- secured key store and management
- remote attestation
- device identity
- protection of software and configuration data
- privacy protection
- protection of secrets and intellectual property
- diagnostic and remote access

The OPTIGA™ TPM SLM 9670 can be used in various host platforms and host operating systems.


## 1.5 Power Management

In the OPTIGA™ TPM SLM 9670, power management is handled internally; no explicit power-down or standby mode is available. The device automatically enters a low-power state after each successful command/response transaction. If a transaction is started on the SPI bus from the host platform, the device wakes up immediately and returns to the low-power mode after the transaction has been finished.

**Block Diagram**

**2 Block Diagram**


**Figure 1** show a high-level block diagram of the OPTIGA™ TPM SLM 9670.

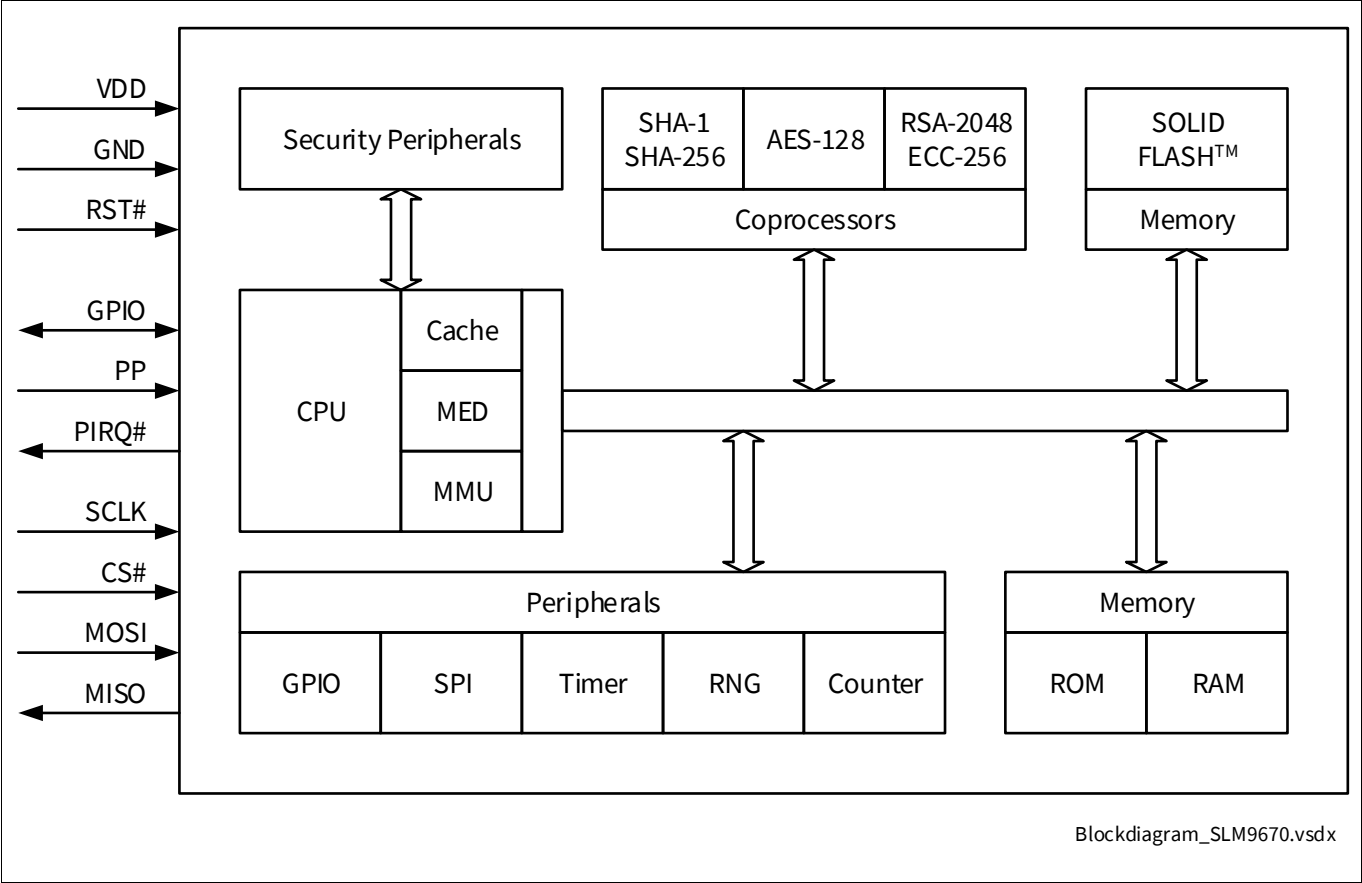

**Figure 1 Block Diagram of OPTIGA™ TPM SLM 9670**

## Pin Description

### 3 Pin Description

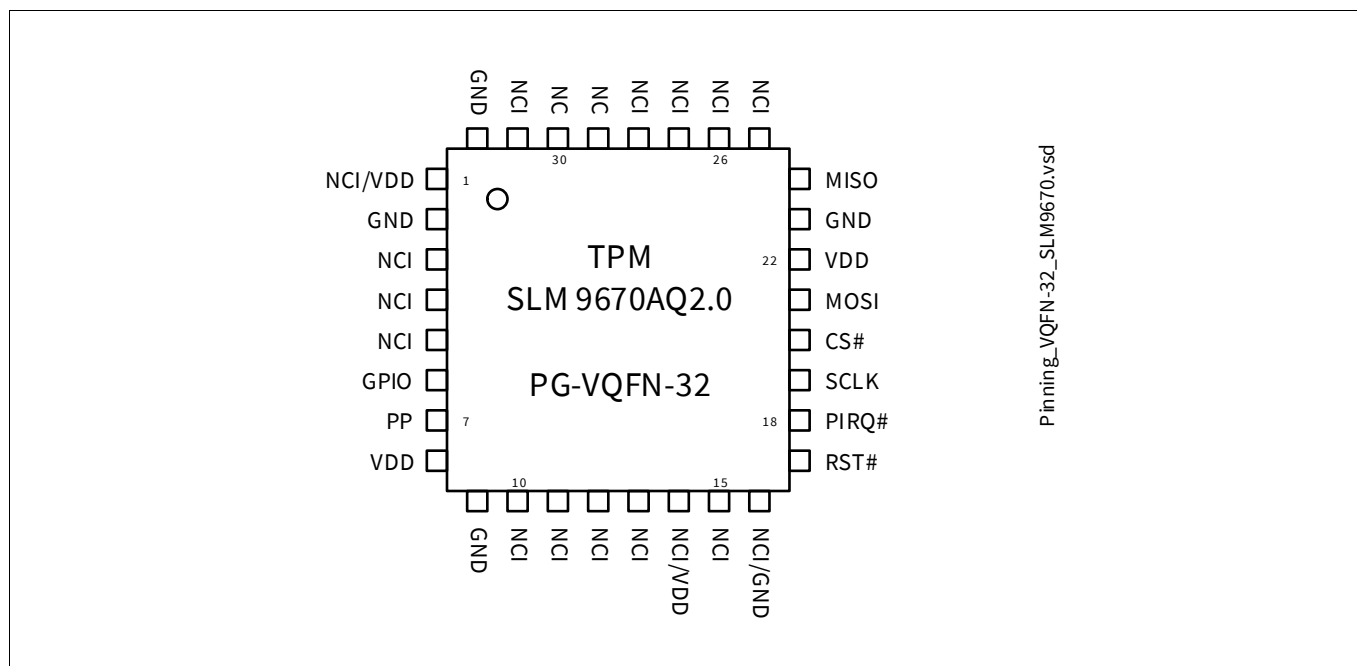

**Figure 2 Pinout of the OPTIGA™ TPM SLM 9670 (PG-VQFN-32-13 Package, Top View)**

**Table 1 Buffer Types**

| Buffer Type | Description         |
|-------------|---------------------|
| TS          | Tri-State pin       |
| ST          | Schmitt-Trigger pin |
| OD          | Open-Drain pin      |

**Table 2 I/O Signals**

| Pin Number    | Name  | Pin Type | Buffer Type | Function                                                                                                                                 |
|---------------|-------|----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------|
| PG-VQFN-32-13 |       |          |             |                                                                                                                                          |
| 20            | CS#   | I        | ST          | <b>Chip Select</b><br>The SPI chip select signal (active low).                                                                           |
| 19            | SCLK  | I        | ST          | <b>SPI Clock</b><br>The SPI clock signal. Only SPI mode 0 is supported by the device.                                                    |
| 21            | MOSI  | I        | ST          | <b>Master Out Slave In (SPI Data)</b><br>SPI data which is received from the master.                                                     |
| 24            | MISO  | O        | TS          | <b>Master In Slave Out (SPI Data)</b><br>SPI data which is sent to the SPI bus master.                                                   |
| 18            | PIRQ# | O        | OD          | <b>Interrupt Request</b><br>Interrupt request signal to the host. The pin has no internal pull-up resistor. The interrupt is active low. |

## Pin Description

**Table 2 I/O Signals** (continued)

| Pin Number    | Name | Pin Type | Buffer Type | Function                                                                                                                                                                                                                           |
|---------------|------|----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PG-VQFN-32-13 |      |          |             |                                                                                                                                                                                                                                    |
| 17            | RST# | I        | ST          | <b>Reset</b><br>External reset signal. Asserting this pin unconditionally resets the device. The signal is active low and is typically connected to the PCIRST# signal of the host. This pin has a weak internal pull-up resistor. |
| 6             | GPIO | I/O      | TS          | <b>GPIO-Express-00 Signal</b><br>The TPM 2.0 device does not use this functionality. This pin may be left unconnected; it has an internal pull-up resistor.                                                                        |
| 7             | PP   | I        | ST          | <b>Physical Presence</b><br>The TPM2.0 device does not use this functionality. This pin may be left unconnected; it has an internal pulldown resistor.                                                                             |

**Table 3 Power Supply**

| Pin Number    | Name | Pin Type | Buffer Type | Function                                                                                                              |
|---------------|------|----------|-------------|-----------------------------------------------------------------------------------------------------------------------|
| PG-VQFN-32-13 |      |          |             |                                                                                                                       |
| 8, 22         | VDD  | PWR      | —           | <b>Power Supply</b><br>All VDD pins must be connected externally and should be bypassed to GND via 100 nF capacitors. |
| 2, 9, 23, 32  | GND  | GND      | —           | <b>Ground</b><br>All GND pins must be connected externally.                                                           |

**Table 4 Not Connected**

| Pin Number                      | Name    | Pin Type | Buffer Type | Function                                                                                                                                                                                                                            |
|---------------------------------|---------|----------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PG-VQFN-32-13                   |         |          |             |                                                                                                                                                                                                                                     |
| 29, 30                          | NC      | NU       | —           | <b>No Connect</b><br>All pins must not be connected externally (must be left floating).                                                                                                                                             |
| 3 - 5, 10 - 13, 15, 25 - 28, 31 | NCI     | —        | —           | <b>Not Connected Internally</b><br>All pins are not connected internally (can be connected externally).                                                                                                                             |
| 1                               | NCI/VDD | —        | —           | <b>Not Connected Internally/VDD</b><br>This pin is not connected internally (can be connected externally).<br>Note that pin 1 is defined as VDD in the TCG specification [2].<br>To be compliant, VDD can be connected to this pin. |


## Pin Description

**Table 4 Not Connected** (continued)

| Pin Number           | Name    | Pin Type | Buffer Type | Function                                                                                                                                                                                                                                                                                 |
|----------------------|---------|----------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PG-VQFN-32-13</b> |         |          |             |                                                                                                                                                                                                                                                                                          |
| 14                   | NCI/VDD | —        | —           | <b>Not Connected Internally/VDD</b><br>This pin is not connected internally (can be connected externally).<br>Note that pin 14 is defined as VDD in the TCG specification [2].<br>To be compliant and to ensure upwards compatibility to future TPMs, VDD must be connected to this pin. |
| 16                   | NCI/GND | —        | —           | <b>Not Connected Internally/GND</b><br>This pin is not connected internally (can be connected externally).<br>Note that pin 16 is defined as GND in the TCG specification [2]. To be compliant, GND can be connected to this pins.                                                       |

## 3.1 Typical Schematic

**Figure 3** shows the typical schematic for the OPTIGA™ TPM SLM 9670. The power supply pins should be bypassed to GND with capacitors located close to the device.

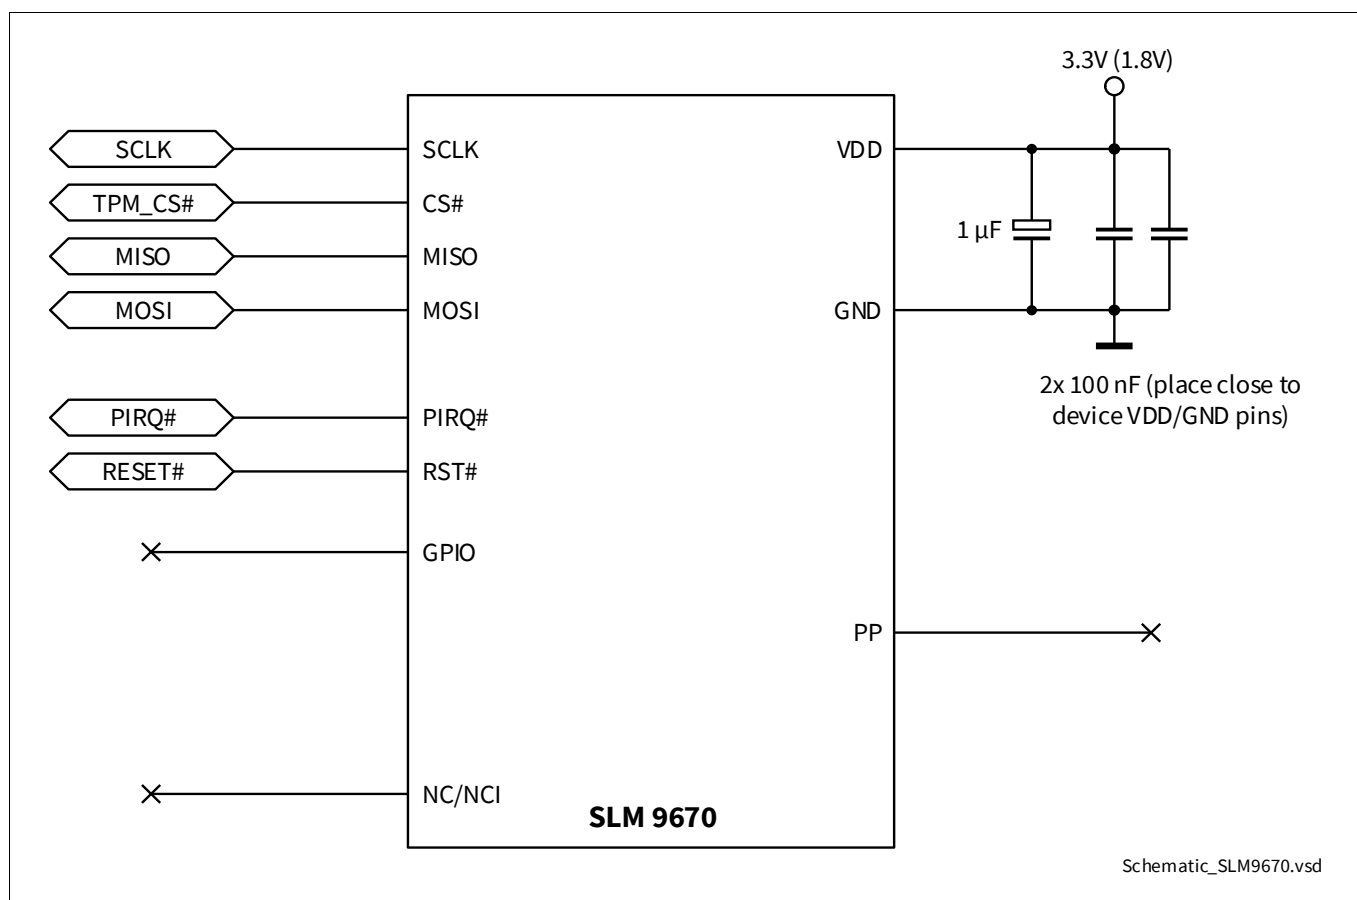

**Figure 3 Typical Schematic**

**TPM Properties**

## 4 TPM Properties

All properties defined within the TPM can be read with the command TPM2\_GetCapability (capability = TPM\_CAP\_TPM\_PROPERTIES). The values are vendor dependent or determined by a platform-specific specification. The following properties are returned by the Infineon OPTIGA™ TPM SLM 9670:

**Table 5 Infineon Specific Property Values**

|                           |                                                                                                                                                                                                                                                                                                              |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TPM_PT_MANUFACTURER       | "IFX"                                                                                                                                                                                                                                                                                                        |
| TPM_PT_VENDOR_STRING_1    | "SLM9"                                                                                                                                                                                                                                                                                                       |
| TPM_PT_VENDOR_STRING_2    | "670"                                                                                                                                                                                                                                                                                                        |
| TPM_PT_VENDOR_STRING_3    | NULL                                                                                                                                                                                                                                                                                                         |
| TPM_PT_VENDOR_STRING_4    | NULL                                                                                                                                                                                                                                                                                                         |
| TPM_PT_FIRMWARE_VERSION_1 | Major and minor version (for instance, 0x00070055 indicates V7.85)                                                                                                                                                                                                                                           |
| TPM_PT_FIRMWARE_VERSION_2 | Build number and Common Criteria certification state (for instance, 0x0011CB00 or 0x0011CB02)<br>Byte 1: reserved for future use (0x00)<br>Byte 2 and 3: Build number (for instance, 0x11CB)<br>Byte 4: Common Criteria certification state, 0x00 means TPM is CC certified, 0x02 means TPM is not certified |
| TPM_PT_MODES              | Bit 0 (FIPS_140_2) = 1<br>Bits 1..31 = 0                                                                                                                                                                                                                                                                     |

Reading these properties returns the current version and state of the firmware. This implies that the values read back might differ from the ones shown in **Table 5** above.

## Electrical Characteristics

### 5 Electrical Characteristics

This chapter lists the maximum and operating ranges for various electrical and timing parameters.

#### 5.1 Absolute Maximum Ratings

**Table 6 Absolute Maximum Ratings**

| Parameter                             | Symbol        | Values |      |              | Unit | Note or Test Condition                                   |
|---------------------------------------|---------------|--------|------|--------------|------|----------------------------------------------------------|
|                                       |               | Min.   | Typ. | Max.         |      |                                                          |
| Supply Voltage                        | $V_{DD}$      | -0.3   | –    | 5.0          | V    | –                                                        |
| Voltage on any pin                    | $V_{max}$     | -0.3   | –    | $V_{DD}+0.3$ | V    | –                                                        |
|                                       |               | -0.5   | –    | $V_{DD}+0.5$ | V    | $V_{DD} = 3.3V \pm 10\%$ ; pins MISO, MOSI, SCLK and CS# |
| Ambient temperature                   | $T_A$         | -40    | –    | 105          | °C   | –                                                        |
| Storage temperature                   | $T_S$         | -40    | –    | 125          | °C   | –                                                        |
| ESD robustness HBM:<br>1.5 kΩ, 100 pF | $V_{ESD,HBM}$ | –      | –    | 2000         | V    | According to EIA/JESD22-A114-B                           |
| ESD robustness                        | $V_{ESD,CDM}$ | –      | –    | 500          | V    | According to ESD Association<br>Standard STM5.3.1 - 1999 |
| Latchup immunity                      | $I_{latch}$   |        |      | 100          | mA   | According to EIA/JESD78                                  |

**Attention:** Stresses above the max. values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the integrated circuit.

#### 5.2 Functional Operating Range

**Table 7 Functional Operating Range**

| Parameter            | Symbol   | Values |      |      | Unit | Note or Test Condition                |
|----------------------|----------|--------|------|------|------|---------------------------------------|
|                      |          | Min.   | Typ. | Max. |      |                                       |
| Supply Voltage       | $V_{DD}$ | 3.0    | 3.3  | 3.6  | V    | –                                     |
|                      |          | 1.65   | 1.8  | 1.95 | V    | –                                     |
| Ambient temperature  | $T_A$    | -40    | –    | 105  | °C   | –                                     |
| Junction temperature | $T_J$    | –      | –    | 110  | °C   | see <a href="#">Section 5.3</a> below |
| Useful lifetime      |          | –      | –    | 20   | y    | –                                     |

## Electrical Characteristics

### 5.3 Thermal Resistance

**Table 8 Thermal Resistance**

| Parameter           | Symbol       | Values |      |      | Unit | Note or Test Condition                |
|---------------------|--------------|--------|------|------|------|---------------------------------------|
|                     |              | Min.   | Typ. | Max. |      |                                       |
| Junction to case    | $R_{th(JC)}$ |        | 35   |      | K/W  | to exposed pad (bottom) <sup>1)</sup> |
| Junction to ambient | $R_{th(JA)}$ |        | 179  |      | K/W  | 1) 2)                                 |

1) not subject to production test, specified by design

2) according to JEDEC JESD 51-5, JESD 51-7 at free convection and radiation on FR4 2s2p board. Board size 76.2mm x 114.3mm x 1.5mm, 2 inner copper layers (35μm), thermal via array under the exposed pad connected to the first inner copper layer. Also refer to <http://www.infineon.com/cms/en/product/technology/packages/PG-VQFN>

As shown in **Table 7**, a maximum junction temperature of **110°C** must not be exceeded. Thermal simulations (done using the FEM software ANSYS®) show that this temperature limit is not reached at an ambient temperature of 105°C when the device is mounted on a PCB according to JEDEC 2s2p (JESD 51-7, JESD 51-5).

If the device is mounted on a PCB compliant to JEDEC 1s0p (JESD 51-3), the simulation shows that due to self-heating of the device, the maximum junction temperature is exceeded at an ambient temperature of 105°C.

### 5.4 DC Characteristics

$T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3\text{V} \pm 0.3\text{V}$  or  $V_{DD} = 1.8\text{V} \pm 0.15\text{V}$  unless otherwise noted.

**Table 9 Current Consumption**

| Parameter                          | Symbol            | Values |      |      | Unit | Note or Test Condition                                                                                          |
|------------------------------------|-------------------|--------|------|------|------|-----------------------------------------------------------------------------------------------------------------|
|                                    |                   | Min.   | Typ. | Max. |      |                                                                                                                 |
| Current Consumption in Active Mode | $I_{VDD\_Active}$ |        |      | 25   | mA   | –                                                                                                               |
| Current Consumption in Sleep Mode  | $I_{VDD\_Sleep}$  |        | 110  |      | μA   | Pin PP = GND, pins GPIO, RST# and PIRQ# = $V_{DD}$ , CS# inactive (= $V_{DD}$ ), MOSI, MISO and SCLK don't care |

*Note:* Current consumption does not include any currents flowing through resistive loads on output pins!

*Note:* Device sleep mode will be entered after 50 milliseconds of inactivity after the last TPM command was executed.

**Table 10 DC Characteristics of SPI Interface Pins (SCLK, CS#, MISO, MOSI, RST#, PIRQ#)**

| Parameter          | Symbol   | Values       |      |              | Unit | Note or Test Condition                                          |
|--------------------|----------|--------------|------|--------------|------|-----------------------------------------------------------------|
|                    |          | Min.         | Typ. | Max.         |      |                                                                 |
| Input voltage high | $V_{IH}$ | $0.7 V_{DD}$ |      | $V_{DD}+0.5$ | V    | $V_{DD,typ} = 3.3\text{V}$ , only pins SCLK, MISO, MOSI and CS# |
|                    |          | $0.7 V_{DD}$ |      | $V_{DD}+0.3$ | V    | $V_{DD,typ} = 3.3\text{V}$ , pin RST#                           |
|                    |          | $0.7 V_{DD}$ |      | $V_{DD}+0.3$ | V    | $V_{DD,typ} = 1.8\text{V}$                                      |

**Electrical Characteristics**

**Table 10 DC Characteristics of SPI Interface Pins (SCLK, CS#, MISO, MOSI, RST#, PIRQ#) (continued)**

| Parameter               | Symbol     | Values       |      |              | Unit    | Note or Test Condition                                                                |
|-------------------------|------------|--------------|------|--------------|---------|---------------------------------------------------------------------------------------|
|                         |            | Min.         | Typ. | Max.         |         |                                                                                       |
| Input voltage low       | $V_{IL}$   | -0.5         |      | $0.3 V_{DD}$ | V       | $V_{DD,typ} = 3.3V$ , only pins SCLK, MISO, MOSI and CS#                              |
|                         |            | -0.3         |      | $0.3 V_{DD}$ | V       | $V_{DD,typ} = 3.3V$ , pin RST#                                                        |
|                         |            | -0.3         |      | $0.3 V_{DD}$ | V       | $V_{DD,typ} = 1.8V$                                                                   |
| Input leakage current   | $I_{LEAK}$ | -20          |      | 20           | $\mu A$ | $0V < V_{IN} < V_{DD}$                                                                |
|                         |            | -150         |      | 150          | $\mu A$ | Pins SCLK, CS#, MISO, MOSI<br>$-0.5V < V_{IN} < V_{DD} + 0.5V$<br>$V_{DD,typ} = 3.3V$ |
|                         |            | -150         |      | 150          | $\mu A$ | Pin RST#<br>$-0.5V < V_{IN} < V_{DD} + 0.3V$<br>$V_{DD,typ} = 3.3V$                   |
|                         |            | -150         |      | 150          | $\mu A$ | $-0.3V < V_{IN} < V_{DD} + 0.3V$<br>$V_{DD,typ} = 1.8V$                               |
| Output high voltage     | $V_{OH}$   | $0.9 V_{DD}$ |      |              | V       | $I_{OH} = -100\mu A$                                                                  |
| Output low voltage      | $V_{OL}$   |              |      | $0.1 V_{DD}$ | V       | $I_{OL} = 1.5mA$                                                                      |
| Pad input capacitance   | $C_{IN}$   |              |      | 10           | pF      | –                                                                                     |
| Output load capacitance | $C_{LOAD}$ |              |      | 40           | pF      | –                                                                                     |

**Table 11 DC Characteristics of GPIO and PP Pins**

| Parameter             | Symbol     | Values       |      |                | Unit    | Note or Test Condition           |
|-----------------------|------------|--------------|------|----------------|---------|----------------------------------|
|                       |            | Min.         | Typ. | Max.           |         |                                  |
| Input voltage high    | $V_{IH}$   | $0.7 V_{DD}$ |      | $V_{DD} + 0.3$ | V       | Pins GPIO and PP                 |
| Input voltage low     | $V_{IL}$   | -0.3         |      | $0.2 V_{DD}$   | V       | Pins GPIO and PP                 |
| Input leakage current | $I_{LEAK}$ | -20          |      | 20             | $\mu A$ | $0V < V_{IN} < V_{DD}$           |
|                       |            | -150         |      | 150            | $\mu A$ | $-0.3V < V_{IN} < V_{DD} + 0.3V$ |
| Output high voltage   | $V_{OH}$   | $0.7 V_{DD}$ |      |                | V       | $I_{OH} = -1mA$ , pin GPIO       |
| Output low voltage    | $V_{OL}$   |              |      | 0.3            | V       | $I_{OL} < 1mA$ , pin GPIO        |
| Pad input capacitance | $C_{IN}$   |              |      | 10             | pF      | Pins GPIO and PP                 |


## 5.5 AC Characteristics

$T_A = 25^\circ C$ ,  $V_{DD} = 3.3V \pm 0.3V$  or  $V_{DD} = 1.8V \pm 0.15V$  unless otherwise noted.

**Table 12 Device Reset**

| Parameter             | Symbol      | Values |      |      | Unit    | Note or Test Condition          |
|-----------------------|-------------|--------|------|------|---------|---------------------------------|
|                       |             | Min.   | Typ. | Max. |         |                                 |
| Cold (Power-On) Reset | $t_{POR}$   | 80     |      |      | $\mu s$ | see <a href="#">Section 5.6</a> |
| Warm Reset            | $t_{WRST}$  | 2      |      |      | $\mu s$ | see <a href="#">Section 5.6</a> |
| Reset Inactive Time   | $t_{RSTIN}$ | 60     |      |      | ms      | see <a href="#">Section 5.6</a> |

## Electrical Characteristics

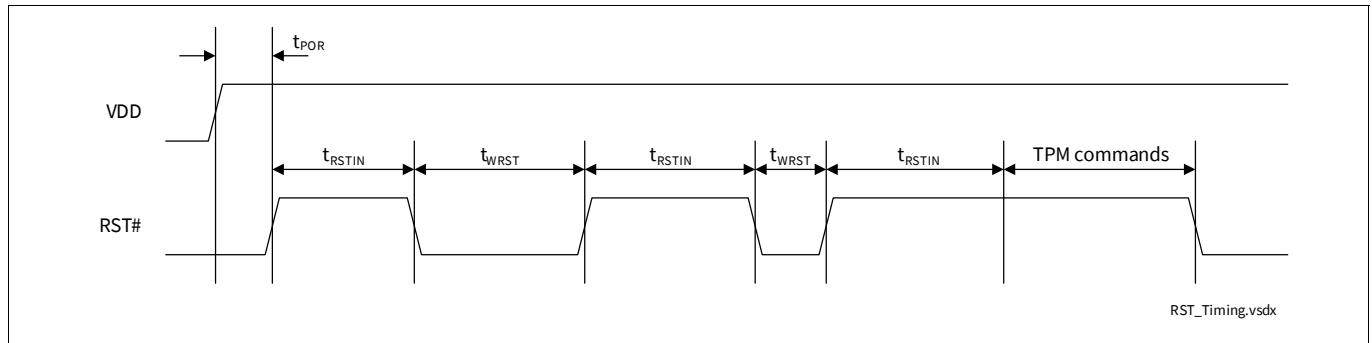

**Figure 4 RST# Timing**

**Table 13 AC Characteristics of SPI Interface**

| Parameter                       | Symbol     | Values            |             |                   | Unit    | Note or Test Condition                                                                            |
|---------------------------------|------------|-------------------|-------------|-------------------|---------|---------------------------------------------------------------------------------------------------|
|                                 |            | Min.              | Typ.        | Max.              |         |                                                                                                   |
| SCLK frequency                  | $f_{CLK}$  |                   |             | 43                | MHz     | $V_{DD,typ} = 3.3V$ , $t_{SLEW} \geq 1V/ns$                                                       |
|                                 |            |                   |             | 22.5              | MHz     | $V_{DD,typ} = 1.8V$ , $t_{SLEW} \geq 1V/ns$                                                       |
|                                 |            |                   |             | 38                | MHz     | $V_{DD,typ} = 3.3V$ , $t_{SLEW} < 1V/ns$                                                          |
|                                 |            |                   |             | 18.5              | MHz     | $V_{DD,typ} = 1.8V$ , $t_{SLEW} < 1V/ns$                                                          |
| SCLK period                     | $t_{CLK}$  | $1/f_{CLK} - 5\%$ | $1/f_{CLK}$ | $1/f_{CLK} + 5\%$ | $\mu s$ | Rising edge to rising edge, measured at $V_{IN} = 0.5 V_{DD}$                                     |
| SCLK low time                   | $t_{CLKL}$ | $0.45 t_{CLK}$    |             |                   | $\mu s$ | Falling edge to rising edge, measured at $V_{IN} = 0.5 V_{DD}$                                    |
| SCLK high time                  | $t_{CLKH}$ | $0.45 t_{CLK}$    |             |                   | $\mu s$ | Rising edge to falling edge, measured at $V_{IN} = 0.5 V_{DD}$                                    |
| SCLK slew rate (rising/falling) | $t_{SLEW}$ | 0.216             |             | 4                 | V/ns    | between $0.2 V_{DD}$ and $0.6 V_{DD}$                                                             |
| CS# high time                   | $t_{CS}$   | 50                |             |                   | ns      | Rising edge to falling edge                                                                       |
|                                 |            | 60                |             |                   | ns      | $V_{DD,typ} = 1.8V$ and $t_{SLEW} < 1V/ns$ , rising edge to falling edge, TPM protocol abort only |
| CS# setup time                  | $t_{CSS}$  | 5                 |             |                   | ns      | CS# falling edge to SCLK rising edge                                                              |
|                                 |            | 7                 |             |                   | ns      | $V_{DD,typ} = 1.8V$ and $t_{SLEW} < 1V/ns$ , CS# falling edge to SCLK rising edge                 |
| CS# hold time                   | $t_{CSH}$  | 5                 |             |                   | ns      | SCLK falling edge to CS# rising edge                                                              |
| MOSI setup time                 | $t_{SU}$   | 2                 |             |                   | ns      | Data setup time to SCLK rising edge                                                               |
| MOSI hold time                  | $t_H$      | 3                 |             |                   | ns      | Data hold time from SCLK rising edge                                                              |
| MISO hold time                  | $t_{HO}$   | 0                 |             |                   | ns      | Output hold time from SCLK falling edge                                                           |

## Electrical Characteristics

**Table 13 AC Characteristics of SPI Interface** (continued)

| Parameter             | Symbol    | Values |      |                | Unit | Note or Test Condition                              |
|-----------------------|-----------|--------|------|----------------|------|-----------------------------------------------------|
|                       |           | Min.   | Typ. | Max.           |      |                                                     |
| MISO valid delay time | $t_v$     | 0      |      | $0.7 t_{CLKL}$ | ns   | Output valid delay from SCLK falling edge           |
| MISO active time      | $t_{DRV}$ | 0      |      |                | ns   | Delay from chip select assertion to driving of MISO |

## 5.6 Timing

Some pads are disabled after deassertion of the reset signal for up to 500  $\mu$ s.

The OPTIGA™ TPM SLM 9670 features a sophisticated protection mechanism against dictionary attacks on TPM-based authorization data. Basically, the device counts the number of failed authorization attempts in a counter which is located in the non-volatile memory. An attacker who has physical access to the device could try to circumvent that mechanism by resetting the device after the authorization attempt but before the updated failure counter has been written into the NVM.

Certain countermeasures have been added to the OPTIGA™ TPM SLM 9670. In certain time windows during power-on or warm boot of the device, such reset events might influence the dictionary attack counters and trigger other security mechanisms as well. In worst case, this might trigger special security defense modes from which a recovery is very complex or even not possible.


To avoid that the OPTIGA™ TPM SLM 9670 reaches such a security defense state, the RST# signal must not be asserted in certain time windows. After the deassertion of the RST# signal, the system should wait for a minimum time of  $t_{RSTIN}$  before asserting RST# again (see [Figure 4](#) and [Table 12](#)).

TPM commands should only be started after  $t_{RSTIN}$  has expired (see [Figure 4](#) again). If a TPM command is running, RST# should not be asserted; otherwise, this might also trigger some security functions. When the TPM shall be reset, the command TPM2\_Shutdown should be issued before the assertion of the RST# signal.

## Package Dimensions (VQFN)

### 6 Package Dimensions (VQFN)


All dimensions are given in millimeters (mm) unless otherwise noted. The packages are “green” and RoHS compliant.

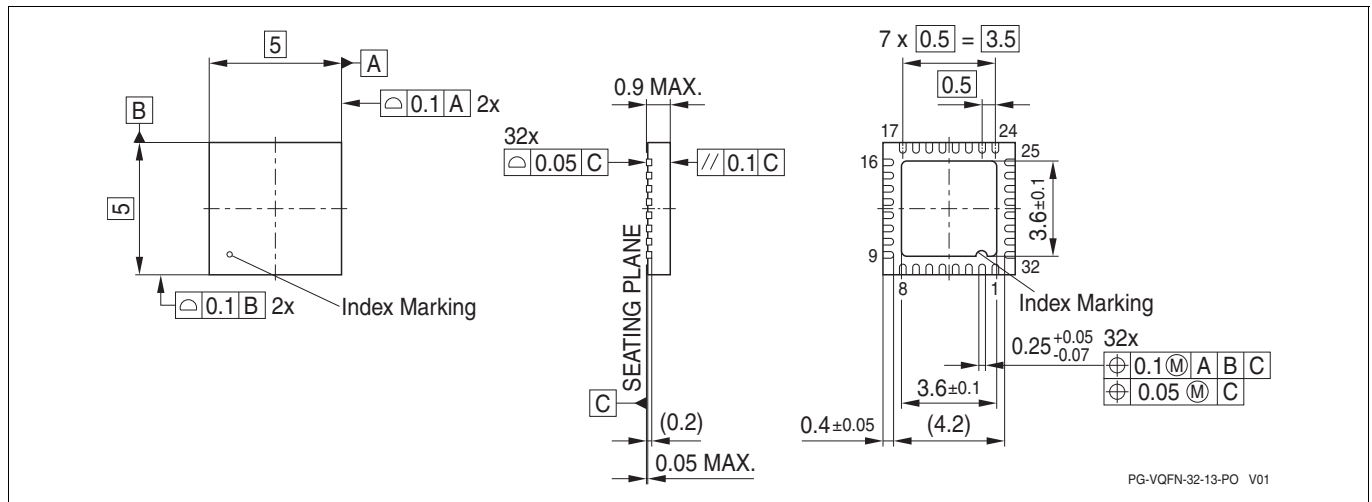

**Figure 5 Package Dimensions PG-VQFN-32-13**

#### 6.1 Packing Type


PG-VQFN-32-13: Tape & Reel (reel diameter 330mm), 5000 pcs. per reel

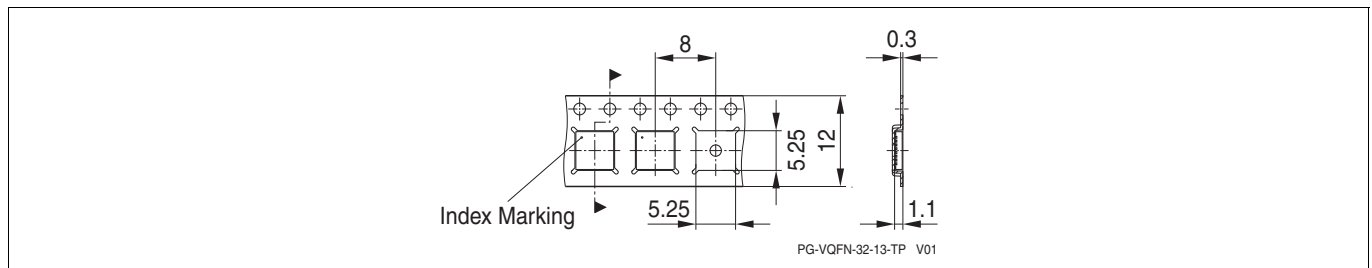

**Figure 6 Tape & Reel Dimensions PG-VQFN-32-13**

#### 6.2 Recommended Footprint

**Figure 7** shows the recommended footprint for the PG-VQFN-32-13 package. The exposed pad of the package is internally connected to GND. It shall be connected to GND externally as well.

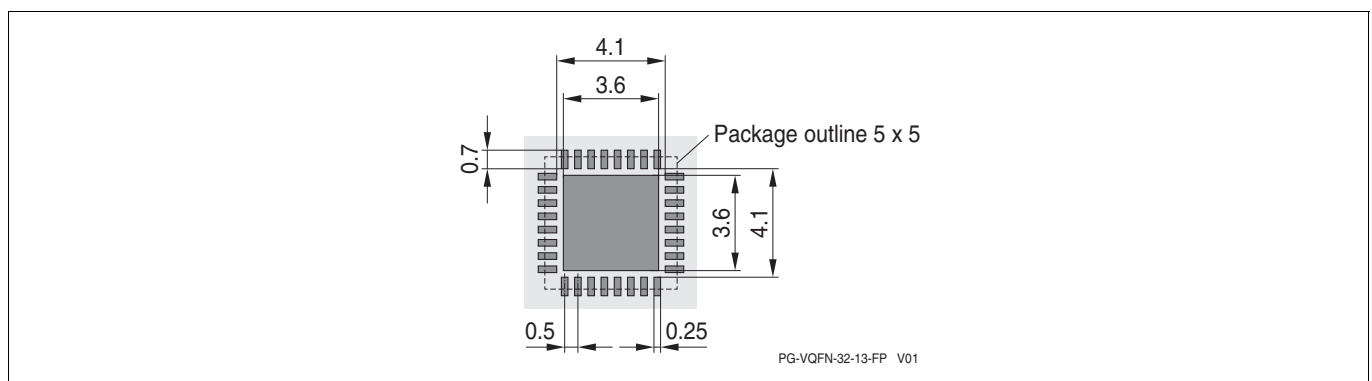

**Figure 7 Recommended Footprint PG-VQFN-32-13**


## Package Dimensions (VQFN)

### 6.3 Chip Marking

Line 1: SLM9670

Line 2: AQ20 yy, the <yy> is an internal FW indication (only at manufacturing due to field upgrade option)

Line 3: <Lot number> H <datecode>

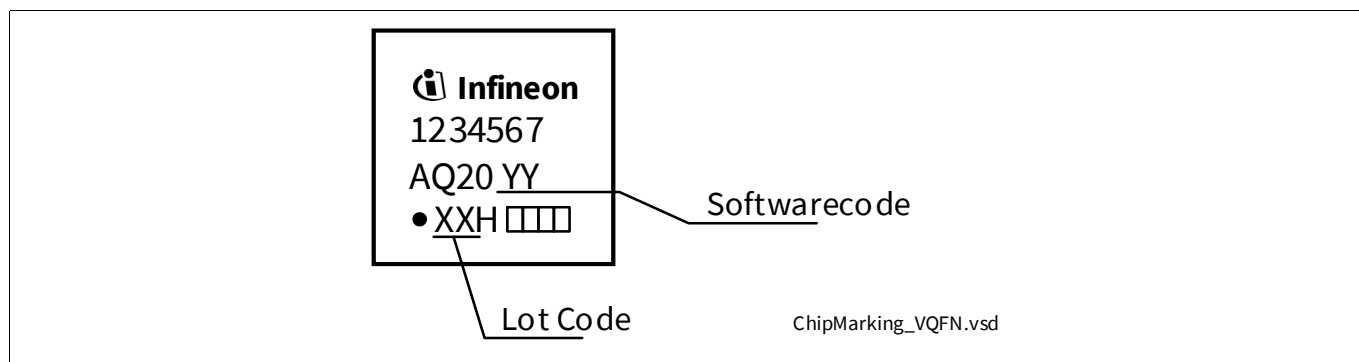

**Figure 8 Chip Marking PG-VQFN-32-13**

For details and recommendations regarding assembly of packages on PCBs, please refer to <http://www.infineon.com/cms/en/product/technology/packages/PG-VQFN>

## References

## References

- [1] —, “Trusted Platform Module Library (Part 1-4)”, Family 2.0, Level 00, Rev. 01.38, 2016-09-29, TCG
- [2] —, “TCG PC Client Platform TPM Profile (PTP) Specification”, Family 2.0, Level 00, Rev. 01.03 v22, May 22, 2017, TCG

## Terminology

### Terminology

|       |                                    |
|-------|------------------------------------|
| ESW   | Embedded Software                  |
| HMAC  | Hashed Message Authentication Code |
| PCR   | Platform Configuration Register    |
| PUBEK | Public Endorsement Key             |
| SPI   | Serial Peripheral Interface (bus)  |
| TCG   | Trusted Computing Group            |
| TPM   | Trusted Platform Module            |
| TSS   | TCG Software Stack                 |

---

## **Licenses and Notices**

The following License and Notice Statements are reproduced from [\[1\]](#).

### **Licenses and Notices**

#### **1. Copyright Licenses:**

Trusted Computing Group (TCG) grants to the user of the source code in this specification (the "Source Code") a worldwide, irrevocable, nonexclusive, royalty free, copyright license to reproduce, create derivative works, distribute, display and perform the Source Code and derivative works thereof, and to grant others the rights granted herein. The TCG grants to the user of the other parts of the specification (other than the Source Code) the rights to reproduce, distribute, display, and perform the specification solely for the purpose of developing products based on such documents.

#### **2. Source Code Distribution Conditions:**

Redistributions of Source Code must retain the above copyright licenses, this list of conditions and the following disclaimers.

Redistributions in binary form must reproduce the above copyright licenses, this list of conditions and the following disclaimers in the documentation and/or other materials provided with the distribution.

#### **3. Disclaimers:**

THE COPYRIGHT LICENSES SET FORTH ABOVE DO NOT REPRESENT ANY FORM OF LICENSE OR WAIVER, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, WITH RESPECT TO PATENT RIGHTS HELD BY TCG MEMBERS (OR OTHER THIRD PARTIES) THAT MAY BE NECESSARY TO IMPLEMENT THIS SPECIFICATION OR OTHERWISE. Contact TCG Administration ([admin@trustedcomputinggroup.org](mailto:admin@trustedcomputinggroup.org)) for information on specification licensing rights available through TCG membership agreements.

THIS SPECIFICATION IS PROVIDED "AS IS" WITH NO EXPRESS OR IMPLIED WARRANTIES WHATSOEVER, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ACCURACY, COMPLETENESS, OR NONINFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS, OR ANY WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, SPECIFICATION OR SAMPLE.

Without limitation, TCG and its members and licensors disclaim all liability, including liability for infringement of any proprietary rights, relating to use of information in this specification and to the implementation of this specification, and TCG disclaims all liability for cost of procurement of substitute goods or services, lost profits, loss of use, loss of data or any incidental, consequential, direct, indirect, or special damages, whether under contract, tort, warranty or otherwise, arising in any way out of use or reliance upon this specification or any information herein.

Any marks and brands contained herein are the property of their respective owners.

**Revision History**

**Revision History**

| Reference                       | Description                |
|---------------------------------|----------------------------|
| <b>Revision 1.1, 2024-08-01</b> |                            |
|                                 | Added certificate numbers. |
| <b>Revision 1.0, 2019-04-08</b> |                            |
|                                 | Initial revision.          |

#### Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2024-08-01**

**Published by**

**Infineon Technologies AG**

**81726 Munich, Germany**

**© 2024 Infineon Technologies AG.**

**All Rights Reserved.**

**Do you have a question about any aspect of this document?**

**Email:**

**[dsscusterservice@infineon.com](mailto:dsscusterservice@infineon.com)**

#### IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

#### WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.