


Data Sheet | Item Number: 2616-3352


PCB terminal block; lever; 16 mm²; Pin spacing 15 mm; 2-pole; Push-in CAGE CLAMP®; 16,00 mm²; gray

<https://www.wago.com/2616-3352>


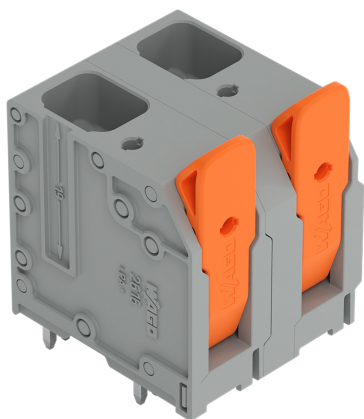


Color: ■ gray

Current-Carrying Capacity Curve
Pin spacing: 10 mm / Conductor cross-section: 16 mm² "f-st"
Based on: EN 60512-5-2 / Reduction factor: 1

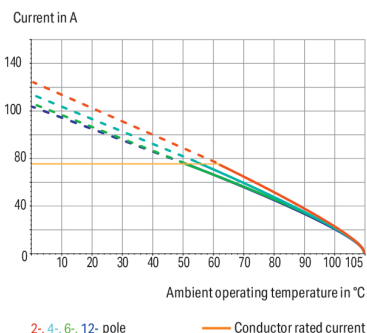

Current-carrying capacity curve
PCB terminal block (2616-3352)
Pin spacing: 15 mm / Conductor cross-section: 25 mm² "f-st"
Based on: EN 60512-5-2 / Reduction factor: 1

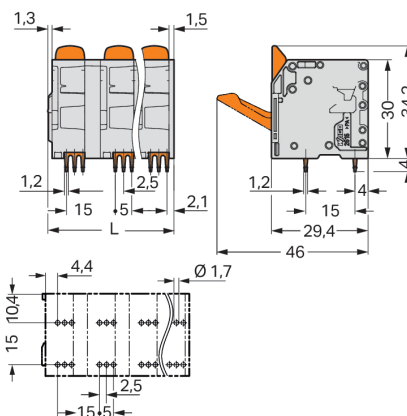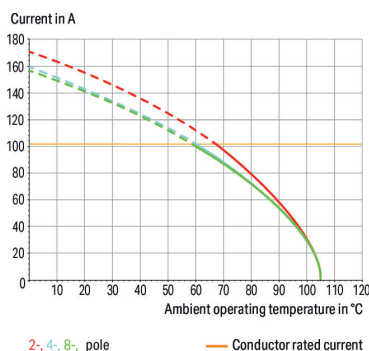

$$L = (\text{pole no.} - 1) \times \text{pin spacing} + 17.8 \text{ mm}$$

PCB terminal block, 2616 Series, solder pin dimensions 1.2 x 1.2 mm

This PCB terminal block (item number 2616-3352) is designed for quick and simple connections. It offers the flexibility needed for different mounting types. Conductors should only be connected to this PCB terminal block if their strip length is between 18 and 20 mm. Featuring one conductor terminal along with Push-in CAGE CLAMP®, this connector is highly versatile. Push-in CAGE CLAMP® connection technology is ideal for connecting all conductor types. Both solid and fine-stranded conductors with ferrules can be plugged in without the need for tools—all thanks to its pluggable design. The dimensions are (26.5 x 38.2 x 29.4) mm (width x height x depth). This PCB terminal block is suitable for conductor cross sections ranging from 0.75 mm² to 16 mm².

Tin is used for coating the contact surfaces. This PCB terminal block is operated with a lever. THT is used to assemble the PCB terminal block. Insert the conductor into the board at a 90° angle..

Notes	
Variants:	Other pole numbers Direct marking Other colors Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		800 V	1000 V	1000 V
Rated impulse withstand voltage		8 kV	8 kV	8 kV
Rated current		76 A	76 A	76 A
Approvals per		UL 1059		
Use group		B	C	D
Rated voltage		600 V	600 V	-
Rated current		78 A	78 A	-

Approvals per		CSA		
Use group		B	C	D
Rated voltage		600 V	600 V	-
Rated current		72 A	78 A	-

Connection Data	
Clamping units	2
Total number of potentials	2
Number of connection types	1
Number of levels	1

Connection 1	
Connection technology	Push-in CAGE CLAMP®
Actuation type	Lever
Solid conductor	0.75 ... 16 mm² / 18 ... 4 AWG
Fine-stranded conductor	0.75 ... 25 mm² / 18 ... 4 AWG
Fine-stranded conductor; with insulated ferule	0.75 ... 16 mm²
Fine-stranded conductor; with uninsulated ferrule	0.75 ... 16 mm²
Fine-stranded conductor; with twin ferrule	0.75 ... 6 mm²
Strip length	18 ... 20 mm / 0.71 ... 0.79 inches
Conductor connection direction to PCB	90 °
Pole number	2

Physical data	
Pin spacing	15 mm / 0.591 inches
Width	26.5 mm / 1.043 inches
Height	38.2 mm / 1.504 inches
Height from the surface	34.2 mm / 1.346 inches
Depth	29.4 mm / 1.157 inches
Solder pin length	4 mm
Solder pin dimensions	1.2 x 1.2 mm
Drilled hole diameter	1.7 (+0.1) mm



PCB contact		
PCB contact		THT
Solder pin arrangement		over the entire terminal strip (in-line)
Number of solder pins per potential		6

Material data		
Note (material data)		Information on material specifications can be found here
Color		gray
Material group		I
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact Plating		Tin
Fire load		0.277 MJ
Actuator color		orange
Weight		21.7 g

Environmental requirements																																																				
Limit temperature range	-60 ... +105 °C	<table><tr><th colspan="2">Environmental Testing</th></tr><tr><td>Test specification: Railway applications – Rolling stock – Electronic equipment</td><td>DIN EN 50155 (VDE 0115-200):2022-06</td></tr><tr><td>Test procedure: Railway applications – Rolling stock equipment – Vibration and shock tests</td><td>DIN EN 61373 (VDE 0115-0106):2011-04</td></tr><tr><td>Spectrum/Mounting location</td><td>Service life test, Category 1, Class A/B</td></tr><tr><td>Functional test with noise-like oscillations</td><td>Test passed according to Section 8 of the standard</td></tr><tr><td>Frequency</td><td>f₁ = 5 Hz to f₂ = 150 Hz</td></tr><tr><td>Acceleration</td><td>0.101g (highest test level used for all axes)</td></tr><tr><td>Test duration per axis</td><td>10 min.</td></tr><tr><td>Test directions</td><td>X, Y and Z axes</td></tr><tr><td>Monitoring of contact faults and interruptions</td><td>Passed</td></tr><tr><td>Voltage drop measurement before and after each axis</td><td>Passed</td></tr><tr><td>Simulated service life test through increased levels of noise-like oscillations</td><td>Test passed according to Section 9 of the standard</td></tr><tr><td>Frequency</td><td>f₁ = 5 Hz to f₂ = 150 Hz</td></tr><tr><td>Acceleration</td><td>0.572g (highest test level used for all axes)</td></tr><tr><td>Test duration per axis</td><td>5 h</td></tr><tr><td>Test directions</td><td>X, Y and Z axes</td></tr><tr><td>Extended testing: Monitoring of contact faults and interruptions</td><td>Passed</td></tr><tr><td>Extended testing: Voltage drop measurement before and after each axis</td><td>Passed</td></tr><tr><td>Shock test</td><td>Test passed according to Section 10 of the standard</td></tr><tr><td>Shock pulse form</td><td>Half sine</td></tr><tr><td>Acceleration</td><td>5g (highest test level used for all axes)</td></tr><tr><td>Shock duration</td><td>30 ms</td></tr><tr><td>Number of shocks (per axis)</td><td>3 pos. und 3 neg.</td></tr><tr><td>Test directions</td><td>X, Y and Z axes</td></tr><tr><td>Extended testing: Monitoring of contact faults and interruptions</td><td>Passed</td></tr></table>	Environmental Testing		Test specification: Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06	Test procedure: Railway applications – Rolling stock equipment – Vibration and shock tests	DIN EN 61373 (VDE 0115-0106):2011-04	Spectrum/Mounting location	Service life test, Category 1, Class A/B	Functional test with noise-like oscillations	Test passed according to Section 8 of the standard	Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz	Acceleration	0.101g (highest test level used for all axes)	Test duration per axis	10 min.	Test directions	X, Y and Z axes	Monitoring of contact faults and interruptions	Passed	Voltage drop measurement before and after each axis	Passed	Simulated service life test through increased levels of noise-like oscillations	Test passed according to Section 9 of the standard	Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz	Acceleration	0.572g (highest test level used for all axes)	Test duration per axis	5 h	Test directions	X, Y and Z axes	Extended testing: Monitoring of contact faults and interruptions	Passed	Extended testing: Voltage drop measurement before and after each axis	Passed	Shock test	Test passed according to Section 10 of the standard	Shock pulse form	Half sine	Acceleration	5g (highest test level used for all axes)	Shock duration	30 ms	Number of shocks (per axis)	3 pos. und 3 neg.	Test directions	X, Y and Z axes	Extended testing: Monitoring of contact faults and interruptions	Passed
Environmental Testing																																																				
Test specification: Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06																																																			
Test procedure: Railway applications – Rolling stock equipment – Vibration and shock tests	DIN EN 61373 (VDE 0115-0106):2011-04																																																			
Spectrum/Mounting location	Service life test, Category 1, Class A/B																																																			
Functional test with noise-like oscillations	Test passed according to Section 8 of the standard																																																			
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz																																																			
Acceleration	0.101g (highest test level used for all axes)																																																			
Test duration per axis	10 min.																																																			
Test directions	X, Y and Z axes																																																			
Monitoring of contact faults and interruptions	Passed																																																			
Voltage drop measurement before and after each axis	Passed																																																			
Simulated service life test through increased levels of noise-like oscillations	Test passed according to Section 9 of the standard																																																			
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz																																																			
Acceleration	0.572g (highest test level used for all axes)																																																			
Test duration per axis	5 h																																																			
Test directions	X, Y and Z axes																																																			
Extended testing: Monitoring of contact faults and interruptions	Passed																																																			
Extended testing: Voltage drop measurement before and after each axis	Passed																																																			
Shock test	Test passed according to Section 10 of the standard																																																			
Shock pulse form	Half sine																																																			
Acceleration	5g (highest test level used for all axes)																																																			
Shock duration	30 ms																																																			
Number of shocks (per axis)	3 pos. und 3 neg.																																																			
Test directions	X, Y and Z axes																																																			
Extended testing: Monitoring of contact faults and interruptions	Passed																																																			
Processing temperature	-35 ... +60 °C																																																			

Environmental Testing		
Extended testing: Voltage drop measurement before and after each axis	Passed	
Vibration and shock stress for rolling stock equipment	Passed	

Commercial data		
PU (SPU)		42 pcs
Packaging type		Box
Country of origin		PL
GTIN		4066966482812
Customs tariff number		85369010000

Product Classification		
UNSPSC		39121409
ETIM 9.0		EC002643
ETIM 10.0		EC002643
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates					
General approvals			Declarations of conformity and manufacturer's declarations		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 60947-7-4	NL-61617	Railway WAGO GmbH & Co. KG	-	Z00004414.000
CSA DEKRA Certification B.V.	C22.2	70154737			
DEKRA DEKRA Certification B.V.	EN 60947-7-4	71-148282			
KEMA/KEUR DEKRA Certification B.V.	EN 60947-7-4	71-110774			
UL Underwriters Laboratories Inc.	C22.2 No. 158	UL-US- L45172-6187173-60217102-1			



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 2616-3352			

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data


CAD data	
2D/3D Models 2616-3352	

CAE data	
ZUKEN Portal 2616-3352	

PCB Design	
Symbol and Footprint via SamacSys 2616-3352	
Symbol and Footprint via Ultra Librarian 2616-3352	


Installation Notes

Conductor termination



Insert fine-stranded conductors – and remove all conductors – via operating tool.

Conductor termination



Insert solid conductors via push-in termination.

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com