
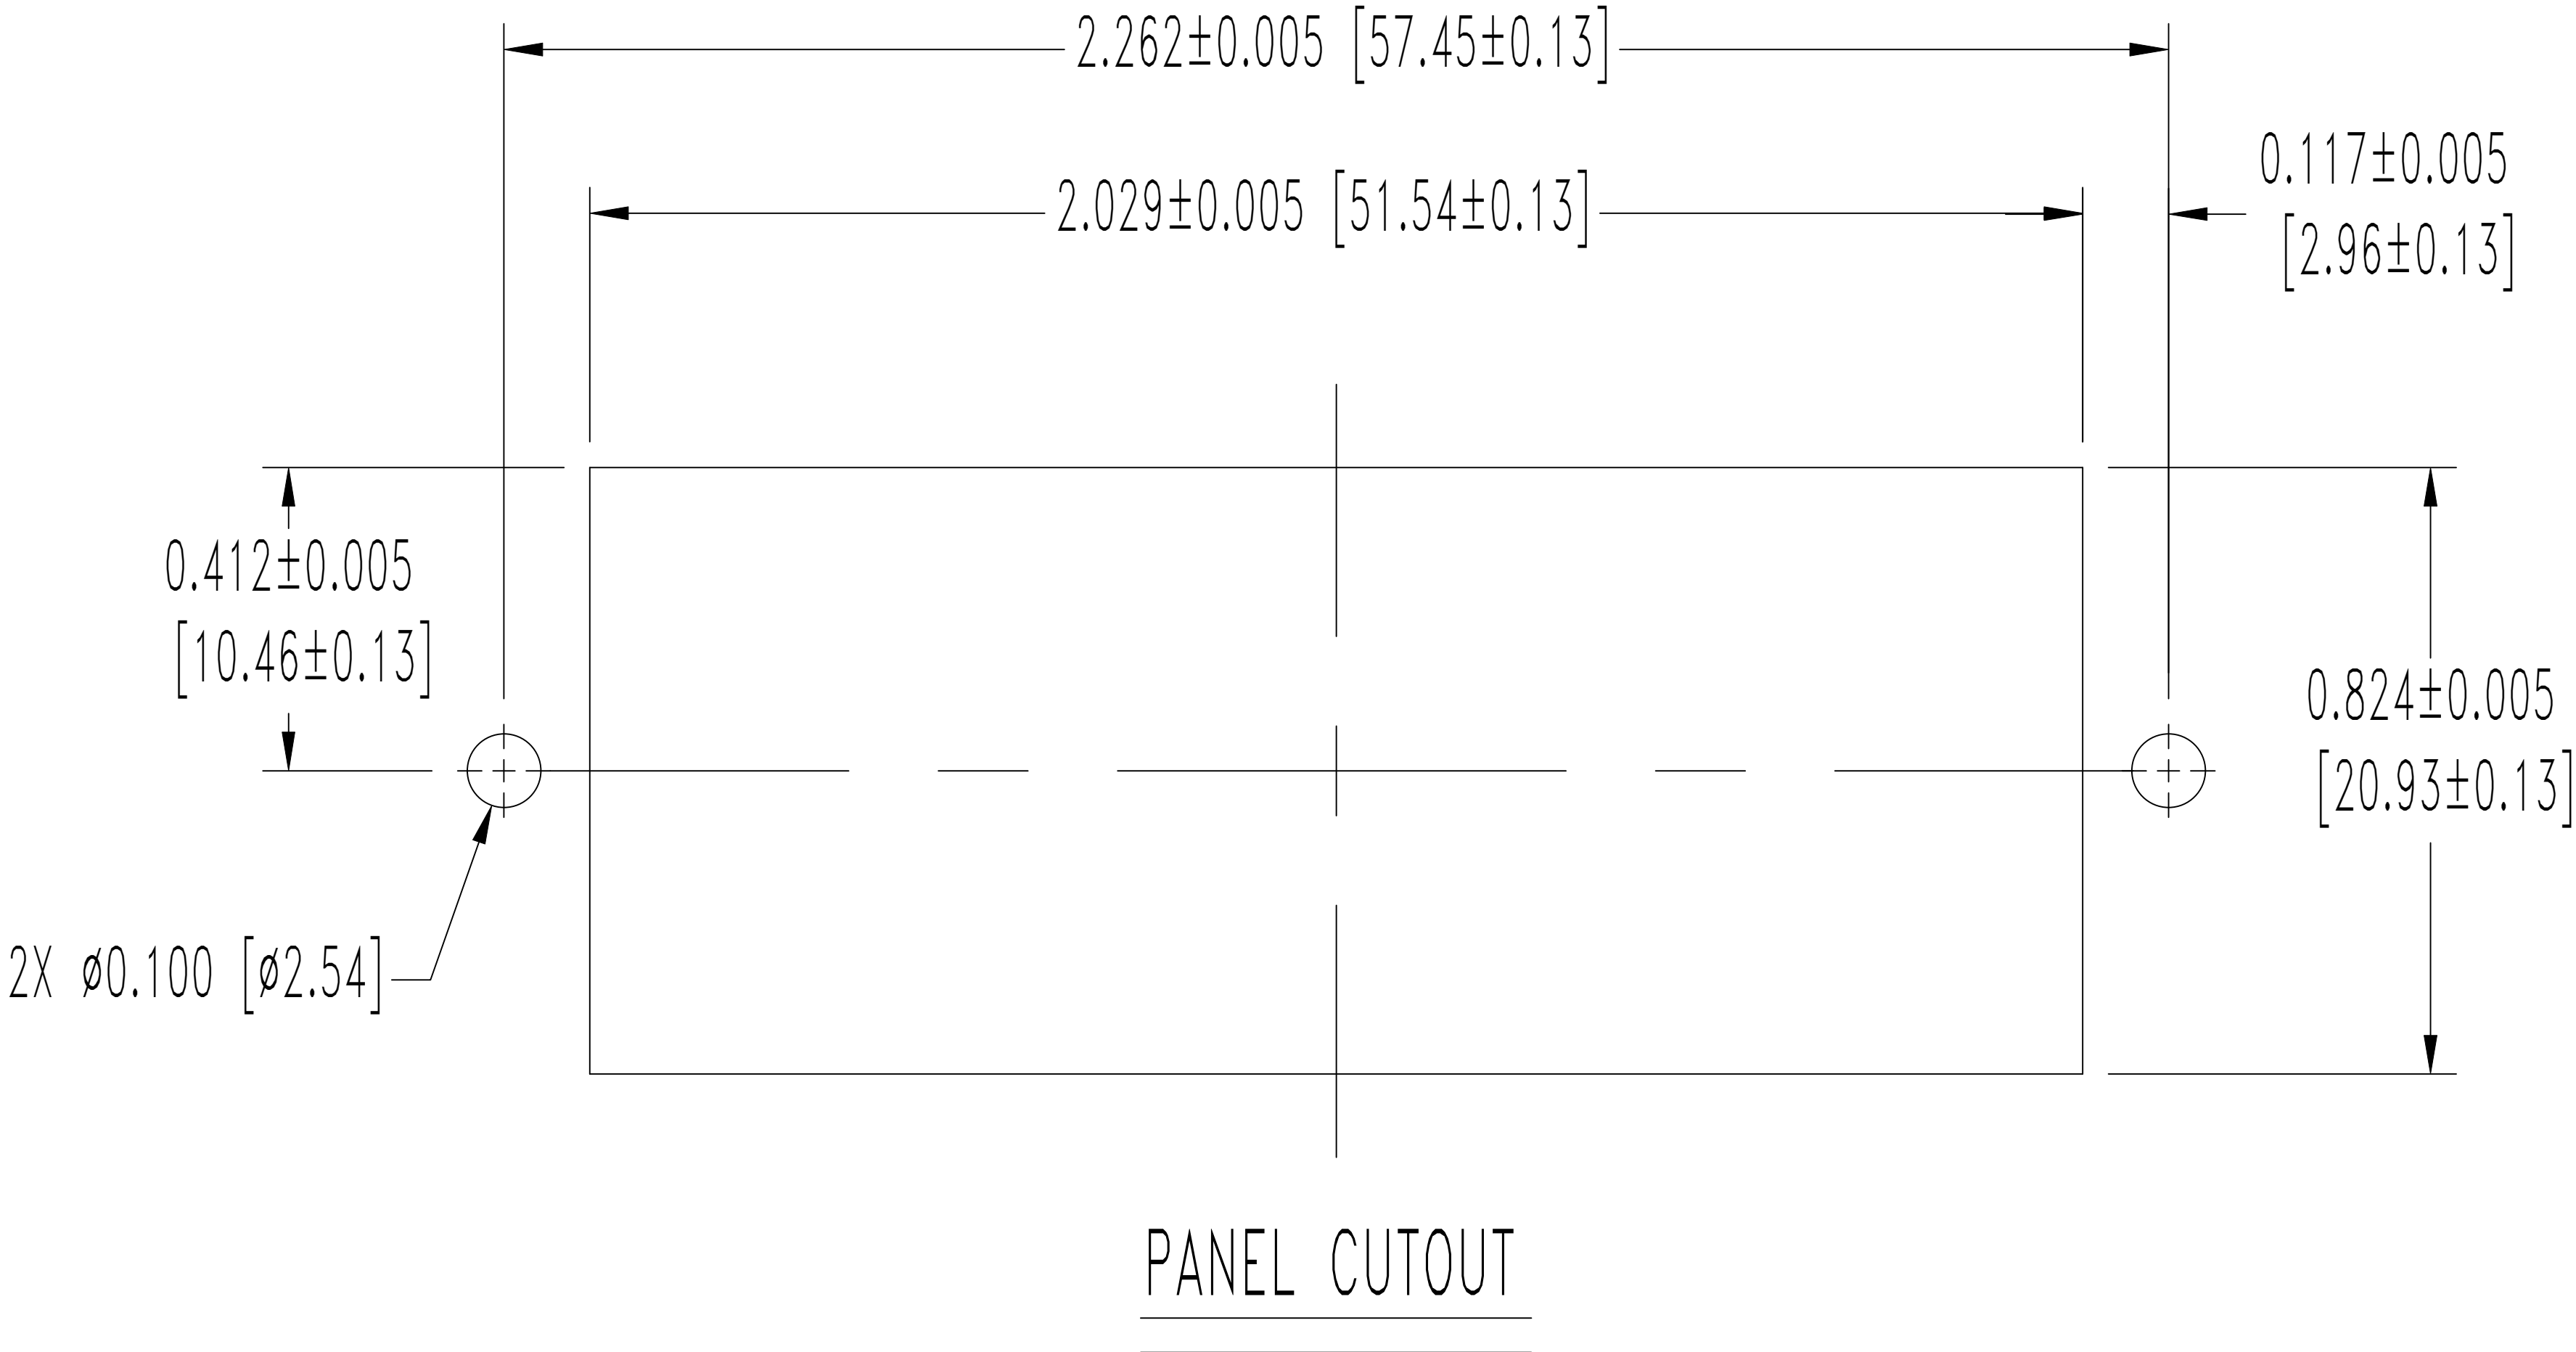
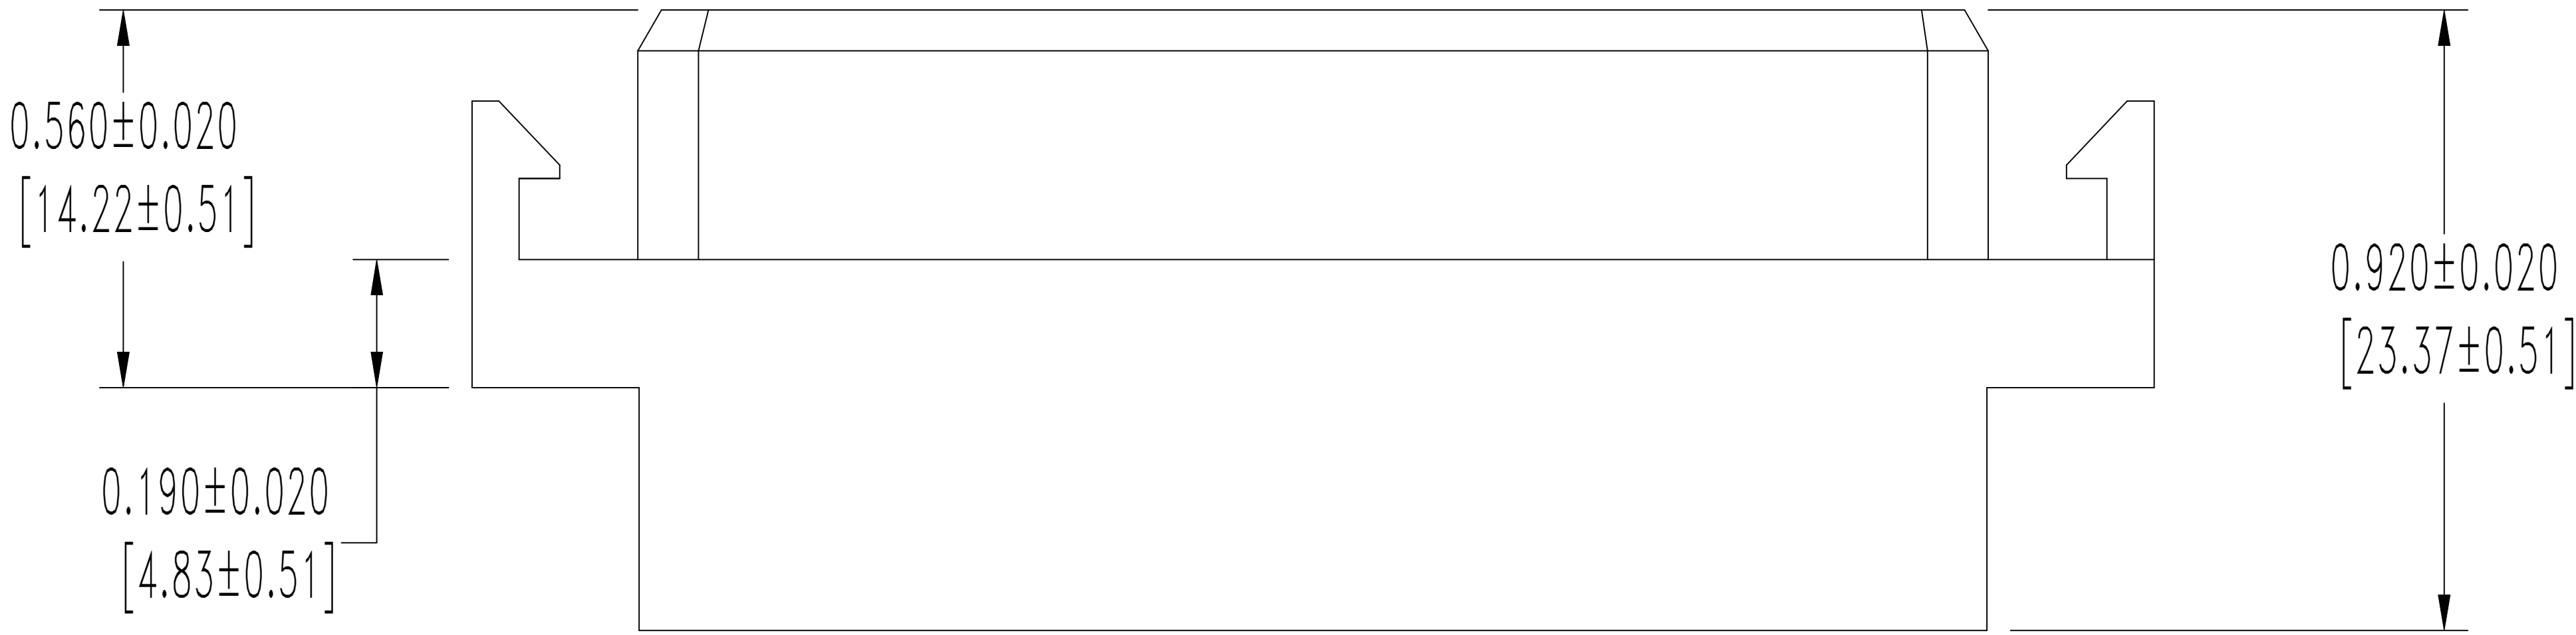
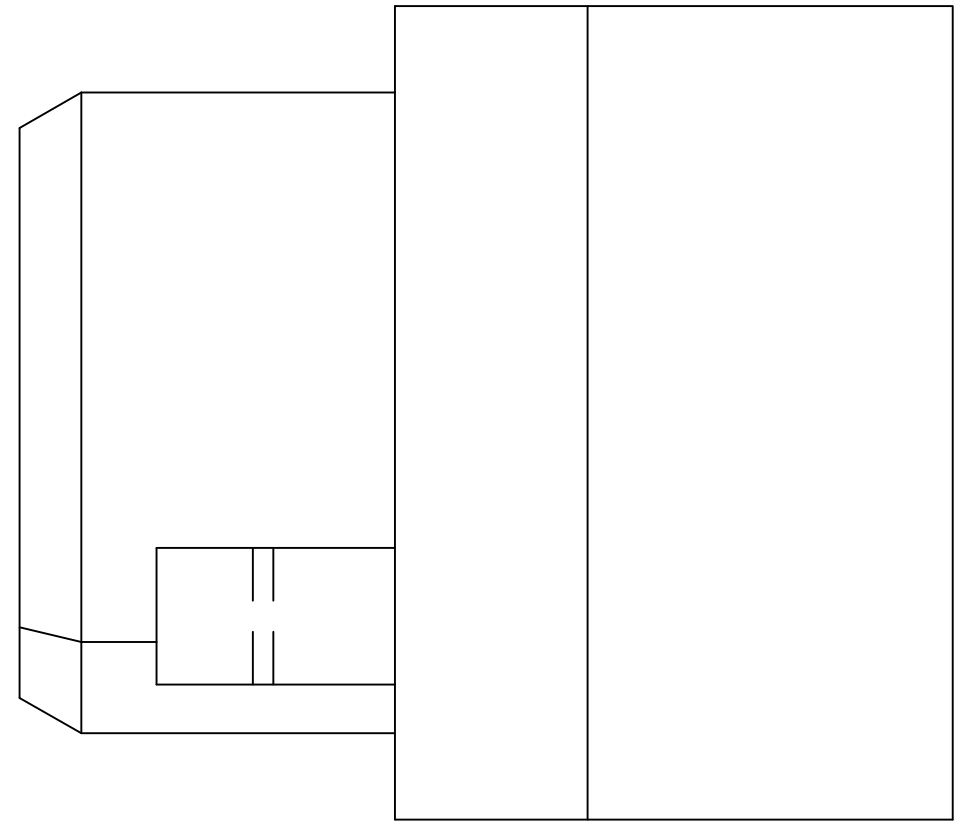



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD		APP	DR	CK
10-5-01	NC	ECO	18388	RCW	ME	COLE
4-15-04	A	ECO	22042	RCW	YK	TK
6-7-04	B	ECO	22508		YK	

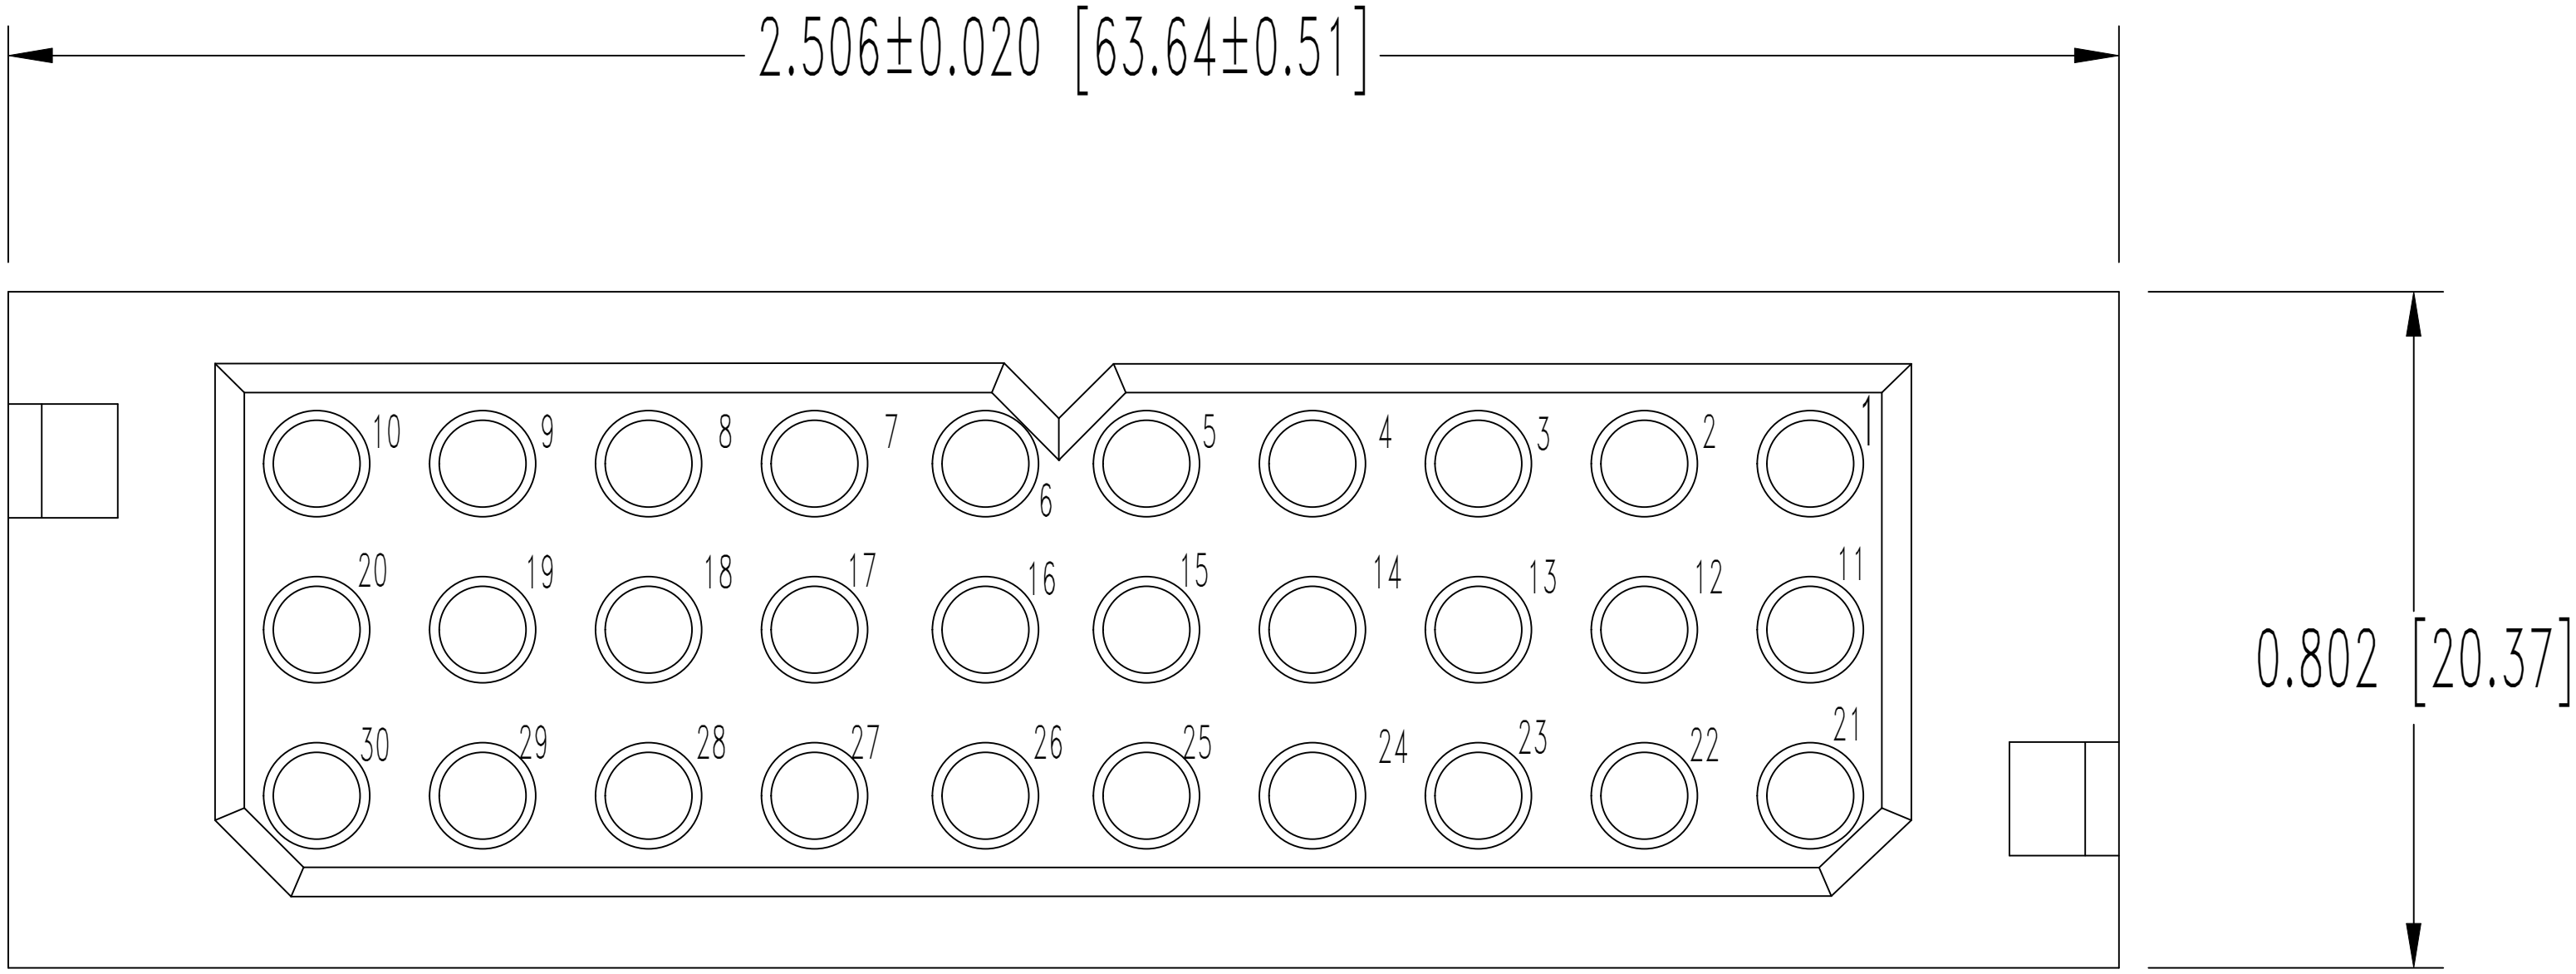


NOTES:

- MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
- ELECTRICAL CHARACTERISTICS:
INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
WORKING VOLTAGE: 600 VAC.
- WORKING TEMPERATURE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

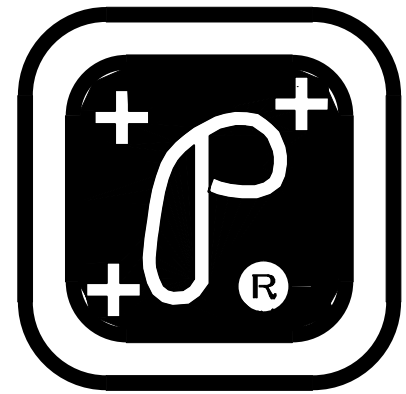

POSITRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

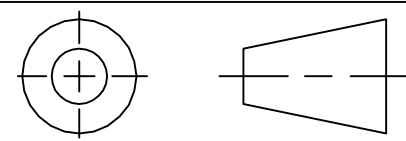

DECIMAL TOL.
± 0.015 [0.38]

ANGULAR TOL.
± 5°

PCS SERIES

TITLE

DATE
10-5-01

SCALE
N.T.S.

PLC30F1000

DRAWING NUMBER
SK3958

DRAWN BY
M. ENEA

APPROVED BY
RCW

REV.
B