MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS

FED. MFR. CODE 91929

SWITCH—BASIC

CATALOG LISTING
2SE157-3

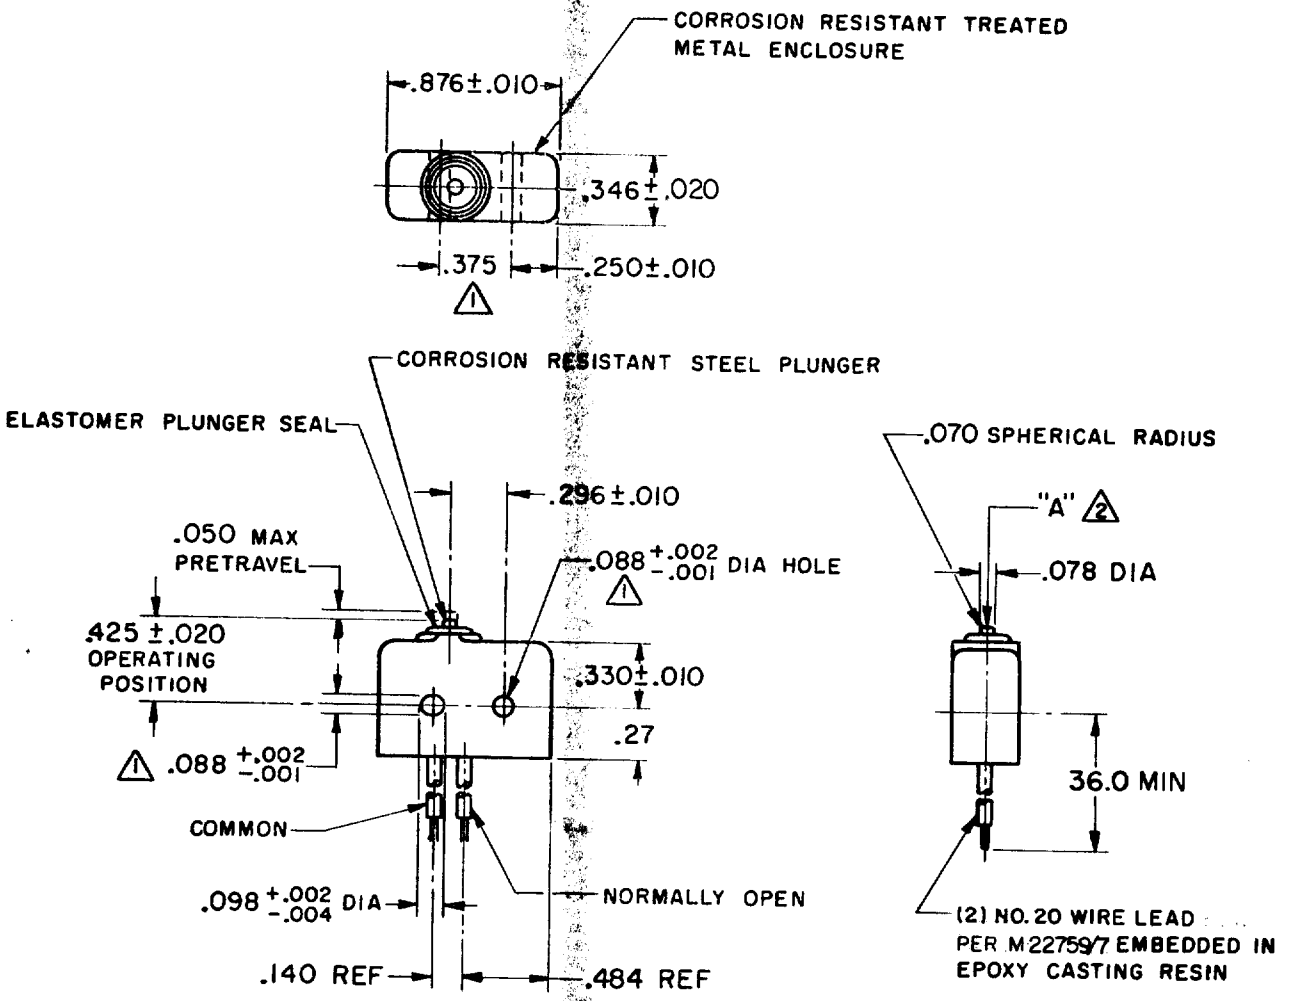

NOTE –
1 – MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .375 ±.002 CENTERS
2 – ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
3 – WEIGHT OF SWITCH ONLY IS .26 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS 1.20 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	5-17 OZ
RELEASE FORCE	4 OZ MIN
RELEASE TRAVEL	.004 MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.003 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

250 VAC		5 AMP
30 VOLTS DC RATING		
INDUCTIVE	SEA LEVEL	3 AMP
	50,000 FT	2.5 AMP
RESISTIVE	SEA LEVEL	5 AMP
	50,000 FT	5 AMP
MAXIMUM INRUSH		24 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT 3

M	2SE157-3	DRAWING NUMBER
X		ISSUE
4		
SR11486		RELEASE NO.
		REPLACES

REVISIONS

A	CO-34213	J A L 25 SEPT 74
B	C O 44646	T M M 2 DEC 78
C	CO57041A	CJH 21 MAR 85

DRAWN	HBW	19 FEB 64
CHECK	DAW	21 FEB 64
CHECK	EB	21 FEB 64
CHECK		

-50378

Downloaded from Arrow.com.