


HE3600

Miniature Single In-line Reed Relay

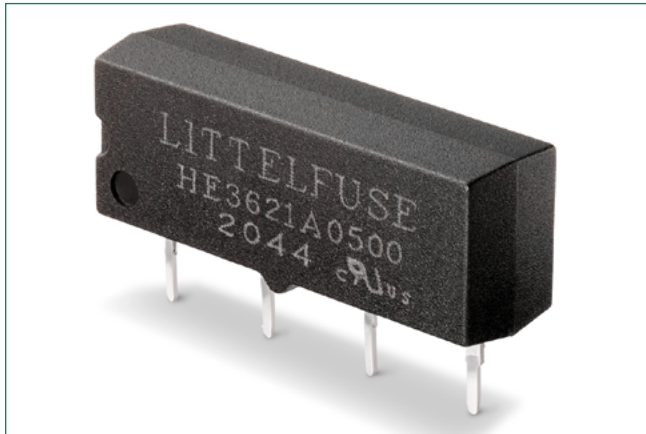

Agency Approvals


Agency	Agency File Number
UL	E47258

Note: Not all parts are UL Recognized. Contact Littelfuse for specific parts and agency approval ratings.

Dimensions

Dimensions in mm (inch)

Relay Type	Body Type	L	W	H
HE3600	Transfer Molded	19.05 (.750)	5.08 (.200)	7.45 (.293)
	External Shield	19.70 (.776)	5.65 (.222)	7.87 (.310)

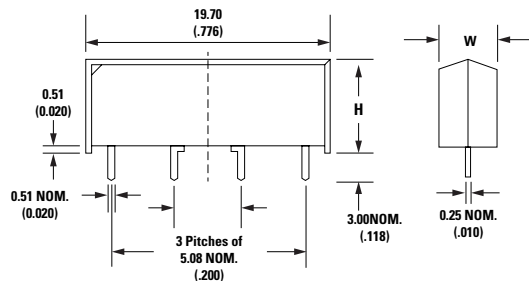

Description

The HE3600 is a miniature reed relay in a SIL package with a normally open contacts capable of switching up to 200Vdc at 10W. It is available with 5V, 12V, and 24V coils and has external magnetic shield and diode suppressed coil options.

Features & Benefits

- Sub-miniature size and single in line configuration allows very high packing densities, minimizing space and cost
- Transfer molded package gives maximum component protection
- Lower power coil consumption than competing electromechanical devices
- Hermetically sealed switching contact is immune to the effects of its environment
- Miniature single in-line package
- Optional coil suppression diode to protect coil drive circuits
- Normally open contact version
- RoHS Compliant
- External magnetic shield option
- Diode suppression option
- UL Recognized to UL 508 as an Industrial Control Switch

Applications

- Security Systems
- Telecom Equipment
- Process Control Systems
- Automatic Test Equipment
- Instrumentation


HE3600**Miniature Single In-line Reed Relay****Table 2**
Electrical and Operating Characteristics @ 25°C

Characteristics			Contact Type	
			Form A SPST-NO Standard	
			Relay Type	
			HE3621A	
Contact Rating ¹	Power, Switching	Watt - Max.	10	
	Voltage, Switching ²	Vdc - Max.	200	
		Vac - Max.	140	
	Current, Switching ³	Adc - Max.	0.5	
Aac - Max.		0.35		
Voltage Hold-off ⁴	Current, Carry	Adc - Max.	1.2	
	Across Open Contacts	Vdc - Min.	250	
		Contacts to Coil	Vac - Min.	1500
		Between Isolated Terminals	Vac - Min.	1500
Resistance	Contact, Initial	Ω Max.	0.150	
	Insulation Across Open Contacts	Ω Min.	10 ¹⁰	
	Insulation Between Isolated Terminals	Ω Min.	10 ¹⁰	
Timing	Operate Time	ms - Max.	1.0	
	Release Time	ms - Max.	1.0	
Environmental	Temperature, Operating	°C	-40 to +85	
	Temperature, Storage ⁵	°C	-40 to +105	
	Vibration Resistance	G - Max. 10-2000 Hz.	20	
	Shock Resistance	G - Max. 11 ms ½ sine	50	

Notes:

1. Contact rating - Product of the switching voltage and current should never exceed the wattage rating. Contact Littelfuse for additional load/lofe information.
2. When switching inductive and/or capacitive loads, the effects of transient voltages and/or currents should be considered. Refer to Application Notes AN108A & AN107 for details.
3. Electrical Load Life Expectancy - Contact Littelfuse with voltage current values along with type of load.
4. Breakdown Voltage - Per MIL-STD-202, Method 301.
5. Storage Temperature - Long time exposure at elevated temperature may degrade solderability of the leads.


Table 3
Coil Characteristics @ 25°C

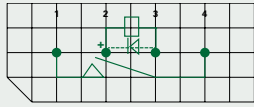Contact Form & Type	Electrical & Operating Characteristics	Dimensions	Part Number	Nominal Coil Voltage Vdc	Coil Resistance ±10% Ohms	Must Operate Vdc	Must Release Vdc	Maximum Coil Voltage Vdc	Top View 2.54mm (0.1") Grid Dot on Case: Pin 1 Numbers not printed on case.
1A SPST-NO	See Table 2	See Table 1	HE3621A0500	5	500	3.75	0.5	14	
			HE3621A1200	12	1000	8.0	1.0	22	
			HE3621A2400	24	2150	16.0	2.0	31	


HE3600

Miniature Single In-line Reed Relay

HE3600 PCB Layout
(Bottom View)

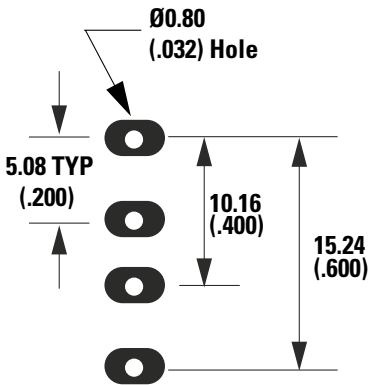

Part Numbering System

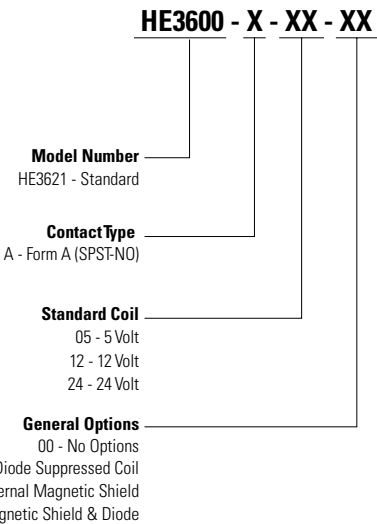

Note: Not all combinations of Part Number suffixes are available. Contact Littelfuse for details.

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	Taping Width
Bulk	Bulk	5367/5600	N/A	N/A