


NOTES:

1. FOR USE WITH BOEING BMS13-65 OG & ADAMS RUSSELL FC20Z CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-546-2.
3. FOR CRIMPING USE DIE KTH-2231.
4. INTERFACE PER MIL-STD-348, FIG. 304-1.
5. CENTER CONTACT (1-547-32MA9) SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: KINGS 1205-62-9
XXXX (DATE CODE)
7. MATERIALS:
INSULATOR-TEFLON, ASTM-D-1710
OUTER CONTACT-BER. COP., ASTM-B196
K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B135
GASKET-SILICONE RUBBER, A-A-59588
C-RING-PHOS. BRONZE, ASTM-B103
ALL OTHER METAL PARTS-BRASS, ASTM-B16
8. FINISHES:
CENTER CONTACTS: .000050 MIN GOLD PER ASTM B488 OVER .000050 MIN NICKEL PER AMS-QQ-N-290(RoHS)
OUTER CONTACT: .000200 MIN SILVER PER ASTM B700 OVER .000020 MIN. COPPER PER ASTM B734(RoHS)
ALL OTHER METAL PARTS: .000050 MIN NICKEL PLATE PER AMS-QQ-N-290 OVER .000050 MIN COPPER PER ASTM B734(RoHS)
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
FREQUENCY RANGE-DC TO 11 GHZ
WORKING VOLTAGE-1000 VRMS
10. WEIGHT-37.7 GRAMS(.083 POUNDS)

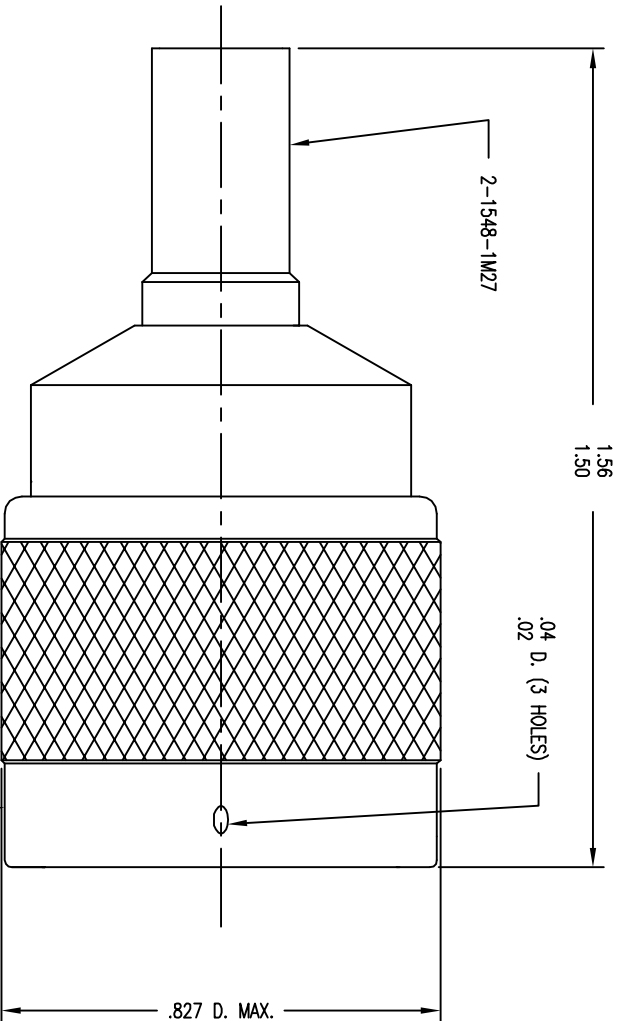

1205-62-9

REVISIONS		
ISSUE	CHANGES	
0	ER 35823	KH 09/21/94
B	ER 34269	COL 09/02/11

SALES DRAWING		
THIS DRAWING, THE DESIGN AND IDEAS ENCLOSED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.		
SCALE 4:1		
APPROX SURFACE AREA		
USED ON		
CAGE CODE:91836		
PLUG, N		
DRAWN	KH	DATE 03/15/94
DESIGN	JT	DATE 03/16/94
APPR.		DATE
by WINCHESTER ELECTRONICS		
Winchester Electronics 62 Barnes Industrial Road North Middletown, CT 06442		B SIZE
1205-62-9		