
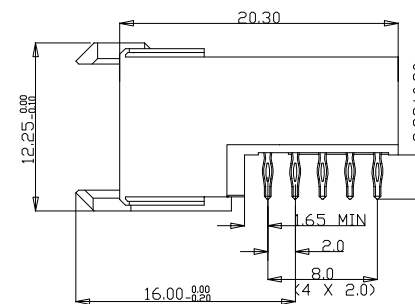
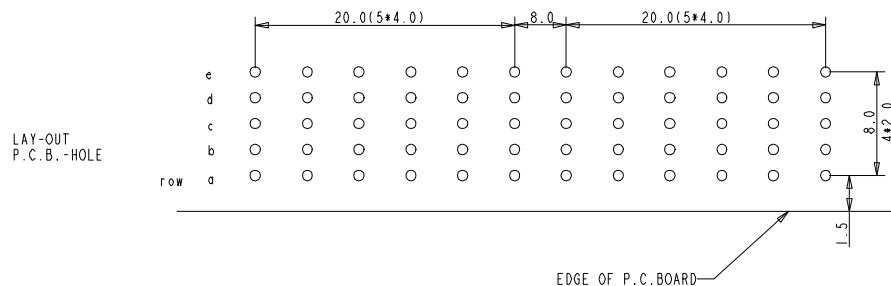
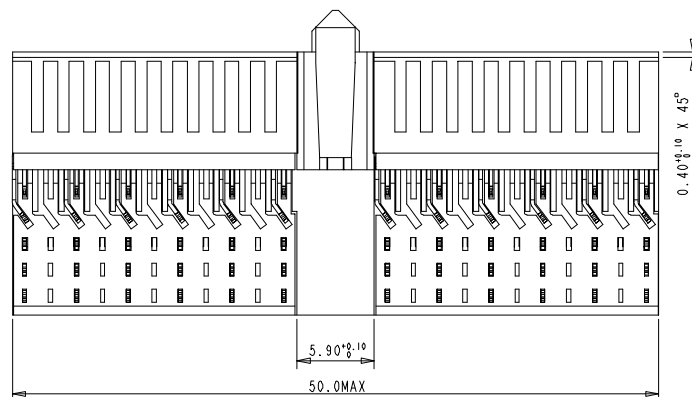


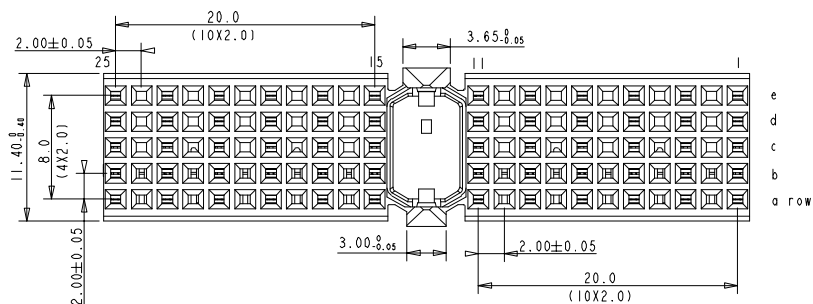

PERFORMANCE CHARACTERISTICS

CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE: 500 V AC (CONT /CONT)

OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE : 20 mΩ MAX

INSERTION FORCE: 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN /CONT

INSULATION RESISTANCE: 10⁴MΩ MIN

NOTES

1. LEAD FREE INDICATOR : LF=LEAD FREE
PERFORMANCE LEVEL INDICATOR
(REF DWG NO.BS.C.201844.003)
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- 3.FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- 4.THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-22-008

Material				Spec ref			
Mat code		Heattreat		tolerance		projection	MM
Plating/Finish		Dr		24 9 96		size	Scale
Product family		MILLIPACS		Model Name		ECN	Rev.
Model Revision		REL Level		CUSTOMER DRAWING		sheet 1 of 1	
Model Name		Model Revision		REL Level		CUSTOMER DRAWING	
Model Name		Model Revision		REL Level		CUSTOMER DRAWING	
Model Name		Model Revision		REL Level		CUSTOMER DRAWING	
Model Name		Model Revision		REL Level		CUSTOMER DRAWING	
Model Name		Model Revision		REL Level		CUSTOMER DRAWING	

rev	ecn no	dr	date
A	CONVERSION REVISION 00	KN	14-9-01
B	DG05-0278	Kason	02-08-05
C	DG10-0110	NZ	05/30/10
-	-	-	-
-	-	-	-
-	-	-	-



WILLIPACS 2 LOADING
PATTERN RIGHT ANGLE FEMALE

BSC202468002