


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KC-59-642-M06

REVISIONS		
ISSUE	CHANGES	
2	CN	33220 C
	KH	08/19/91

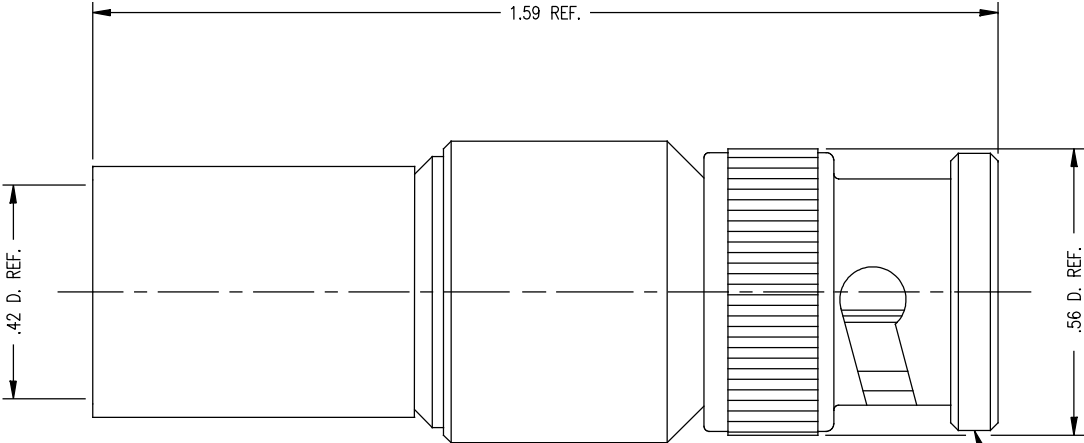

- NOTES:
1. FOR USE WITH BELDEN 8214, 9913 AND 9914 CABLE.
 2. FOR CABLING INSTRUCTIONS SEE CP-480.
 3. FOR CABLE TRIMMING USE KTJ-137 & KTD-138.
 4. FOR CRIMPING USE DIE KTH-2135.
 5. INTERFACE PER MIL-STD-348, FIG. 301-1.
 6. CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
 7. MATERIALS:
INSULATOR: TEFLON, ASTM-D-1457
K-GRIP SLEEVE: COM. BRONZE, ALLOY 220
GASKET: SILICONE RUBBER, ZZ-R-765
SPRING WASHER: BER. COPPER, ASTM-B-196
ALL OTHER METAL PARTS: BRASS, ASTM-B16
 8. FINISHES:
SPRING WASHER: SILVER PLATE, QQ-S-365
CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
 9. ELECTRICAL CHARACTERISTICS:
NOMINAL INPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz

STAMP: KINGS KC-59-642-M06

GSD

DET1541	

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
PLUG, BNC	
DRAWN MJB	DATE 01/12/94
DESIGN	DATE
APPR.	DATE
 ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	

KC-59-642-M06