



Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du propietaire.
Propriete de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI. Copyright FCI.

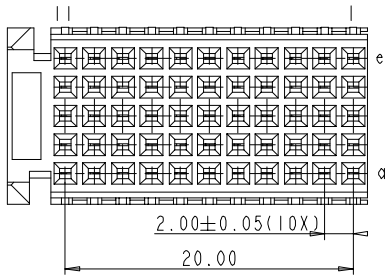

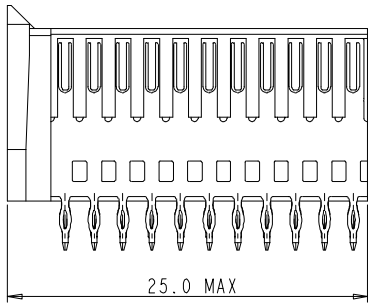

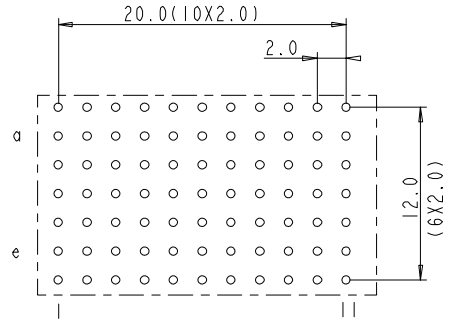

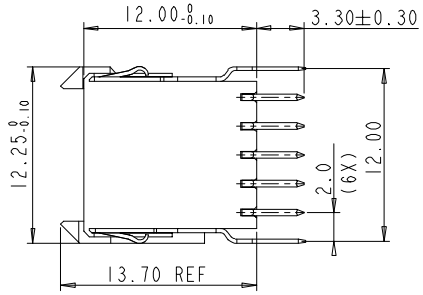

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT /CONT)

OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX INSULATION RESISTANCE : 10^4 MΩ MIN

INSERTION FORCE : 0.75N MAX/CONT EXTRACTION FORCE : 0.15N MIN/CONT

NOTES

1.HM2S30PE5101
- LEAD FREE INDICATOR : LF=LEAD FREE(DIGIT 15&16)
- PLATING CODE(DIGIT 13&14)

Plating code	Plating	Performance Level
AA	0.75µm Au	IEC performance level 2(250mating cycles)orTELCORDIA CO)
AB	1.25µm Au	TELCORDIA UE

2. THIS PRODUCT IS CSA APPROVED.
   THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	DG09-0243	NZ	Jul-20-2009
B	DG10-0093	NZ	Mar-08-2010
C	DG10-0110	NZ	Jun-08-2010
-	-	-	-
-	-	-	-
-	-	-	-

Material			Spec ref	
Mat code				
Heattreat			tolerance: 1DEC±0.2 2DEC±0.1 ANGLES±1° HOEKEN	projection: MM
Plating/Finish				
Dr	Nickor Zuo	Jul-20-09		size A4 / Scale 2.000
Eng	Nickor Zuo	Jul-20-09	Product family	
Chr	PeiMing Zheng	Jul-20-09	Model Name HM2S30PE5101	ECN
Appr	Joseph Hsia	Jul-20-09	Model Revision	REL Level

FCI	title: MILLIPACS 2/TYPE C(W/O LOCK.PEG) SHIELDED	dwg no: BSC201418007	Rev. C
Pro/E file	catalog no: HM2S30PE5101----	CUMSTOMER DRAWING	sheet 1 of 1

PDM: Rev:C STATUS:Released Printed: Mar 15, 2011

Downloaded from Arrow.com.