


SK14400


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

| DATE | REV | REVISION RECORD | APP | DR | CK |
|---|---|---|---|---|---|
| 9-17-12 | NC | ECO 36980 | COLE | BS | COLE |
| | | | | | |
| | | | | | |
| | | | | | |

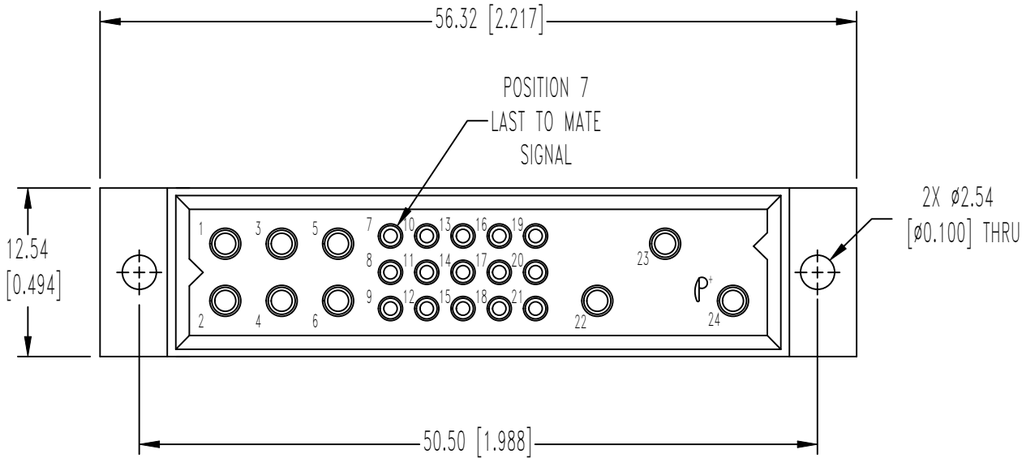

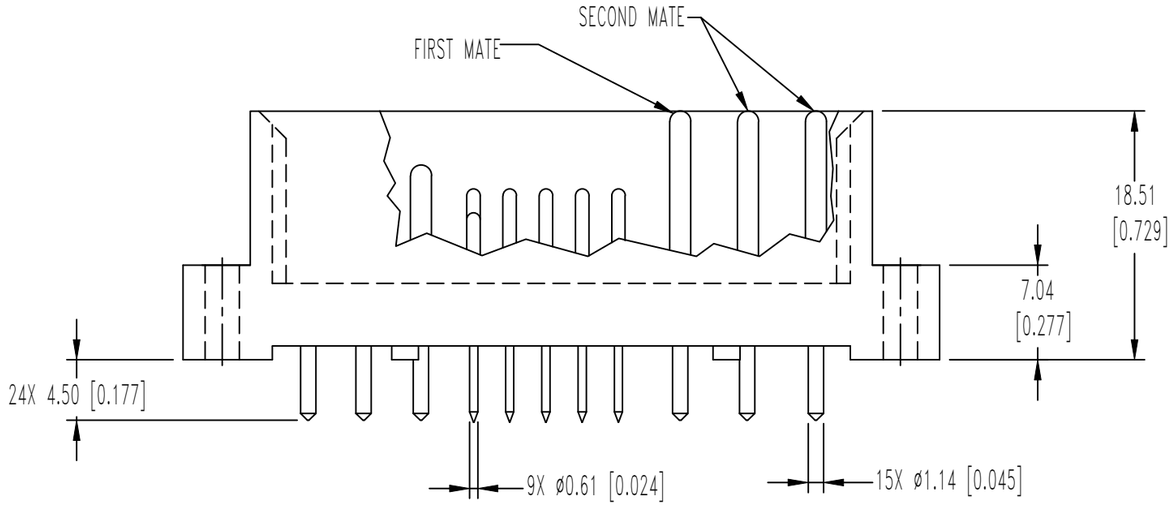


CONTACT HOLE PATTERN

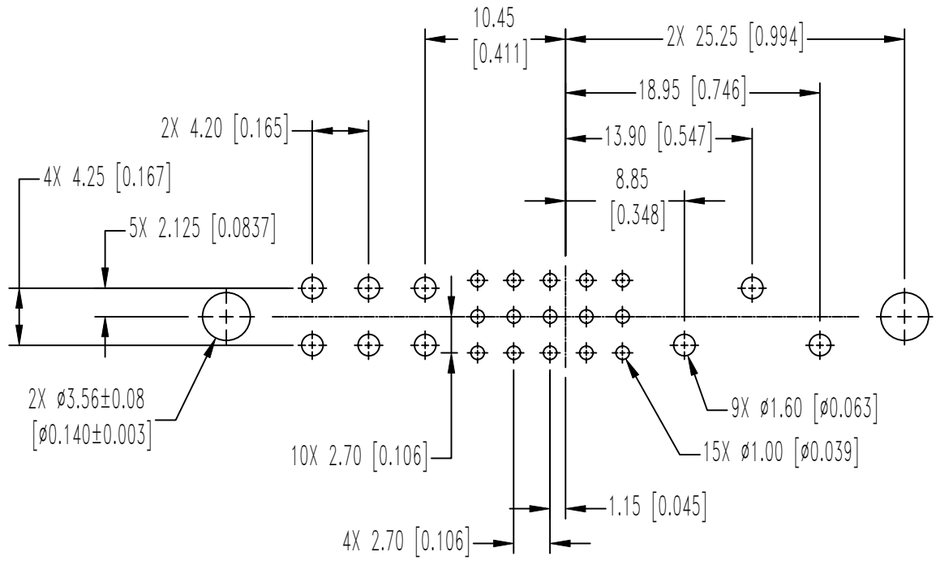NOTES:

1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED POLYESTER, UL 94V-0, COLOR: BLUE.
   CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST COMPACT POWER PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/33/COMPACTPOWERCONNECTORS OR CONNECTPOSITRONIC.COM.
3. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
4. DIMENSIONS ARE IN MILLIMETERS [INCHES].

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com
FSCM 28198

| | | | |
|---|---|---|---|
| DECIMAL TOL. 0.38 [0.015] | PCI SERIES | SCALE N.T.S. | DRAWN BY B SHELLEDY |
| | | | APPROVED BY COLE |
| | TITLE PCIB24W9M300A1/AA | | |
| ANGULAR TOL. ± 5° | DATE 9-17-12 | DRAWING NUMBER SK14400 | REV. NC |

Downloaded from Arrow.com.