
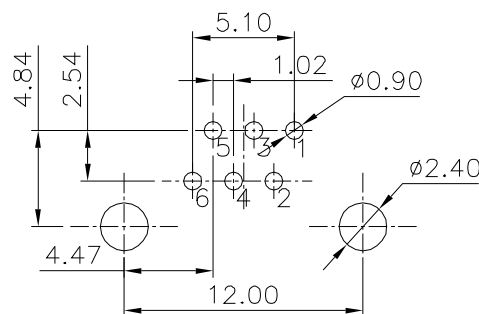
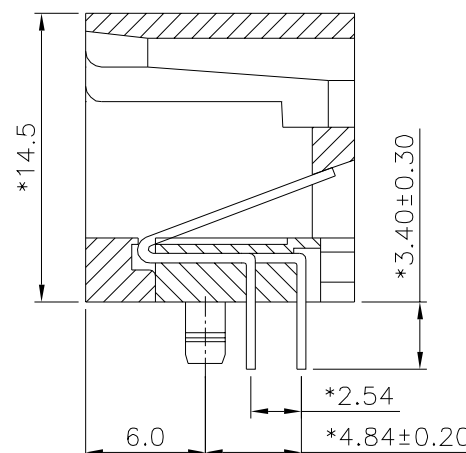


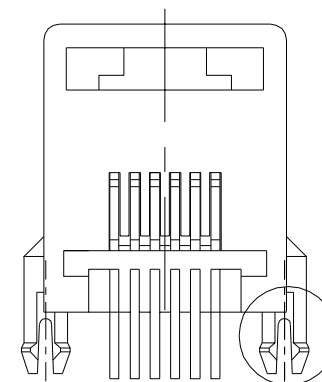
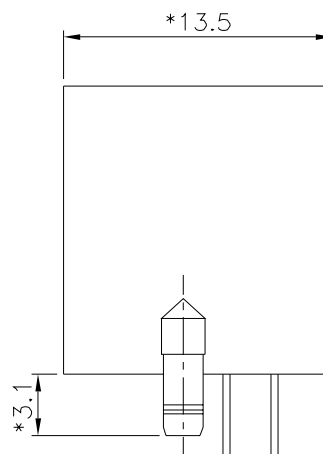


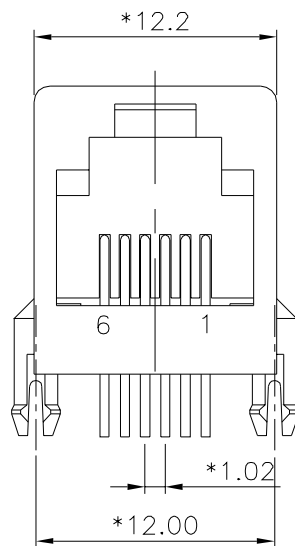

PC Board Layout T=1.6mm

Component Side Shown Tolerance±0.05mm

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 45 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED NYLON UL94V-0, GRAY
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION TEMPERATURE : -40°C TO $+85^{\circ}\text{C}$.
3. WAVE SOLDERING TEMPERATURE: $230\sim 250^{\circ}\text{C}$ (3~5 SECINDS)
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER

E5566-Q0LK22-L

DETACHED LISTS	MM (INCH)		RoHS Compliant		Pulse A TECHNITROL COMPANY	
	TOLERANCES EXCEPT AS NOTED		TITLE MINI L/P PCB JACK			
	MM					
	.0 ± 0.2	±	ANGLES ± 0.5			
	.00 ± 0.15	±				
	.000 ± 0.075	±				
THIRD ANGLE PROJECTION		DFTO Cathy	DRAWING NO. CE553027-LC		SIZE	REV
		DATE 2006/09/11	/PART NO. SEE TABLE		A3	0
		SCALE : 4:1	DO NOT SCALE DRAWING		SHEET 1	OF 1