NTD4979N

Power MOSFET

30 V, 41 A, Single N−Channel, DPAK/IPAK

Features

- Low $R_{DS(on)}$ to Minimize Conduction Losses
- Low Capacitance to Minimize Driver Losses
- Optimized Gate Charge to Minimize Switching Losses
- Three Package Variations for Design Flexibility
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant

Applications

- CPU Power Delivery
- DC−DC Converters

ON Semiconductor®

http://onsemi.com

$V_{(BR)DSS}$	$R_{DS(ON)}$ MAX	I_D MAX
30 V	9.0 mΩ @ 10 V	41 A
	19 mΩ @ 4.5 V	



N−CHANNEL MOSFET

MAXIMUM RATINGS (T_J = 25°C unless otherwise stated)

Parameter			Symbol	Value	Unit
Drain−to−Source Voltage			V_{DSS}	30	V
Gate−to−Source Voltage			V_{GS}	±20	V
Continuous Drain Current $R_{\theta JA}$ (Note 1)	Steady State	T_A = 25°C	I_D	12.7	A
		T_A = 100°C		9.0	
Power Dissipation $R_{\theta JA}$ (Note 1)		T_A = 25°C	P_D	2.56	W
Continuous Drain Current $R_{\theta JA}$ (Note 2)		T_A = 25°C	I_D	9.4	A
		T_A = 100°C		6.6	
Power Dissipation $R_{\theta JA}$ (Note 2)		T_A = 25°C	P_D	1.38	W
Continuous Drain Current $R_{\theta JC}$ (Note 1)		T_C = 25°C	I_D	41	A
		T_C = 100°C		29	
Power Dissipation $R_{\theta JC}$ (Note 1)		T_C = 25°C	P_D	26.3	W
Pulsed Drain Current	t_p=10μs	T_A = 25°C	I_{DM}	150	A
Current Limited by Package		T_A = 25°C	$I_{DmaxPkg}$	40	A
Operating Junction and Storage Temperature			T_J, T_{STG}	−55 to +175	°C
Source Current (Body Diode)			I_S	24	A
Drain to Source dV/dt			dV/dt	6.0	V/ns
Single Pulse Drain−to−Source Avalanche Energy (T_J = 25°C, V_{DD} = 24 V, V_{GS} = 10 V, I_L = 19 A_{pk}, L = 0.1 mH, R_G = 25 Ω)			EAS	18	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			T_L	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Surface−mounted on FR4 board using 1 sq−in pad, 1 oz Cu.
2. Surface−mounted on FR4 board using the minimum recommended pad size.

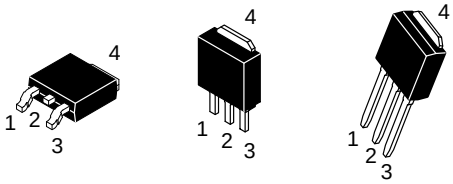

CASE 369AA DPAK (Bent Lead) STYLE 2 | **CASE 369AC 3 IPAK (Straight Lead)** | **CASE 369D IPAK (Straight Lead DPAK)**

MARKING DIAGRAMS & PIN ASSIGNMENTS

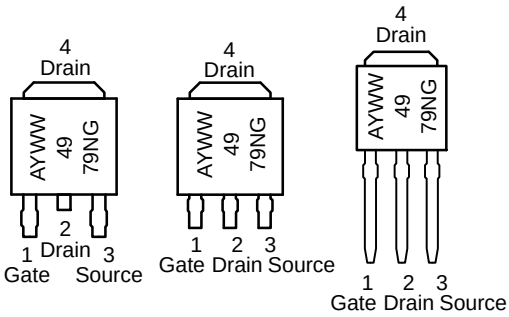

A	= Assembly Location
Y	= Year
WW	= Work Week
4979N	= Device Code
G	= Pb−Free Package

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 3 of this data sheet.

© Semiconductor Components Industries, LLC, 2014

May, 2014 − Rev. 1

Publication Order Number:
NTD4979N/D

Downloaded from Arrow.com.

THERMAL RESISTANCE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Junction−to−Case (Drain)	$R_{\theta JC}$	5.7	°C/W
Junction−to−TAB (Drain)	$R_{\theta JC-TAB}$	4.3	
Junction−to−Ambient – Steady State (Note 3)	$R_{\theta JA}$	58.6	
Junction−to−Ambient – Steady State (Note 4)	$R_{\theta JA}$	108.6	

3. Surface−mounted on FR4 board using 1 sq−in pad, 1 oz Cu.
4. Surface−mounted on FR4 board using the minimum recommended pad size.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
OFF CHARACTERISTICS							
Drain−to−Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0 V, I_D = 250 μA		30			V
Drain−to−Source Breakdown Voltage Temperature Coefficient	$V_{(BR)DSS}/T_J$				17		mV/°C
Zero Gate Voltage Drain Current	I_{DSS}	V_{GS} = 0 V, V_{DS} = 24 V	T_J = 25°C			1.0	μA
			T_J = 125°C			10	
Gate−to−Source Leakage Current	I_{GSS}	V_{DS} = 0 V, V_{GS} = ±20 V				±100	nA
ON CHARACTERISTICS (Note 5)							
Gate Threshold Voltage	$V_{GS(TH)}$	V_{GS} = V_{DS}, I_D = 250 μA		1.5	1.8	2.5	V
Negative Threshold Temperature Coefficient	$V_{GS(TH)}/T_J$				4.5		mV/°C
Drain−to−Source On Resistance	$R_{DS(on)}$	V_{GS} = 10 V	I_D = 30 A		6.9	9.0	mΩ
			I_D = 15 A		6.9		
		V_{GS} = 4.5 V	I_D = 30 A		13.6	19	
			I_D = 15 A		13.2		
Forward Transconductance	g_{FS}	V_{DS} = 1.5 V, I_D = 30 A			36		S
CHARGES, CAPACITANCES AND GATE RESISTANCE							
Input Capacitance	C_{ISS}	V_{GS} = 0 V, f = 1.0 MHz, V_{DS} = 15 V			837		pF
Output Capacitance	C_{OSS}				347		
Reverse Transfer Capacitance	C_{RSS}				180		
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 4.5 V, V_{DS} = 15 V, I_D = 30 A			9.0		nC
Threshold Gate Charge	$Q_{G(TH)}$				1.42		
Gate−to−Source Charge	Q_{GS}				2.8		
Gate−to−Drain Charge	Q_{GD}				4.8		
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 10 V, V_{DS} = 15 V, I_D = 30 A			16.5		nC
SWITCHING CHARACTERISTICS (Note 6)							
Turn−On Delay Time	$t_{d(ON)}$	V_{GS} = 4.5 V, V_{DS} = 15 V, I_D = 15 A, R_G = 3.0 Ω			10		ns
Rise Time	t_r				27		
Turn−Off Delay Time	$t_{d(OFF)}$				13.3		
Fall Time	t_f				6.4		

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.
6. Switching characteristics are independent of operating junction temperatures.
7. Assume terminal length of 110 mils.

Downloaded from Arrow.com.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
SWITCHING CHARACTERISTICS (Note 6)							
Turn−On Delay Time	$t_{d(ON)}$	V_{GS} = 10 V, V_{DS} = 15 V, I_D = 15 A, R_G = 3.0 Ω			6.5		ns
Rise Time	t_r				20.2		
Turn−Off Delay Time	$t_{d(OFF)}$				17.2		
Fall Time	t_f				4.2		
DRAIN−SOURCE DIODE CHARACTERISTICS							
Forward Diode Voltage	V_{SD}	V_{GS} = 0 V, I_S = 30 A	T_J = 25°C		0.91	1.1	V
			T_J = 125°C		0.82		
Reverse Recovery Time	t_{RR}	V_{GS} = 0 V, dIS/dt = 100 A/μs, I_S = 30 A			20.8		ns
Charge Time	t_a				9.8		
Discharge Time	t_b				11		
Reverse Recovery Charge	Q_{RR}				8.0		nC
PACKAGE PARASITIC VALUES							
Source Inductance (Note 7)	L_S	T_A = 25°C			2.85		nH
Drain Inductance, DPAK	L_D				0.0164		
Drain Inductance, IPAK (Note 7)	L_D				1.88		
Gate Inductance (Note 7)	L_G				4.9		
Gate Resistance	R_G				1.0	2.2	Ω

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.
6. Switching characteristics are independent of operating junction temperatures.
7. Assume terminal length of 110 mils.

ORDERING INFORMATION

Device	Package	Shipping†
NTD4979NT4G	DPAK (Pb−Free)	2500 / Tape & Reel
NTD4979N−1G	IPAK (Pb−Free)	75 Units / Rail
NTD4979N−35G	IPAK Trimmed Lead (Pb−Free)	75 Units / Rail

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

Downloaded from Arrow.com.

TYPICAL PERFORMANCE CURVES

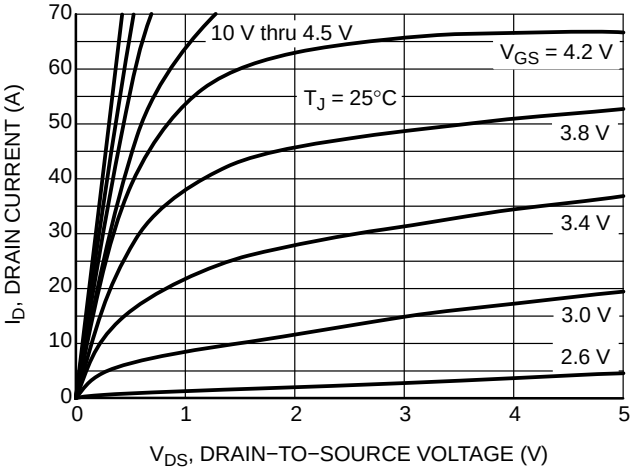

Figure 1. On−Region Characteristics

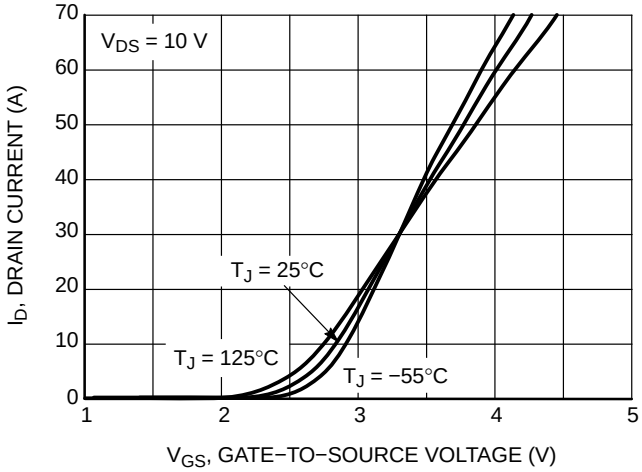

Figure 2. Transfer Characteristics

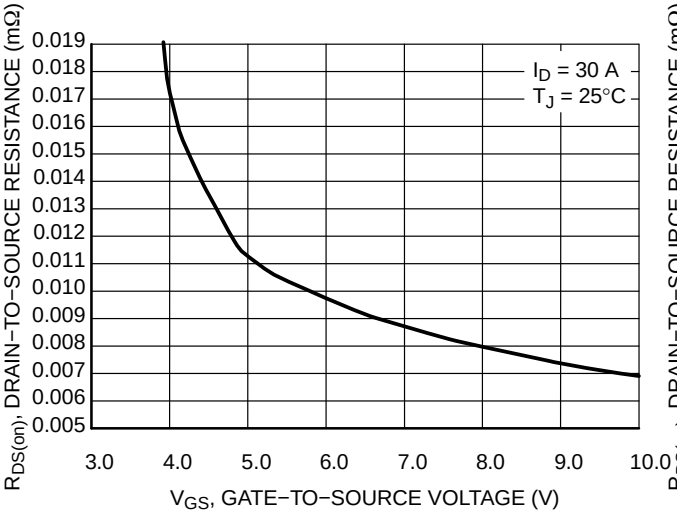

Figure 3. On−Resistance vs. Gate−to−Source Voltage

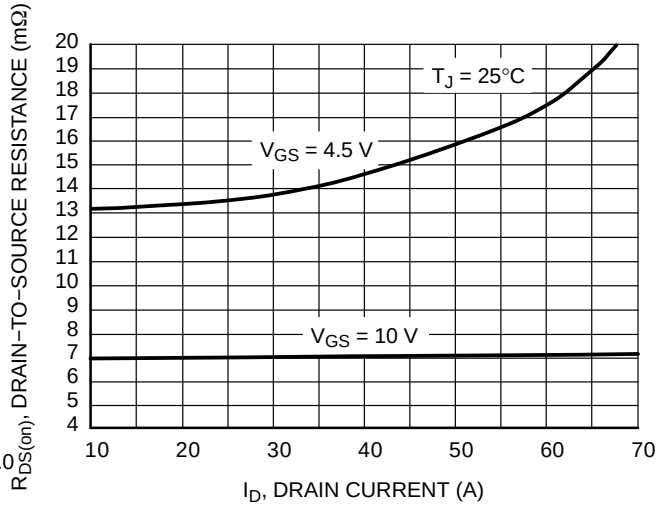

Figure 4. On−Resistance vs. Drain Current and Gate Voltage

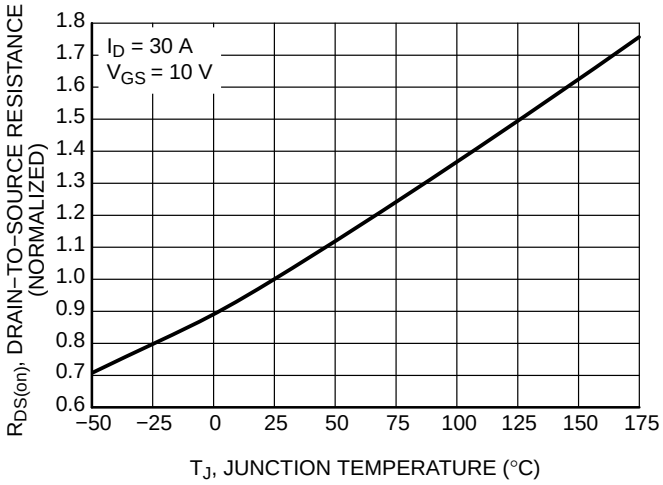

Figure 5. On−Resistance Variation with Temperature

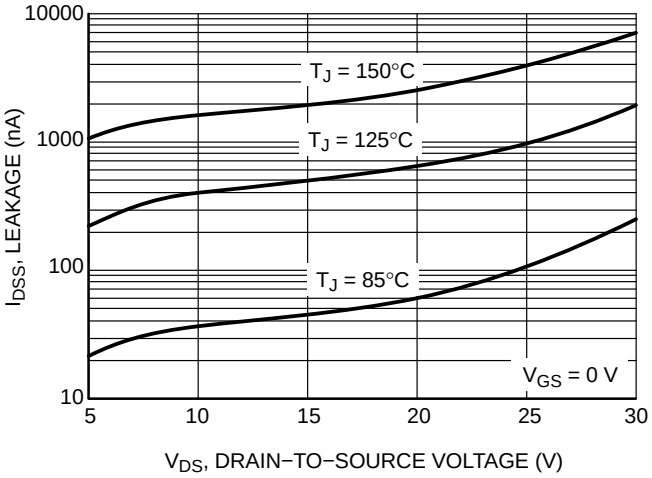

Figure 6. Drain−to−Source Leakage Current vs. Voltage

Downloaded from Arrow.com.

TYPICAL PERFORMANCE CURVES

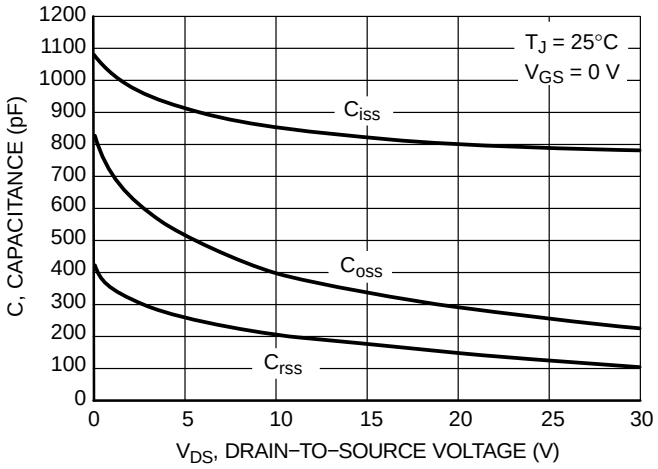

Figure 7. Capacitance Variation

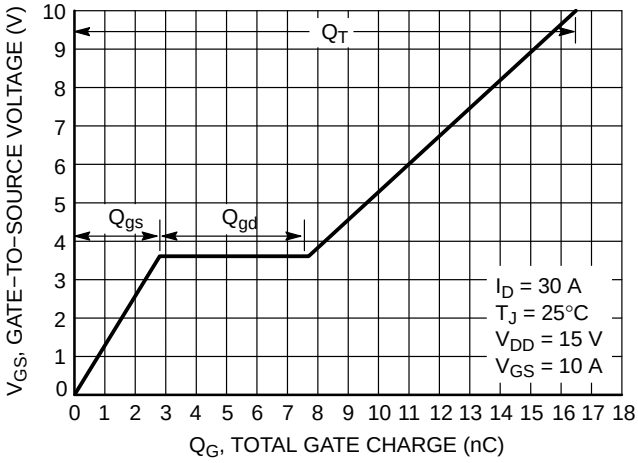

Figure 8. Gate−to−Source and Drain−to−Source Voltage vs. Total Charge

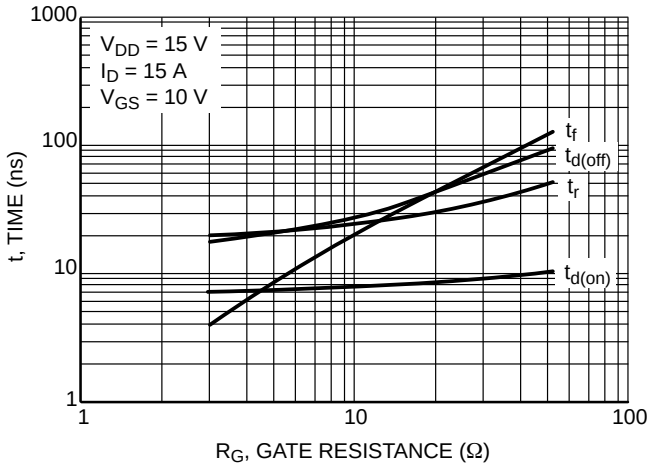

Figure 9. Resistive Switching Time Variation vs. Gate Resistance

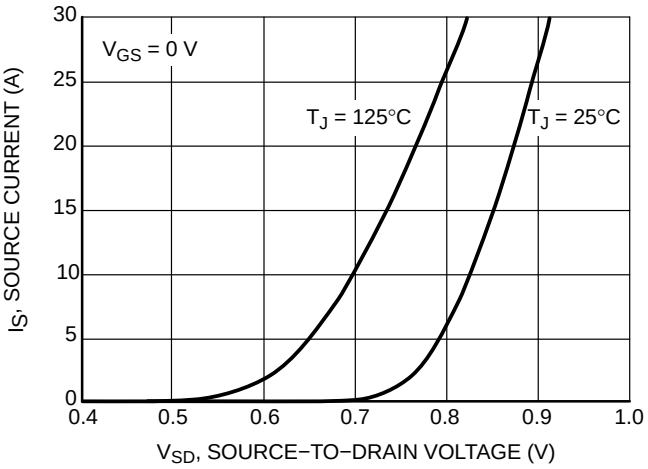

Figure 10. Diode Forward Voltage vs. Current

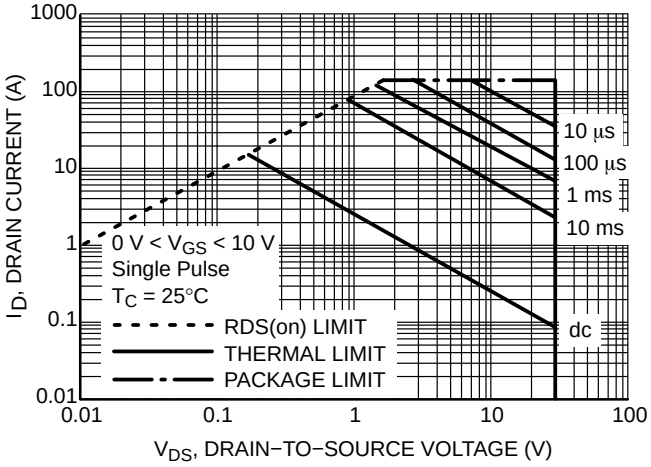

Figure 11. Maximum Rated Forward Biased Safe Operating Area

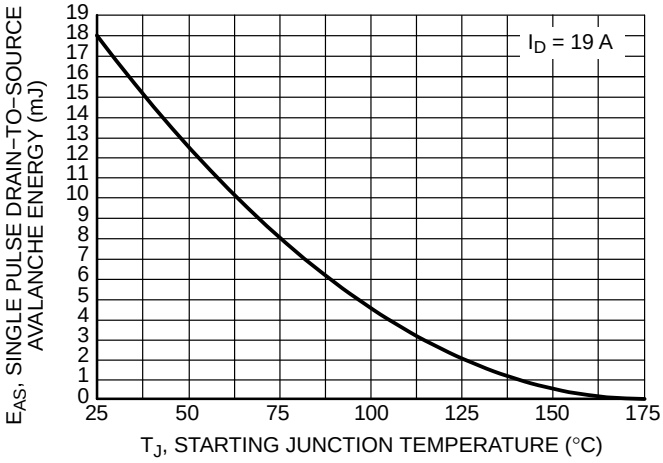

Figure 12. Maximum Avalanche Energy vs. Starting Junction Temperature

Downloaded from Arrow.com.

PACKAGE DIMENSIONS

DPAK (SINGLE GUAGE)
CASE 369AA
ISSUE B

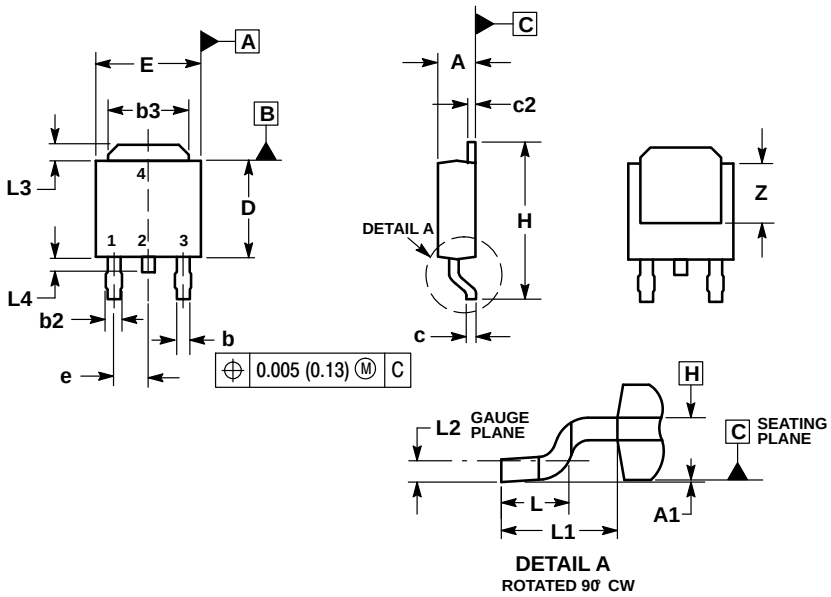

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCHES.
3. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS b3, L3 and Z.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 INCHES PER SIDE.
5. DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
6. DATUMS A AND B ARE DETERMINED AT DATUM PLANE H.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.086	0.094	2.18	2.38
A1	0.000	0.005	0.00	0.13
b	0.025	0.035	0.63	0.89
b2	0.030	0.045	0.76	1.14
b3	0.180	0.215	4.57	5.46
c	0.018	0.024	0.46	0.61
c2	0.018	0.024	0.46	0.61
D	0.235	0.245	5.97	6.22
E	0.250	0.265	6.35	6.73
e	0.090 BSC		2.29 BSC	
H	0.370	0.410	9.40	10.41
L	0.055	0.070	1.40	1.78
L1	0.108 REF		2.74 REF	
L2	0.020 BSC		0.51 BSC	
L3	0.035	0.050	0.89	1.27
L4	---	0.040	---	1.01
Z	0.155	---	3.93	---

STYLE 2:
PIN 1. GATE
2. DRAIN
3. SOURCE
4. DRAIN

SOLDERING FOOTPRINT*

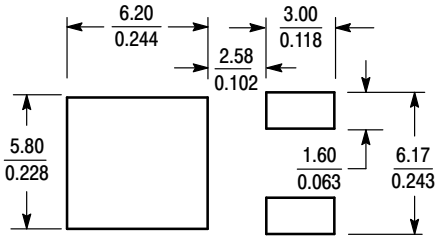

SCALE 3:1 $\left(\frac{\text{mm}}{\text{inches}}\right)$

*For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

Downloaded from Arrow.com.

PACKAGE DIMENSIONS

3 IPAK, STRAIGHT LEAD
CASE 369AC
ISSUE O

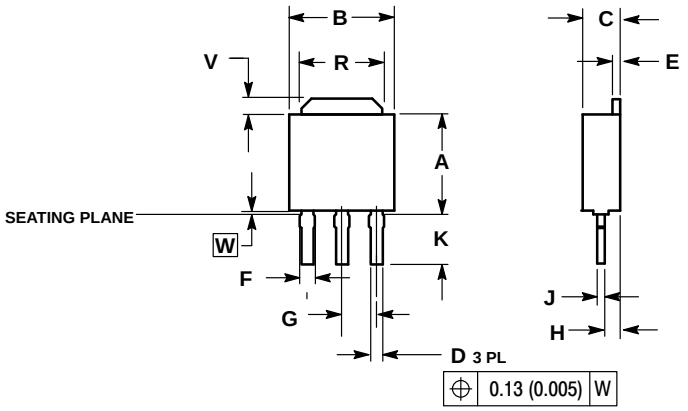

NOTES:
1.. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2.. CONTROLLING DIMENSION: INCH.
3. SEATING PLANE IS ON TOP OF DAMBAR POSITION.
4. DIMENSION A DOES NOT INCLUDE DAMBAR POSITION OR MOLD GATE.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.235	0.245	5.97	6.22
B	0.250	0.265	6.35	6.73
C	0.086	0.094	2.19	2.38
D	0.027	0.035	0.69	0.88
E	0.018	0.023	0.46	0.58
F	0.037	0.043	0.94	1.09
G	0.090 BSC		2.29 BSC	
H	0.034	0.040	0.87	1.01
J	0.018	0.023	0.46	0.58
K	0.134	0.142	3.40	3.60
R	0.180	0.215	4.57	5.46
V	0.035	0.050	0.89	1.27
W	0.000	0.010	0.000	0.25

IPAK
CASE 369D
ISSUE C

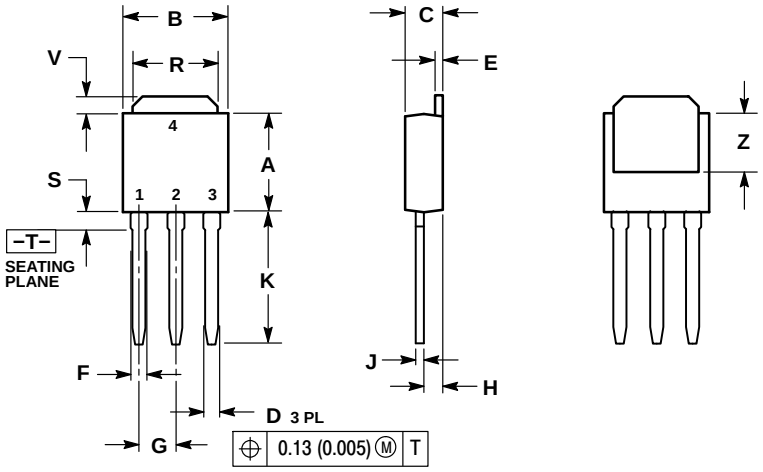

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.235	0.245	5.97	6.35
B	0.250	0.265	6.35	6.73
C	0.086	0.094	2.19	2.38
D	0.027	0.035	0.69	0.88
E	0.018	0.023	0.46	0.58
F	0.037	0.045	0.94	1.14
G	0.090 BSC		2.29 BSC	
H	0.034	0.040	0.87	1.01
J	0.018	0.023	0.46	0.58
K	0.350	0.380	8.89	9.65
R	0.180	0.215	4.45	5.45
S	0.025	0.040	0.63	1.01
V	0.035	0.050	0.89	1.27
Z	0.155	–––	3.93	–––

STYLE 2:
PIN 1. GATE
2. DRAIN
3. SOURCE
4. DRAIN

ON Semiconductor and ON are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5817−1050

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

Downloaded from Arrow.com.