Part Number : 464379310
Product Description : EXTreme Ten60Power Right-Angle Plug with Side Guides, 10 DC Power Circuits, Press Fit Tail
Series Number : 46437
Status : Active
Product Category : Board-to-Board Connectors

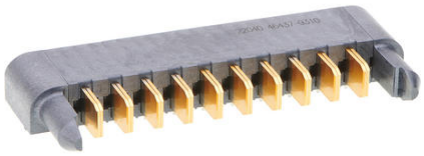

Documents and Resources

Drawings

464379310_sd.pdf

464371001-PK-000.pdf

3D Models and Design Files

STEP AP242

SOLIDWORKS

Creo

Symbol and Footprint (Multi-Format)

Specifications

PS-46436-100-001.pdf

464361000-TS-000.pdf

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 34; 33
China RoHS	per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)7771-DC (04 Feb 2026)
EU RoHS	Compliant per EU 2015/863

Downloaded from Arrow.com.

Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	Board-to-Board Connectors
Series	46437
Description	EXTreme Ten60Power Right-Angle Plug with Side Guides, 10 DC Power Circuits, Press Fit Tail
Application	Board-to-Board, Power
Comments	See Product Specification for details
Component Type	Plug
Keyword	Ten60
Product Name	EXTreme Ten60Power
UPC	195842662025

Agency

CSA	LR19980
UL	E29179

Electrical

Current - Maximum per Contact	60.0A

Downloaded from Arrow.com.

Voltage - Maximum	600V AC / 250V DC

Physical

Breakaway	No
Circuits (Loaded)	10
Circuits (maximum)	10
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Side, Yes
Keying to Mating Part	No
Lock to Mating Part	No
Mated Height	10.00mm
Material - Metal	High Conductivity Copper
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer (LCP)
Net Weight	29.815/g
Number of Rows	1
Orientation	Right Angle
Packaging Type	Tray
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.58mm
PC Tail Length	3.28mm
Pitch - Mating Interface	5.50mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
(p)ower-(s)ignal Configuration	10p - 0s
Stackable	No
Temperature Range - Operating	-40° to +105°C

Downloaded from Arrow.com.

Termination Interface Style	Through Hole - Compliant Pin

Mates With / Use With

Mates with Part(s)

Description	Part Number
EXTreme Ten60Power Right-Angle Receptacle with Side Guides, 10 DC Power Circuits, Press Fit Tail	464369310
EXTreme Ten60Power Vertical Receptacle with Side Guides, 10 DC Power Circuits, Press Fit Tail	465629310

Downloaded from Arrow.com.