EDGE® RATE SYSTEM

RUGGED HIGH-SPEED STRIPS




NRZ 28 Gbps | PAM4 56 Gbps

FEATURES & BENEFITS


Edge Rate® rugged high-speed connector strips are designed for high-speed, high cycle applications, and enabled by Samtec's signal integrity-optimized Edge Rate® contact system.


- Up to 1.5 mm contact wipe for a reliable connection
- 20 to 200 positions
- Choice of 0.50 mm, 0.635 mm or 0.80 mm pitch
- 0.50 mm pitch system offers up to 40% PCB space savings vs. 0.80 mm pitch
- 0.635 mm pitch system with extremely slim 2.5 mm body width
- Rugged latching, extended guide posts and 360° shielding
- Severe Environment Testing qualified (ERM8/ERF8); aligns with MIL-DTL-55302. Visit **samtec.com/set**

EDGE® RATE CONTACT



Signal integrity-optimized Edge Rate® contact system reduces broadside coupling

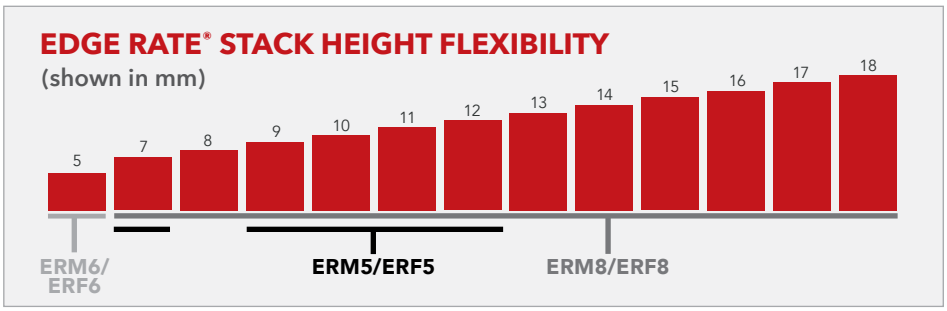



Rugged 360° shielding reduces EMI

KEY SPECIFICATIONS

SERIES	PITCH	INSULATOR MATERIAL	TERMINAL MATERIAL	PLATING	OPERATING TEMP RANGE	CURRENT RATING	VOLTAGE RATING	LEAD-FREE SOLDERABLE
ERM5 / ERF5	0.50 mm	Black LCP	Phosphor Bronze or BeCu (ERM5), BeCu (ERF5)	Au or Sn over 50 µ" (1.27 µm) Ni	-55 °C to +125 °C	1.5 A	190 VAC/ 269 VDC	Yes
ERM6 / ERF6	0.635 mm		Copper Alloy			1.4 A	155 VAC/ 219 VDC	
ERM8 / ERF8	0.80 mm		Phosphor Bronze or BeCu (ERM8), BeCu (ERF8)			2.2 A	225 VAC/ 318 VDC	

Unless otherwise approved in writing by Samtec, all parts and components are designed and built according to Samtec's specifications which are subject to change without notice.

Downloaded from Arrow.com.


EDGE® RATE SYSTEM


NRZ 28 Gbps

(0.80 mm) .0315" PITCH • RIGHT-ANGLE & EDGE MOUNT HIGH-SPEED SOCKETS

ERF8	–	POSITIONS PER ROW	–	01	–	PLATING OPTION	–	D	–	RA	–	OPTIONS	–	"X"R
Right-Angle Socket		**–010, –013, –020, –025, –030, –040, –049, –050, –060, –070, –075**				**–L** = 10 µ" (0.25 µm) Gold on contact area, Matte Tin on tail						**–L** = Latching (N/A with -EGP Option) **–EGP** = Extended Guide Post (N/A with –L Option)		**–TR** = Tape & Reel **–FR** = Full Reel Tape & Reel (must order maximum quantity per reel; contact Samtec for quantity breaks)

ERF8-RA
Board Mates: ERM8
Cable Mates: ERCD, ERDP




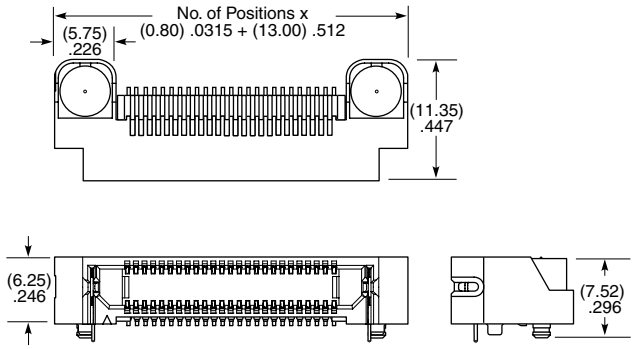


View complete specifications at: **samtec.com?ERF8-RA**

ERF8	–	POSITIONS PER ROW	–	01	–	PLATING OPTION	–	D	–	EM2	–	OPTIONS	–	"X"R
Edge Mount Socket		**–010, –013, –020, –025, –030, –040, –049, –050, –060, –070, –075**				**–L** = 10 µ" (0.25 µm) Gold on contact area, Matte Tin on tail				= (1.60 mm) .062" Thick PCB		**–EGPS** =Extended Guide Post Shield (–010, –020, –025, –030 Pos. only)		**–TR** = Tape & Reel **–FR** = Full Reel Tape & Reel (must order maximum quantity per reel; contact Samtec for quantity breaks)

ERF8-EM
Board Mates: ERM8



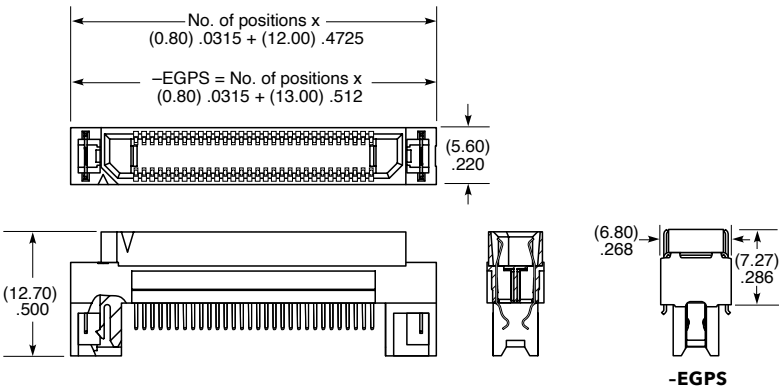

Note:
Some lengths, styles and options are non-standard, non-returnable.

View complete specifications at: **samtec.com?ERF8-EM**

Unless otherwise approved in writing by Samtec, all parts and components are designed and built according to Samtec's specifications which are subject to change without notice.
Downloaded from Arrow.com.