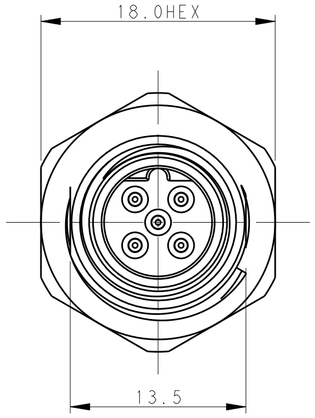
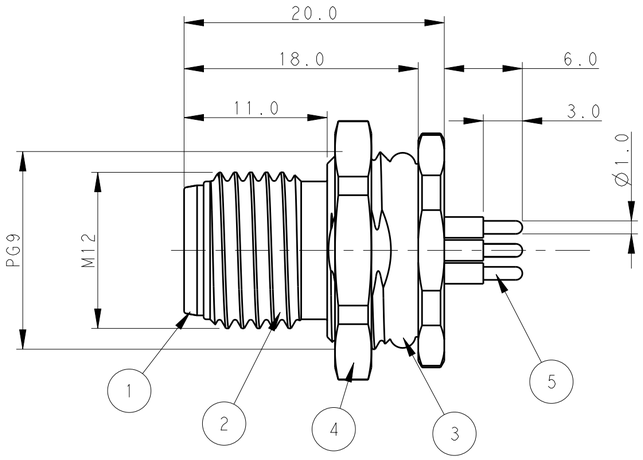
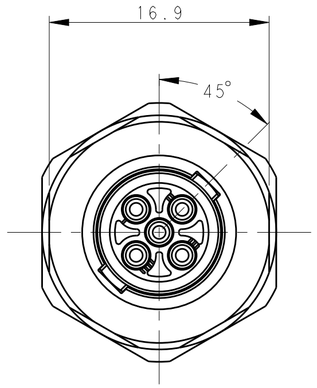
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-16-010100	14JUL2016	L.Z	X.X
	B1	ECR-18-008476	08JUN2018	G.W	C.W
	B2	ECR-18-009727	22JUN2018	G.W	C.W
	C	ECR-19-009136	20JUL2019	C.D	C.W








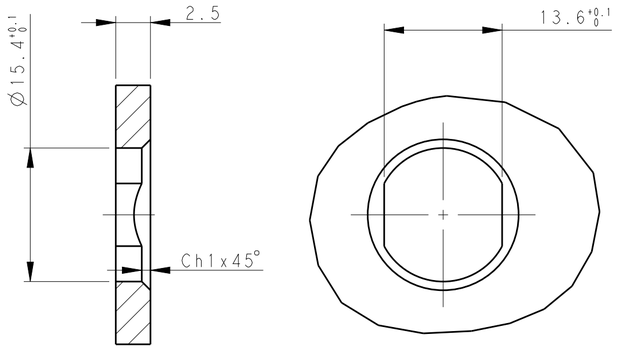


TABLE 1

TECHNICAL DATA	T4140412021-000	T4140412031-000	T4140412041-000	T4140412051-000
RATED VOLTAGE	250V	250V	250V	60V
RATED CURRENT	4A	4A	4A	4A
POLLUTION DEGREE	3	3	3	3
OVERVOLTAGE CATEGORY	II	II	II	II
MATERIAL GROUP	II	II	II	II
CONTACT RESISTANCE	<=10mΩ	<=10mΩ	<=10mΩ	<=10mΩ
INSULATION RESISTANCE	>100MΩ	>100MΩ	>100MΩ	>100MΩ
DEGREE OF PROTECTION	IP67	IP67	IP67	IP67
OPERATION TEMPERATURE	-40~85°C	-40~85°C	-40~85°C	-40~85°C



RECOMMENDED PANEL CUTOUT





NOTE:
1. TECHNICAL DATA: SEE TABLE 1
2. RECOMMENDED MOUNT PANEL SEE DETAIL
3. PRODUCT COMPLIES WITH IEC61076-2-101
4. ALL MATERIALS TO BE ROHS COMPLIANT
5. ALL MATERIALS TO BE REACH COMPLIANT
6. PN INFORMATION FOR ASSEMBLY PARTS

注释：
1：技术参数，见表1
2：推荐开孔尺寸详见如图所示
3：产品符合标准IEC61076-2-101
4：所有材料符合ROHS参照标准TEC-138-705
5：所有材料符合REACH参照标准TEC-138-705
6：成品料号信息如下：





T41404120X1-000
- CONTACT FINISH: 1; GOLD 3u''
- NUMBER OF PINS: 02: 2 PINS; 03: 3 PINS; 04: 4 PINS; 05: 5 PINS

T41404120X1-000
- 端子电镀：1：3u''金
- 针数：02：2 针; 03：3 针; 04：4 针; 05：5 针

PIN ARRANGEMENT
B-CODE

T4140412021-000	T4140412031-000	T4140412041-000	T4140412051-000
			

RECOMMENDED DRILLING DIAGRAM

T4140412021-000	T4140412031-000	T4140412041-000	T4140412051-000
			

PART NUMBER	TYPE
T4140412021-000	RPC-M12B-MF-2CON-PG9-LBU
T4140412031-000	RPC-M12B-MF-3CON-PG9-LBU
T4140412041-000	RPC-M12B-MF-4CON-PG9-LBU
T4140412051-000	RPC-M12B-MF-5CON-PG9-LBU

PLATING	MATERIAL	DESCRIPTION	ITEM	T4140412021-000	T4140412031-000	T4140412041-000	T4140412051-000
3u''GOLD PLATED	COPPER ALLOY	CONTACT	5	2	3	4	5
80u''NICKEL PLATED	COPPER ALLOY	METAL NUT	4	1	1	1	1
BLACK	RUBBER	O-RING	3	1	1	1	1
80u''NICKEL PLATED	COPPER ALLOY	M12,MALE,METAL BODY	2	1	1	1	1
-	PA66	M12,MALE HSG	1	1	1	1	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.2
2 PLC ±0.2
3 PLC ±0.2
4 PLC ±-
ANGLES ±-

MATERIAL -
FINISH -

DWN BO GAO 01FEB2016
CHK KOBBY ZHAO 01FEB2016
APVD XIANG XU 01FEB2016
PRODUCT SPEC 108-106140
APPLICATION SPEC 114-137144
WEIGHT -

TE Connectivity

NAME M12 PANEL MOUNT CONNECTOR
B CODE, MALE, REAR MOUNTING
PCB SOLDERING

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	-	C⇒T41404120X1000	-

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 1 | REV C

1471-9 (3/13)

Downloaded from Arrow.com.