


© 2022 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REACTIVATED PER ECN-22-188844	09DIC2022	SR	LR

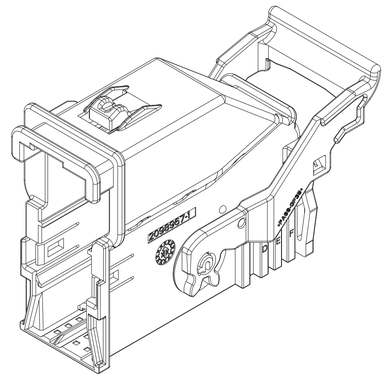

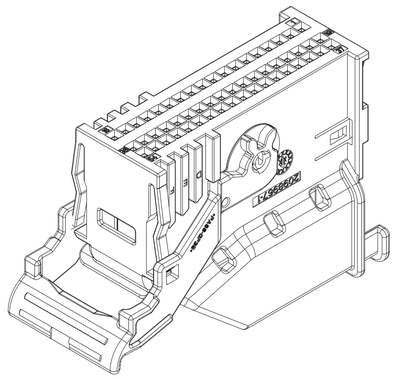



ISOMETRIC VIEWS
SCALE 2:1

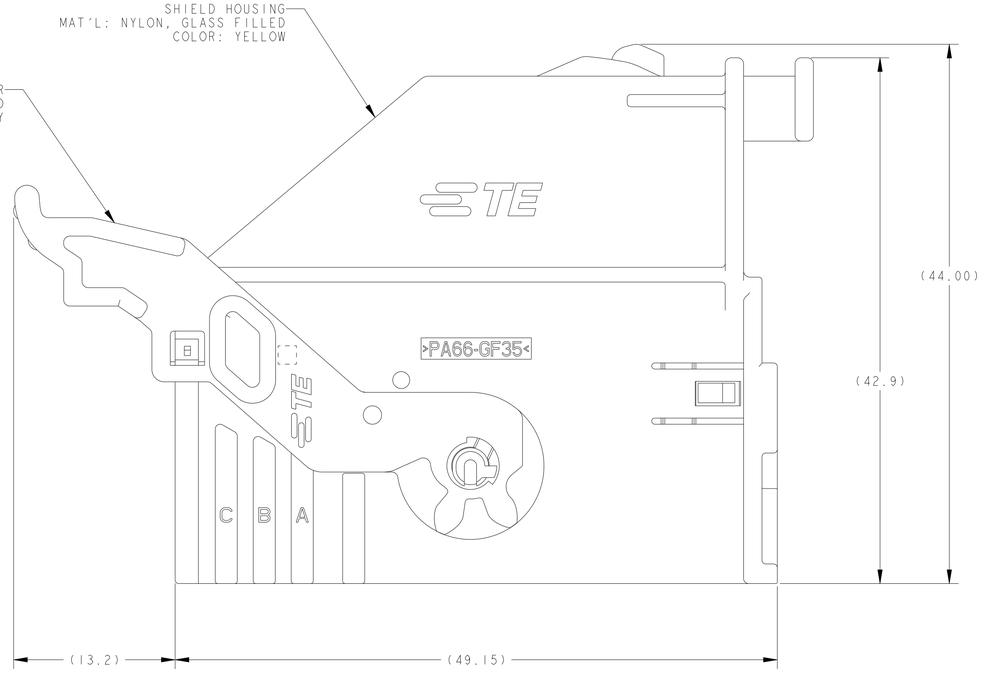

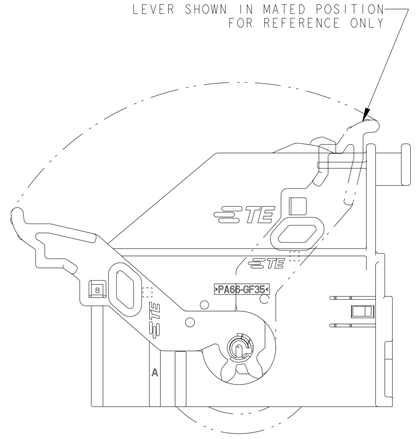

SCALE 2:1

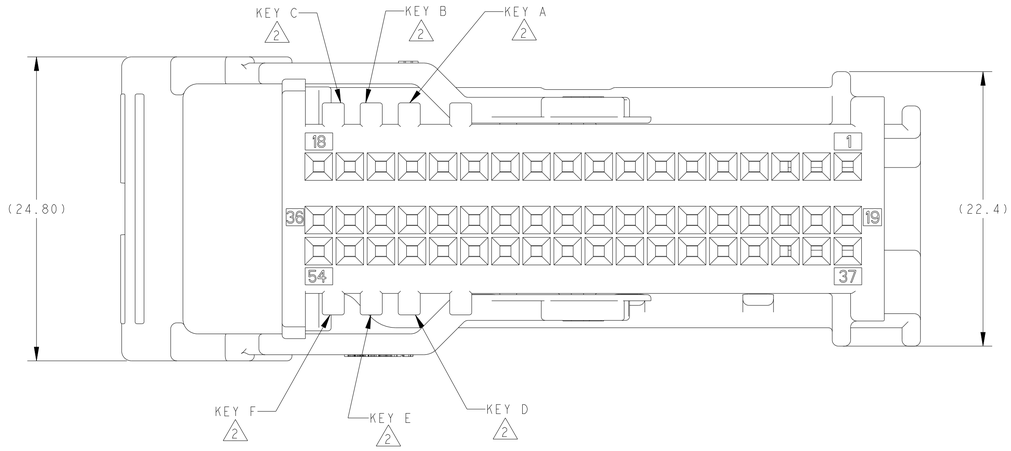

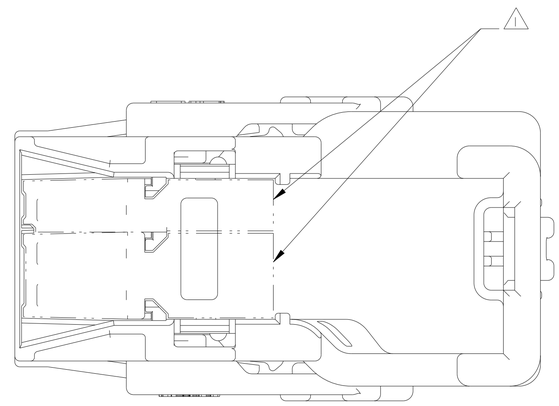

1. SHIELD ASSEMBLY ACCEPTS CARRIER PART NUMBERS 2098971-1 AND 2098972-1. CARRIERS ARE SHOWN FOR REFERENCE ONLY AND MUST BE ORDERED SEPARATELY. CARRIERS MUST BE ASSEMBLED TOGETHER BEFORE INSERTING INTO SHIELD.
2. ALL KEYS SHOWN FOR REFERENCE ONLY. SEE PART NUMBER TABLE FOR KEYING.
3. MAXIMUM WIRE LOADING: 54 TERMINALS CRIMPED TO 20 AWG WIRE WITH 1.60mm MAX OD INSULATION.
4. REFER TO INSTRUCTION SHEET 408-8662 FOR PRODUCT ASSEMBLY AND DISASSEMBLY PROCEDURES.

STATUS	KEYING	TE PART NUMBER
RELEASED	CF	2098966-7
RELEASED	AD	2098966-6
RELEASED	AE	2098966-4
RELEASED	BF	2098966-3
RELEASED	CD	2098966-2
RELEASED	AF	2098966-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.5
2 PLC ±0.20
3 PLC ±-
4 PLC ±-
ANGLES ±1

MATERIAL - SEE CALLOUT

FINISH - -

DWN J R SHUEY 12AUG2010
CHK C ALLGOOD 12AUG2010
APVD C ALLGOOD 12AUG2010
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME SHIELD ASSEMBLY, 54 POSITION, 0.64mm PLUG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-2098966	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV B

4805 (3/13)

Downloaded from Arrow.com.