


SK5329

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
2-24 04	NC	ECO 22042	RCW	YK	TK
6-4 04	A	ECO 22508		YK	

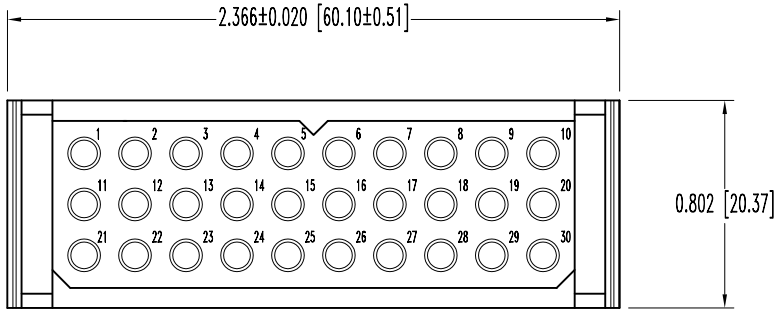



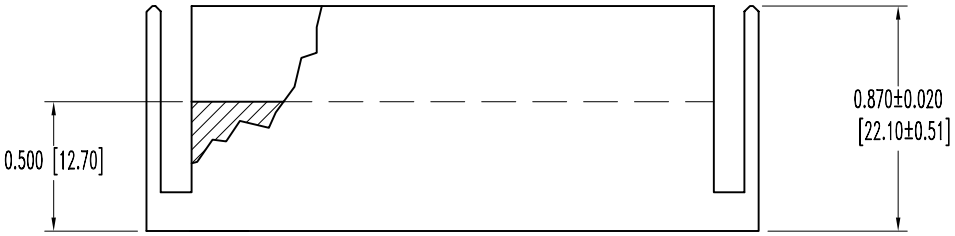

NOTES:
1. MATERIALS AND FINISHES:
   INSULATOR - GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.
2. ELECTRICAL CHARACTERISTICS:
   INSULATOR RESISTANCE - 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
   WORKING VOLTAGE - 600 VAC.
3. TEMPERATURE RANGE -55°C TO +125°C.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

DECIMAL TOL. ±0.015 [0.38]
ANGULAR TOL. ±5°

PCS SERIES
SCALE N.T.S.
DRAWN BY YK
APPROVED BY RCW
TITLE PLC30M0000
DATE 2-24-04
DRAWING NUMBER SK5329
REV. A

Downloaded from Arrow.com.