




**Part Number :** [547220304](#)  
**Product Description :** 0.50mm Pitch SlimStack Receptacle, Surface Mount, Dual Row, Vertical, 1.50mm Stacking Height, Lower Circuit Size Version, 30 Circuits, Gold Plating with Nickel Barrier Plating Between Contact and Tail  
**Series Number :** 54722  
**Status :** Active  
**Product Category :** Board-to-Board Connectors

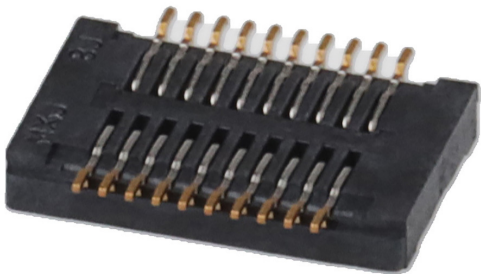

## Documents & Resources

**Drawings**  
[Drawing 547220304\\_sd.pdf](#)  
[Packaging Design Drawing SPK-54722-001-002.pdf](#)

**3D Models and Design Files**  
[2D Drawing DXF 547220304.dxf](#)  
[2D Drawing DXF \(PDF\) 547220304.pdf](#)  
[3D Model 547220304\\_stp.zip](#)

**Specifications**  
[Application Specification 547220000-A00.pdf](#)  
[Product Specification PS-54722-010-001.pdf](#)

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements  
- Eu RoHS

- REACH SVHC

- Low-Halogen

#### Multiple Part Industry Compliance Documents

- IPC 1752A Class C

- IPC 1752A Class D

- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

#### EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	Board-to-Board Connectors
Series	54722
Description	0.50mm Pitch SlimStack Receptacle, Surface Mount, Dual Row, Vertical, 1.50mm Stacking Height, Lower Circuit Size Version, 30 Circuits, Gold Plating with Nickel Barrier Plating Between Contact and Tail
Series Name	0.5, BB H1.5
Application	Board-to-Board, Signal
Comments	Embossed Tape Reel Height: 380.00mm; Gold plating with Nickel plating between contact and tail
Component Type	PCB Receptacle
Product Family	SlimStack Board-to-Board/Board-to-FPC Connectors
Product Name	SlimStack
UPC	756054574348

### Agency

UL	E29179
----	--------

### Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	50V

## Physical

Circuits (Loaded)	30
Circuits (maximum)	30
Color - Resin	Black
Durability (mating cycles max)	30
Glow-Wire Capable	No
Lock to Mating Part	None
Mated Height	1.50mm
Mated Width	6.00mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	High Temperature Thermoplastic
Net Weight	96.601/mg
Number of Rows	2
Orientation	Vertical
Packaging Type	Embossed Tape on Reel
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	0.50mm
Polarized to PCB	No
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Surface Mount

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
0.50mm Pitch Vertical SlimStack Plugs	<u>55560</u>