

XS2F/XS3F/XS5F/W/C, Y92E, XW3D

For a wide range of applications and environments the family of sensor connectors are the ideal match for the OMRON sensor portfolio. The line up is optimized to provide the best performance fit and value for money.

- M8, M12, fiber amplifier and photomicrosensor connectors
- 2, 3, 4, 5 and 8-wires
- wide application range from standard to special environments and performance requirements
- different cable and housing materials




Table of content

Cable connectors – quick guide and selection table	2
XS2F-M12 – M12 Basic line Cable type	4
XS3F-M8 – M8 Basic line Cable type	7
XS-L – M8 and M12 Sensor Connectors	9
Y92E-M12_8 – M12 8-Pin Sensor Connectors	12
XS, Y92E – M8 and M12 Robotic Sensor Connectors	13
Y92E-S_PP – Detergent and wash-down resistant polypropylene cable connectors (M8 / M12)	17
XS5W – Round Water-resistant Connectors (M12 Smartclick)	19
XS5F – Twist & click (M12)	23
XS2C/G, XS5C/G, Y92E- -conf – Confectionable plugs and connectors (self-assembly)	24
XW3D – Connector Terminal Boxes	27
E3X-CN – Fiber amplifier connectors	31
EE-1 – Photomicrosensor connectors	33
XS2 – T-connectors, Covers, Accessories, extended wiring portfolio	35

XS2F/XS3F/XS5F/W/C, Y92E, XW3D

Cable connectors – quick guide and selection table

Size	Shape	Type	Features	Material		Order code		Extended Portfolio and Specs on Page
				Nut	Cable			
M8			3 pin	Brass (CuZn)	PVC 2 m	XS3F-M8PVC3S2M	XS3F-M8PVC3A2M	7
			4pin		PUR 2 m	XS3F-M8PUR3S2M	XS3F-M8PUR3A2M	
			3 pin	Brass (CuZn)	PVC 2 m	XS3F-LM8PVC3S2M	XS3F-LM8PVC3A2M	9
			4 pin			XS3F-LM8PVC4S2M	XS3F-LM8PVC4A2M	
		Detergent resistant Wash-down	4 pin	Stainless steel (SUS316L)	PP ¹ 2 m	Y92E-S08PP4S 2M-L	Y92E-S08PP4A 2M-L	17
			4 pin	Brass (CuZn)	Robotic PVC 2 m	XS3F-M421-402-R	XS3F-M422-402-R	13
			4 pin		Robotic PUR 2 m	Y92E-M08PUR4S2M-L	Y92E-M08PUR4A2M-L	
		High robotic (drag chain & torsion)	4 pin	Brass (CuZn)	High robotic PUR 2 m	Y92E-M08PUR4S2M-R	Y92E-M08PUR4A2M-R	
M12 ²			3 wire	Brass (CuZn)	PVC 2 m	XS2F-M12PVC3S2M	XS2F-M12PVC3A2M	4
			4 wire		PUR 2 m	XS2F-M12PUR3S2M	XS2F-M12PUR3A2M	
			5 wire		PVC 2 m	XS2F-M12PVC4S2M	XS2F-M12PVC4A2M	
			3 wire	Brass (CuZn)	PUR 2 m	XS2F-M12PUR4S2M	XS2F-M12PUR4A2M	
			4 wire		PVC 2 m	XS2F-M12PVC5S2M	XS2F-M12PVC5A2M	
			3 wire	Nickel plated brass	PVC 2 m	XS2F-M12PVC3A2MPLED	XS2F-M12PVC4A2MPLED	4
			4 wire		PVC 2 m	XS2F-M12PVC4A2MPLED	XS2F-M12PUR3A2MPLED	
			3 wire		PUR 2 m	XS2F-M12PUR3A2MPLED	XS2F-M12PUR4A2MPLED	
			4 wire		PUR 2 m	XS2F-M12PUR4A2MPLED		
		Detergent resistant Wash-down	4 wire	Stainless steel (SUS316L)	PP ¹ 2 m	Y92E-S12PP4S 2M-L	Y92E-S12PP4A 2M-L	17
		105°C Heat resistant	4 wire	Stainless steel (SUS316L)	Heat resistant PVC 2 m	XS2F-E421-D80-E	XS2F-E422-D80-E	4
			4 wire	Nickel plated Zinc	PVC 2 m	XS5F-D421-D80-F	XS5F-D422-D80-F	23
			4 wire		PUR 2 m	XS5F-D421-D80-P	XS5F-D422-D80-P	
			4 wire	Brass (CuZn)	Robotic PVC 2 m	XS2F-D421-D80-F	XS2F-D422-D80-F	13
			4 wire		Robotic PUR 2 m	Y92E-M12PUR4S2M-L	Y92E-M12PUR4A2M-L	
		High robotic (drag chain & torsion)	4 wire	Brass (CuZn)	High grade robotic PUR 2 m	Y92E-M12PUR4S2M-R	Y92E-M12PUR4A2M-R	
		8 pin	8 wire shielded cable	Brass (CuZn)	Shielded PUR 2m	Y92E-M12PURSH8S2M-L	–	12
			Special fiber connector - 4 wire	PBT	PVC 2 m	E3X-CN21		31
			Special fiber connector + M8 plug	Plug: Zinc diecast	PVC 30 cm with M8 4-pin plug	E3X-CN21-M3J-2 0.3M		
			Special fiber connector + M12 plug		PVC 30 cm with M12 4-pin plug	E3X-CN21-M1J 0.3M		



Fiber amplifier (E3X) connector

XS2F/XS3F/XS5F/W/C, Y92E, XW3D

Size	Shape	Type	Features	Material		Order code		Extended Portfolio and Specs on Page
				Nut	Cable			
M8/M12		Confectionable	Plugs and connectors for self assembly	Brass	n.a.	XS2C/G, XS5C/G Y92E_conf		24
M12		Field I/O boxes	Direct wiring or DeviceNet communication	–	XW3D		31	
M8/M12		T-connectors, covers, accessories and extended wiring portfolio	n.a.	–	XS2R, XS3R, XY2F, ...		35	

¹ PP - polypropylene

² For details on pin configuration refer to specifications

XS2F-M12

Water- and Environment-resistive FA Connectors

Save Wiring and Maintenance Effort

- Compact FA connectors meet IP67 requirements and ensure a 94V-0 fire retardant rating.
- A wide array of connectors makes a wiring system more modular, simplifies maintenance, and reduces downtime.
- IEC61076-2-101(IEC60947-5-2)
- Lineup of connectors with LEDs for easy visual confirmation of Sensor operating status.



Ratings and Specifications

Item	XS2F-M12□□□□□□□M	XS2F-M12□□□□A□□M□LED
Rated current	4A	
Rated voltage	125 VDC	24 VDC
Contact resistance (Connector)	40 mΩ max. (20 mV max., 100 mA max.)	
Insulation resistance	1,000 MΩ min. (at 500 VDC)	-
Dielectric strength (Connector)	AC 1,500 V 1 min. (leakage current: 1 mA max.).	-
Degree of protection	IP67 (IEC60529)	
Temperature range	-10 to +80°C	

Materials and Finish

Contacts	Copper alloy/ nickel base, gold plating
Pin block	PBT resin (UL94 V-0)
Fixtures	Copper alloy/ nickel plating
Cover	PBT resin (UL94V-0)

PVC Cable


Item	3 cores	4 cores
Color	Black	
Outer diameter	5 mm dia.	5 mm dia. *
Conductor size	AWG23 0.25 mm ² (32/0.1)	
Approvals	AWM2464	
Features	Flame retardant	

*LED Type is 5.4 mm dia.

PUR Cable

Item	3 cores	4 cores
Color	Black	
Outer diameter	4.3 mm dia.	4.7 mm dia.
Conductor size	AWG22 0.32 mm ² (42/0.1)	
Approvals	AWM20936	
Features	Flame retardant Halogen free Oil resistance	

Connector Pinout Diagram (from Mating Side)

Item	No. of poles	4 poles
DC type	Male (plug) contacts	
	Female (socket) contacts	

XS2F M12 Sockets on One Cable End


XS2F-M12PVC□□□□M PVC cable

XS2F-M12PUR□□□□M PUR cable


Dimensions

(Unit: mm)

Straight

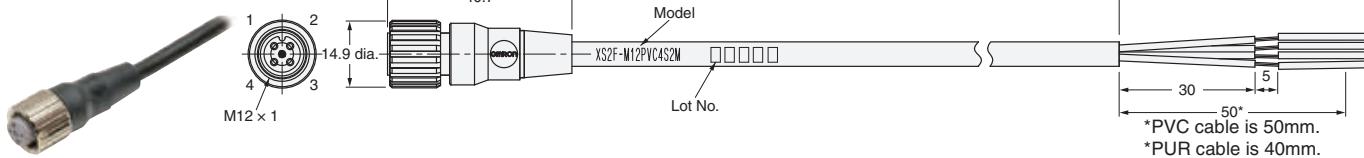


Right-angle

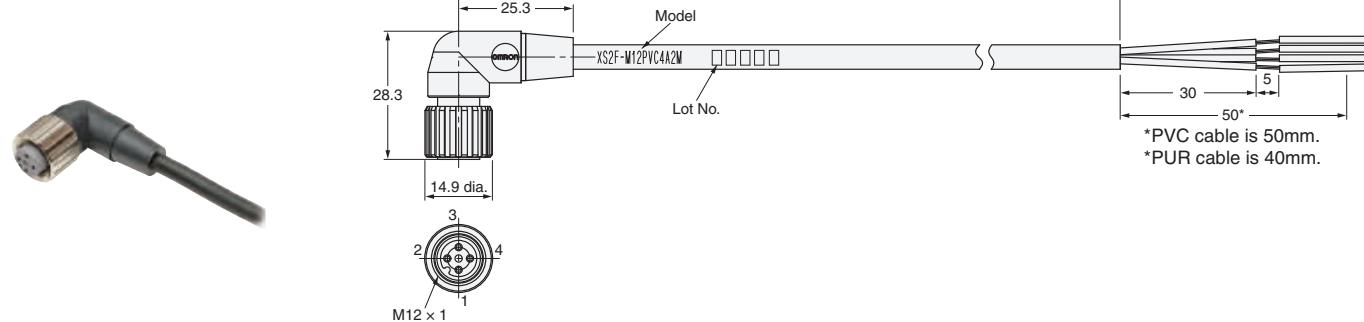

Note: For 3-core, pin 2 is not connected internally

Wiring Diagram

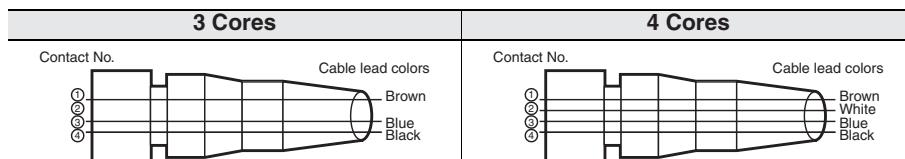

Ordering Information

Cable type	No. of cable cores	Cable outer diameter	Cable connection direction	Cable length (m)	Model	
PVC	3	5.0 dia	Straight	2	XS2F-M12PVC3S2M	
				5	XS2F-M12PVC3S5M	
			Right-angle	10	XS2F-M12PVC3S10M	
				2	XS2F-M12PVC3A2M	
	4		Straight	5	XS2F-M12PVC3A5M	
				10	XS2F-M12PVC3A10M	
			Right-angle	2	XS2F-M12PVC4S2M	
				5	XS2F-M12PVC4S5M	
PUR	3	4.3 dia	Straight	7	XS2F-M12PVC4S7M	
				10	XS2F-M12PVC4S10M	
			Right-angle	2	XS2F-M12PVC4A2M	
				5	XS2F-M12PVC4A5M	
				7	XS2F-M12PVC4A7M	
	4		Straight	10	XS2F-M12PVC4A10M	
				2	XS2F-M12PUR3S2M	
			Right-angle	5	XS2F-M12PUR3S5M	
				10	XS2F-M12PUR3S10M	
				2	XS2F-M12PUR3A2M	
	4.7 dia	Straight	5	XS2F-M12PUR3A5M		
			10	XS2F-M12PUR3A10M		
		Right-angle	2	XS2F-M12PUR4S2M		
			5	XS2F-M12PUR4S5M		
			10	XS2F-M12PUR4S10M		

XS2F M12 Sockets on One Cable End with LED


XS2F-M12PVC□A□□M□LED PVC Cable

XS2F-M12PUR□A□□M□LED PUR Cable

Dimensions

(Unit: mm)

Right-angle

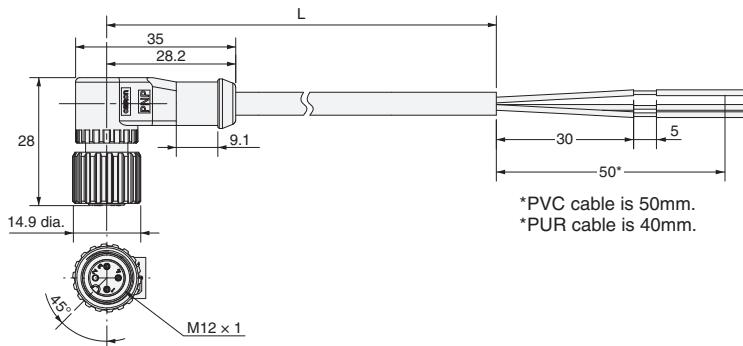

Wiring Diagram

3 Cores		4 Cores
NPN type	PNP type	PNP type
1 O 4 O 3 O	1 O 4 O 3 O	1 O 2 O 4 O 3 O
YELLOW GREEN BLACK	BLACK GREEN BLUE	BROWN WHITE BLACK R1 R2 R3 D1 D2 D3 BLUE
O + BROWN	O + BROWN	O + BROWN
O - BLUE	O - BLUE	O - BLUE

Ordering Information

Cable type	No. of cable cores	Cable outer diameter	Cable connection direction	Cable length (m)	Model	LED	
PVC	3	5.0 dia.	Right-angle	2	XS2F-M12PVC3A2MPLED	PNP	
				5	XS2F-M12PVC3A5MPLED		
				10	XS2F-M12PVC3A10MPLED		
	4	5.4 dia		2	XS2F-M12PVC3A2MNLED	NPN	
				5	XS2F-M12PVC3A5MNLED		
				10	XS2F-M12PVC3A10MNLED		
PUR	3	4.3 dia		2	XS2F-M12PUR3A2MPLED	PNP	
				5	XS2F-M12PUR3A5MPLED		
				10	XS2F-M12PUR3A10MPLED		
	4	4.7 dia		2	XS2F-M12PUR4A2MPLED		
				5	XS2F-M12PUR4A5MPLED		
				10	XS2F-M12PUR4A10MPLED		

XS3F-M8

Small Round Water-resistive Connectors

- Water-resistive, compact connector meets IP67 requirements.
- Ideal for a wide variety of FA and OA applications.
- Connectors on both cable ends require no harness work.



Ratings and Specifications

Rated current	1A
Rated voltage	125 VDC
Contact resistance (Connector)	40 mΩ max. (20 mV max., 100 mA max.)
Insulation resistance	1,000 MΩ min. (at 500 VDC)
Dielectric strength (Connector)	AC 1,000 V 1 min. (leakage current: 1 mA max.).
Degree of protection	IP67 (IEC60529)
Temperature range	-10 to +80°C

Materials and Finish

Contacts	Copper alloy/ nickel base, gold plating
Pin block	PBT resin (UL94 V-0)
Fixtures	Copper alloy/ nickel plating
Cover	PBT resin (UL94V-0)

PVC Cable

Item	3, 4 cores
Color	Black
Outer diameter	5 mm dia.
Conductor size	AWG23 0.25 mm ² (32/0.1)
Approvals	AWM2464
Features	Flame retardant

PUR Cable

Item	3 cores	4 cores
Color	Black	
Outer diameter	4.3 mm dia.	4.7 mm dia.
Conductor size	AWG22 0.32 mm ² (42/0.1)	
Approvals	AWM20936	
Features	Flame retardant Halogen free Oil resistance	

Connector Pinout Diagram (from Mating Side)

Item	Poles	3 poles	4 poles
		Male (plug) contacts	Female (socket) contacts
DC	3 poles	4○ 1○ 3○	2○○4 1○○3
	4 poles	4○ 3○ 1○	4○○2 3○○1

XS3F M8 Sockets on One Cable End


XS3F-M8PVC□□□□M PVC cable

XS3F-M8PUR□□□□M PUR cable


Dimensions

(Unit: mm)

Straight

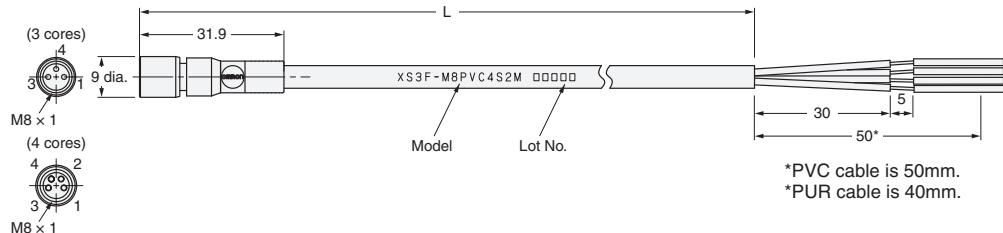

Right-angle

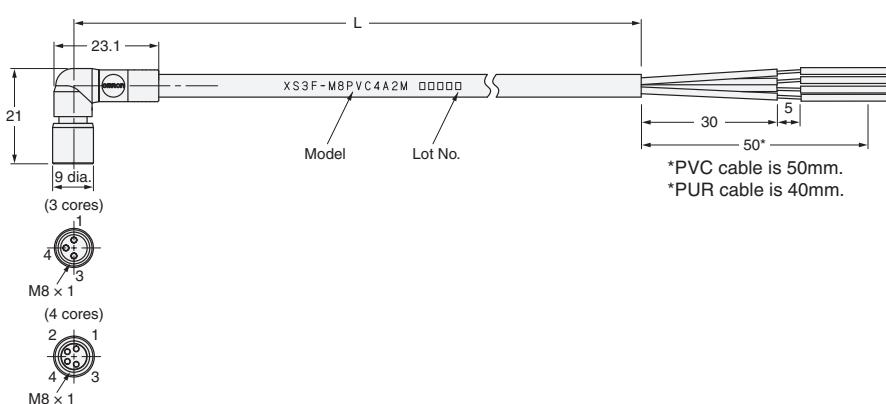

Wiring Diagram

3 Cores	4 Cores
Contact No.  Cable lead colors Brown Blue Black	Contact No.  Cable lead colors Brown White Blue Black

Ordering Information

Cable type	No. of cable cores	Cable outer diameter	Cable connection direction	Cable length (m)	Model		
PVC	3	5.0 dia.	Straight	2	XS3F-M8PVC3S2M		
				5	XS3F-M8PVC3S5M		
			Right-angle	10	XS3F-M8PVC3S10M		
				2	XS3F-M8PVC3A2M		
	4		Straight	5	XS3F-M8PVC3A5M		
				10	XS3F-M8PVC3A10M		
			Right-angle	2	XS3F-M8PVC4S2M		
				5	XS3F-M8PVC4S5M		
PUR	3	4.3 dia	Straight	10	XS3F-M8PVC4S10M		
				2	XS3F-M8PVC4A2M		
			Right-angle	5	XS3F-M8PVC4A5M		
				10	XS3F-M8PVC4A10M		
			Straight	2	XS3F-M8PUR3S2M		
	4			5	XS3F-M8PUR3S5M		
				10	XS3F-M8PUR3S10M		
	Right-angle		2	XS3F-M8PUR3A2M			
			5	XS3F-M8PUR3A5M			
	Straight		10	XS3F-M8PUR3A10M			
			2	XS3F-M8PUR4S2M			
			5	XS3F-M8PUR4S5M			
			10	XS3F-M8PUR4S10M			
	Right-angle		2	XS3F-M8PUR4A2M			
			5	XS3F-M8PUR4A5M			
			10	XS3F-M8PUR4A10M			

M8 and M12 Sensor Connectors

XS_-L

The XS_-L family provides reliable operation in standard factory environments. The M8 and M12 sensors are designed to match the specifications of OMRON Lite Line sensors and provide excellent value for money.

- M8 and M12 brass female connectors
- 3-wire and 4-wire PVC cables
- ideal specification match for sensor usage in standard factory environments



Ordering Information

Type	Size	Cable material	Features	Shape	Cable length	Order code	
Sensor connector with open cable end for standard factory environments	M8	PVC	3-wire		2 m	XS3F-LM8PVC3S2M	
					5 m	XS3F-LM8PVC3S5M	
	M12		4-wire		2 m	XS3F-LM8PVC3A2M	
					5 m	XS3F-LM8PVC3A5M	
			3-wire		2 m	XS3F-LM8PVC4S2M	
					5 m	XS3F-LM8PVC4S5M	
			4-wire		2 m	XS3F-LM8PVC4A2M	
					5 m	XS3F-LM8PVC4A5M	
			3-wire		2 m	XS2F-LM12PVC3S2M	
					5 m	XS2F-LM12PVC3S5M	
					2 m	XS2F-LM12PVC3A2M	
					5 m	XS2F-LM12PVC3A5M	
			4-wire		2 m	XS2F-LM12PVC4S2M	
					5 m	XS2F-LM12PVC4S5M	

Specifications

	M8	M12
Wire size	0.25 mm ²	0.34 mm ²
Rated current	0.5 A	0.8 A
Rated voltage	30 VDC	
Degree of protection	IP67 (IEC 60529)	
Ambient temperature	-10°C to 65°C	

Pin arrangement

M8 3-wire	M8 4-wire	M12 3-wire	M12 4-wire
 1 = brown 3 = blue 4 = black	 1 = brown 2 = white 3 = blue 4 = black	 1 = brown 2 = n.c. 3 = blue 4 = black	 1 = brown 2 = white 3 = blue 4 = black

Dimensions

(Unit: mm)


Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

XS3F


M8 Screw-on cable connectors

3-wire

Straight connectors

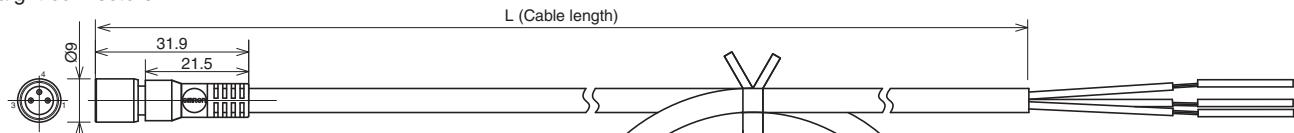


L-shaped connectors

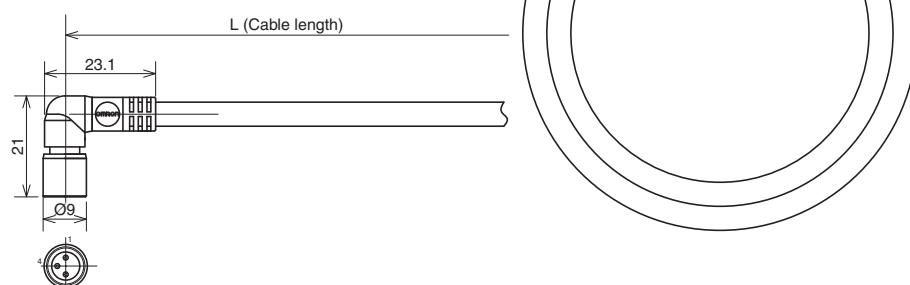


4-wire

Straight connectors

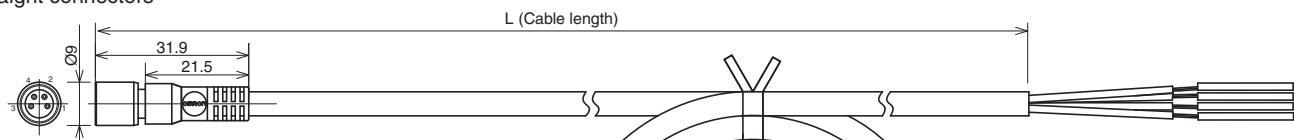

L-shaped connectors

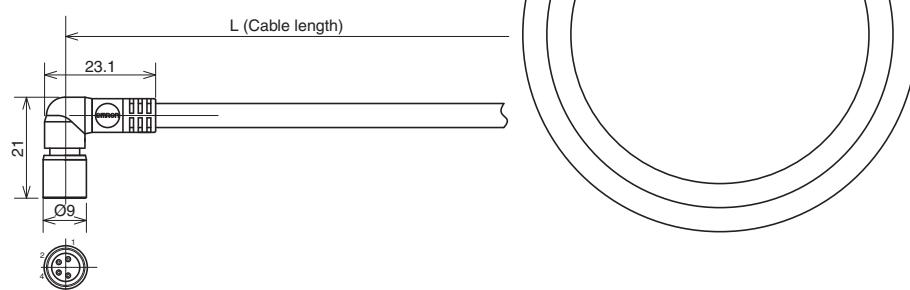


XS2F


M12 Screw-on cable connectors

3-wire

Straight connectors

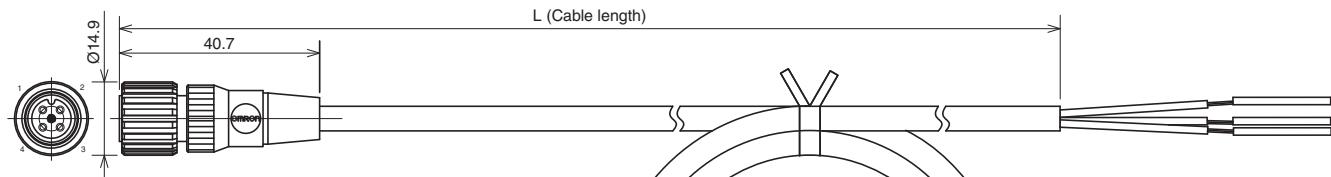


L-shaped connectors

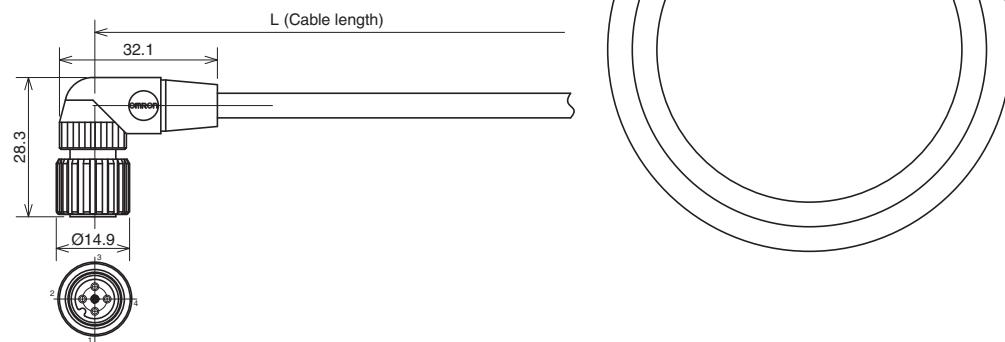


4-wire

Straight connectors

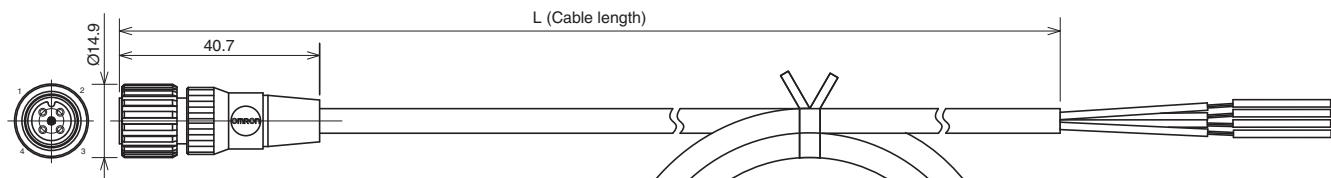

L-shaped connectors

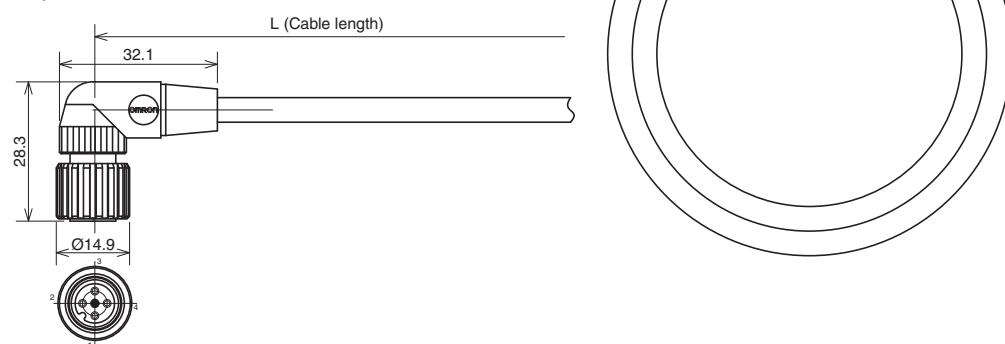

Y92E-M12_8

For the connection of sensors with M12 8-pin connectors, the Y92E-M12_8 family provides error-free signal transmission in standard and challenging environments.

- M12 8-pin brass connectors
- Halogen-free PUR cable with outer shielding layer



Ordering Information

Type	Size	Cable material	Features	Shape	Cable length	Order code		
Sensor connector with open cable end	M12	PUR	8-pin, outer shielding layer		2 m	Y92E-M12PURSH8S2M-L		
					5 m	Y92E-M12PURSH8S5M-L		
					10 m	Y92E-M12PURSH8S10M-L		
					25 m	Y92E-M12PURSH8S25M-L		
Female-male extension connector					0.6 m	Y92E-M12FSM12MSPURSH806M-L		
					2 m	Y92E-M12FSM12MSPURSH82M-L		
					5 m	Y92E-M12FSM12MSPURSH85M-L		
					10 m	Y92E-M12FSM12MSPURSH810M-L		
Male-male extension connector					0.3 m	Y92E-M12MSM12MSPURSH80.3M-L		
					0.9 m	Y92E-M12MSM12MSPURSH80.9M-L		


Specifications

		Y92E-M12_8
Wire size		0.25 mm ²
Rated current		4 A
Rated voltage		30 VDC
Degree of protection		IEC 60529: IP67
Ambient temperature		-25°C to 80°C
Rated standards		AWM 21198
	Flame retardant	IEC 60332-2-2 CSA FT2
	Halogen free	IEC 60754-1
	RoHS	2002/95/EC


Dimensions

(Unit: mm)
Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

Y92E-M12_8 (female)

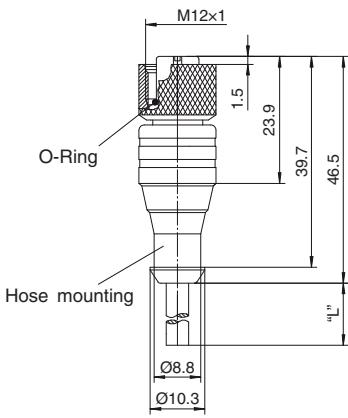

Y92E-M12_8 (male)

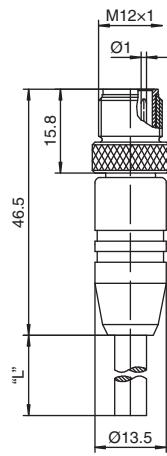

Pin arrangement

M12 8-pin (female)
1 = white 2 = brown 3 = green 4 = yellow 5 = grey 6 = pink 7 = blue 8 = red
M12 8-pin (male)
1 = white 2 = brown 3 = green 4 = yellow 5 = grey 6 = pink 7 = blue 8 = red

XS, Y92E

For demanding applications in drag chains or in the moving parts of robots, the robotic sensor connector family provides the bending and torsion performance required for reliable and long life operation.

- M8 and M12 brass female connectors
- suitable for frequently or constantly moving applications
- > 2 Mio drag chain bending performance PVC or PUR models
- > 5 Mio drag chain bending and > 10 Mio torsion performance PUR models




Ordering Information

Type	Size	Cable material	Bending performance (drag chain)	Torsion performance	Features	Shape	Cable length	Order code			
Sensor connector with open cable end and robotic cable	M8	PVC	> 2 Mio	(not specified)	4-wire		2 m	XS3F-M421-402-R			
							5 m	XS3F-M421-405-R			
	M12	PUR					2 m	XS3F-M422-402-R			
							5 m	XS3F-M422-405-R			
	M8	PUR					2 m	Y92E-M08PUR4S2M-L			
							5 m	Y92E-M08PUR4S5M-L			
	M12	PVC					2 m	Y92E-M08PUR4A2M-L			
							5 m	Y92E-M08PUR4A5M-L			
	Sensor connector with open cable end and high grade robotic cable	PUR					2 m	XS2F-D421-D80-F			
							5 m	XS2F-D421-G80-F			
							2 m	XS2F-D422-D80-F			
							5 m	XS2F-D422-G80-F			
							2 m	Y92E-M12PUR4S2M-L			
							5 m	Y92E-M12PUR4S5M-L			
							2 m	Y92E-M12PUR4A2M-L			
							5 m	Y92E-M12PUR4A5M-L			
							2 m	Y92E-M08PUR4S2M-R			
							5 m	Y92E-M08PUR4S5M-R			
							2 m	Y92E-M08PUR4A2M-R			
							5 m	Y92E-M08PUR4A5M-R			
							2 m	Y92E-M12PUR4S2M-R			
							5 m	Y92E-M12PUR4S5M-R			
							2 m	Y92E-M12PUR4A2M-R			
							5 m	Y92E-M12PUR4A5M-R			

Bending and torsion performance

The bending and torsion performance of the robotic sensor connectors has been tested using the below test methods.

1. Bending (drag chain)

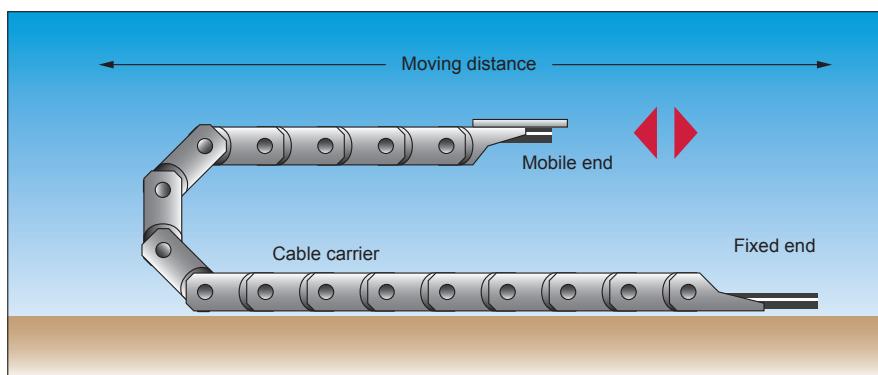


Cable carrier bending radius: approx. 9 x cable outer diameter

Movement speed: PVC: 120 m/min (max)

PUR: 200 m/min (max); max 5 m/s²

2. Bending (left - right)*1

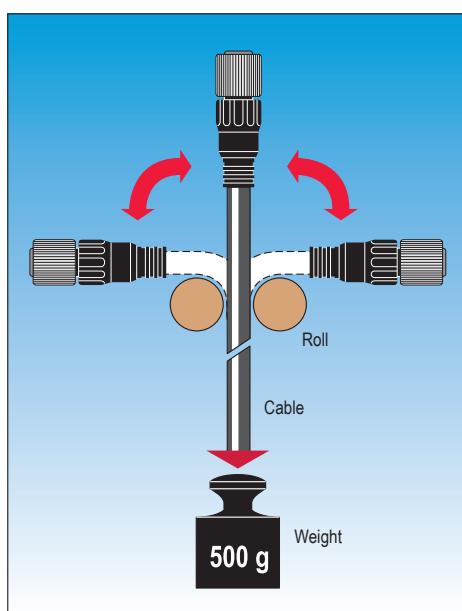


Bending angle: $\pm 90^\circ$

Bending speed: 35 cycles/min

Roll diameter: 60 mm

*1 For PVC models

3. Torsion

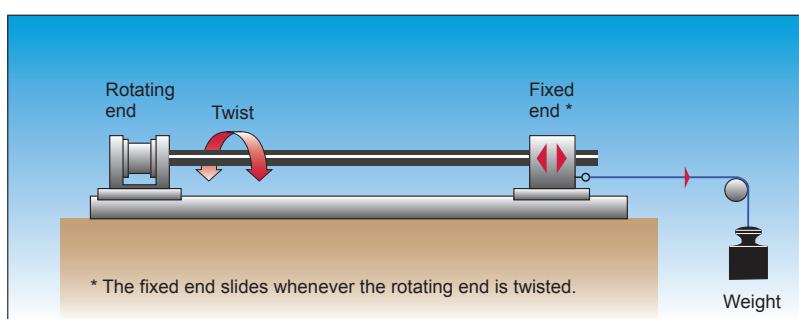



Torsion angle and length: PVC: $\pm 180^\circ$ over 0.5 m

PUR: $\pm 360^\circ$ over 1 m

Specifications

		Robotic PVC		Robotic PUR		High grade robotic PUR		
		XS3F-_R	XS2F-_F	Y92E-M-_L		Y92E-M-_R		
		M8	M12	M8	M12	M8	M12	
Wire size		0.25 mm ²	0.34 mm ²					
Rated current		1A	4A					
Rated voltage		125 VDC		30 VDC	240 VDC	30 VDC	240 VDC	
Degree of protection		IEC 60529: IP67						
Ambient temperature	Fixed	-25° to 70°C		-50°C to 80°C				
	Moving			-25°C to 80°C				
	Continuous drag chain operation			-25°C to 60°C		5°C to 60°C		
Rated standards	Style	-	AWM 2464	AWM 20549				
	Flame retardant	-	UL VW1 CSA FT4	IEC 60332-2-2 CSA FT2				
	Halogen free	-			IEC 60754-1			
	RoHS	2002/95/EC						

Pin arrangement


M8 4-pin	M12 4-wire
 1 = brown 2 = white 3 = blue 4 = black	 1 = brown 2 = white 3 = blue 4 = black 5 = n.c.

Dimensions


(Unit: mm)
Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

XS3F-_R

Straight Connectors

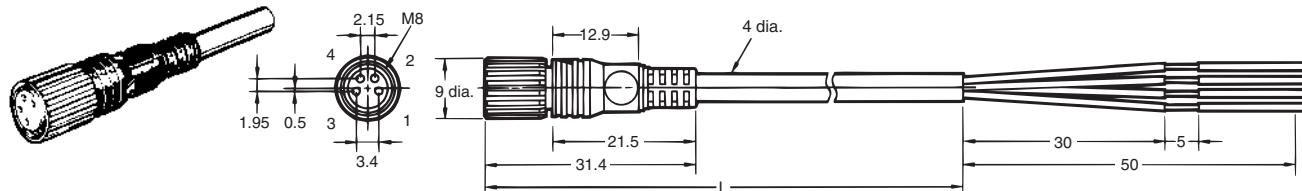




L-shaped Connectors

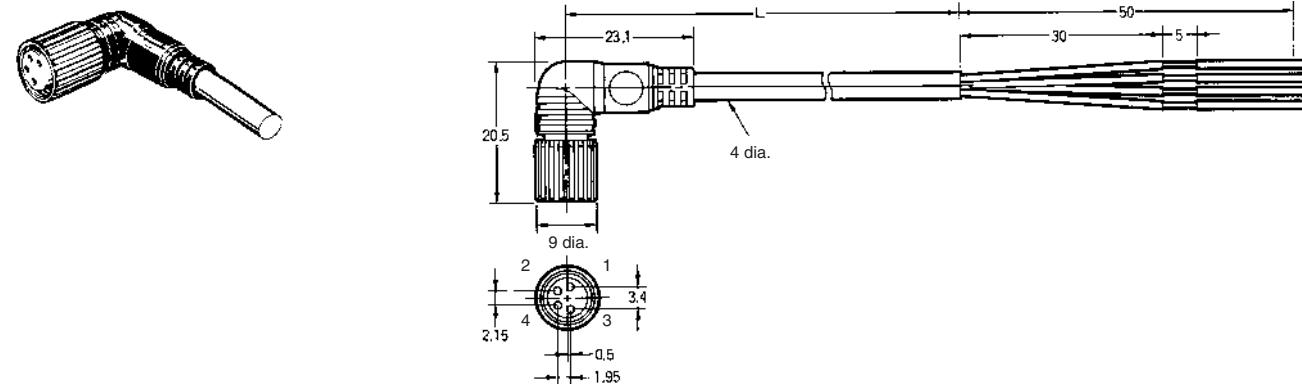



XS, Y92E

XS2F- -F

Straight Connectors

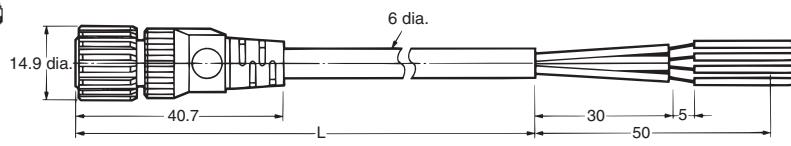


L-shaped Connectors

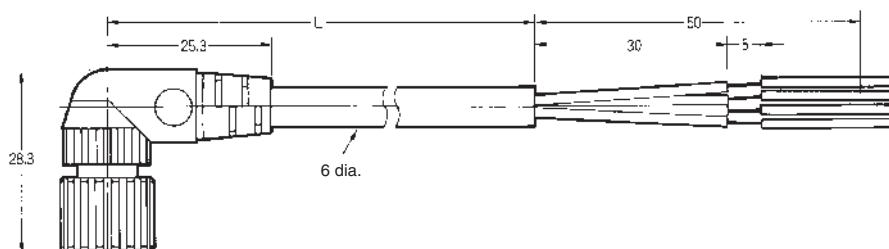


Y92E-M08

Straight Connectors


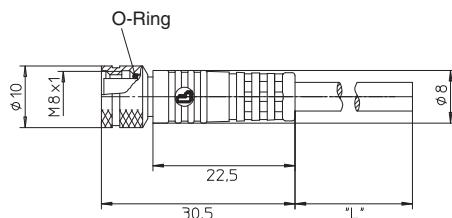


L-shaped Connectors




Y92E-M12

Straight Connectors

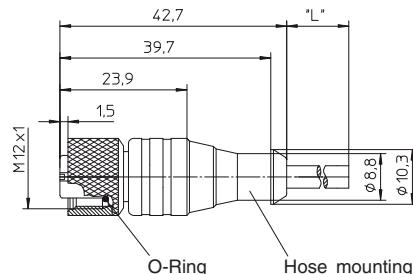

L-shaped Connectors

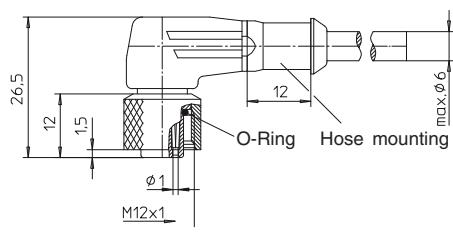

Y92E-S_PP

- Highest operational reliability
- Strong flexibility due to the product variety
- Support of global industry standards (UL, ECOLAB, etc.)
- Increasing efficiency caused by superior handling characteristics as well as the potential to decrease costs



Ordering information

Detergent and wash-down resistant models




Type	Size	Material		Features	Shape	Length (m) ¹	Order code			
		Nut	Cable							
Detergent resistant Wash-down	M8	SUS 316L	PP (Polypropylene)	3 pin	Angled	2	Y92E-S08PP3A 2M			
					5	Y92E-S08PP3A 5M				
					2	Y92E-S08PP3S 2M				
					5	Y92E-S08PP3S 5M				
				4 pin	Angled	2	Y92E-S08PP4A 2M			
					5	Y92E-S08PP4A 5M				
					2	Y92E-S08PP4S 2M				
					5	Y92E-S08PP4S 5M				
	M12				Angled	2	Y92E-S12PP4A 2M			
					5	Y92E-S12PP4A 5M				
					2	Y92E-S12PP4S 2M				
					5	Y92E-S12PP4S 5M				

¹ For different cable length please contact your Omron representative

Specifications

Rated current	4 A
Rated voltage	M8: 60 VDC M12 4-wire: 250 VDC
Degree of protection	IP67 / IP68 / IP69K (IEC 60529)
Ambient temperature	-30 to 90°C
Approvals	UL-File Nr. E315587; ECOLAB

Pin arrangement

M8 3 pin	M8 4 pin	M12 4 pin
 1 = brown 3 = blue 4 = black	 1 = brown 2 = white 3 = blue 4 = black	 1 = brown 2 = white 3 = blue 4 = black 5 = n.c.


Materials

Pin block	PP, white (Polypropylene)
Contacts	Cu/Au, 0.3 µm gold plating
Fixture	Stainless steel
Cover	PP (Polypropylene)
O-ring	EPDM
Cable sheath	TPE (Thermoplastic elastomers)


Y92E-S_PP

Dimensions

Y92E-S08PP

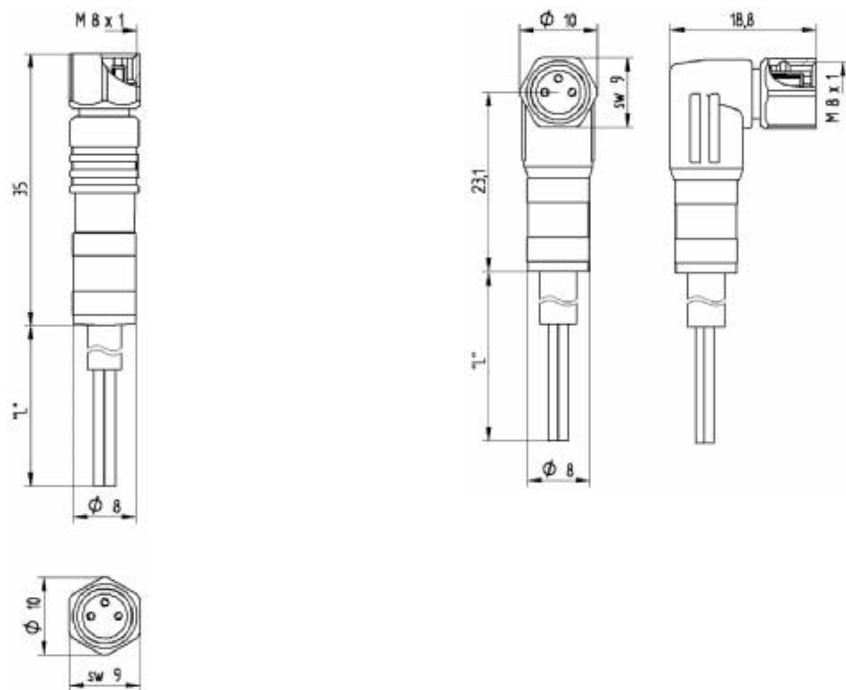


Y92E-S12PP

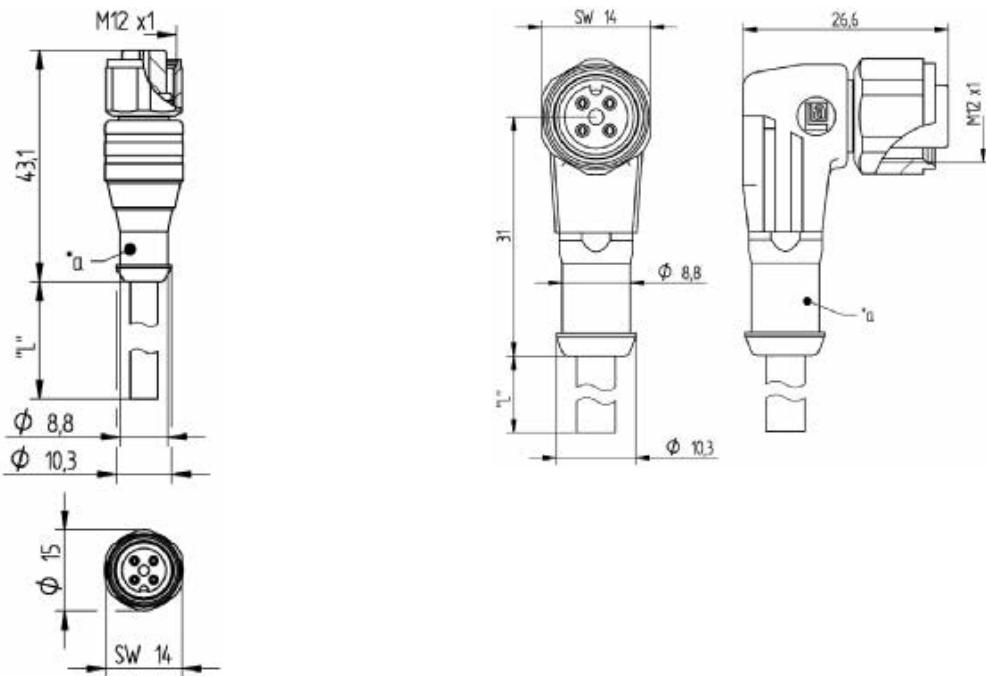

Wiring Diagram (M8 and M12)

Contact No.

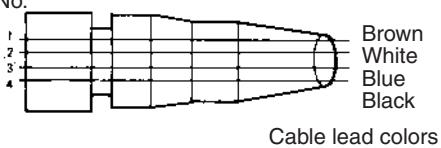

Cable lead colors

Round Water-resistant Smartclick Connectors That Reduce Installation Work

- A newly developed lock mechanism that is compatible with round M12 connectors.
- Simply insert the Connectors, then turn them approximately 1/8 of a turn to lock.
- A positive click indicates locking.
- Features the same degree of protection (IP67) as M12 connectors.
- A full line-up of models is planned.
- Connectors with Cables are UL approved.



Ratings and Specifications

Rated current	4 A
Rated voltage	250 VDC
Contact resistance (connector)	40 mΩ max. (20 mV max., 100 mA max.)
Insulation resistance	1,000 MΩ min. (at 500 VDC)
Dielectric strength (connector)	1,500 VAC for 1 min (leakage current: 1 mA max.)
Degree of protection	IP67 (IEC60529)
Insertion tolerance	50 times min.
Lock strength	Tensile: 100 N/15 s, Torsion: 1 N·m/15 s
Cable holding strength	Tensile: 100 N/15 s, Torsion: 1 N·m/15 s (for cable diameter of 6 mm) *2
Lock operating force	0.1 to 0.25 N·m
Ambient operating temperature range	-25 to 70°C
Ambient humidity range	20% to 85%
Number of pressure-weld repairs *1	10 times max. (Limited to the same external diameter and wire diameter.)

*1. Only XS5C/G (IDC models)

*2. Refer to product specifications for details.


XS5W

Materials and Finishes

Item	Model	XS5F/H/W	XS5R	XS5M/P	XS5C/G (Crimping, Soldering)	XS5C/G (Screw-on)	XS5C/G (IDC models)
Contacts	Material	Phosphor bronze	Phosphor bronze or Brass	Phosphor bronze	Brass	Phosphor bronze or Brass	Phosphor bronze
	Finish	Nickel base, 0.4- μ m gold plating					
Fixtures		Nickel-plated zinc alloy					
Fixtures (Lock) *		Stainless					
Pin block		PBT resin (UL94V-0)					
O-ring		Rubber					
Overmolding/Cover		Soft PBT resin (UL94V-0)	---	---	PBT resin (UL94V-0)		
Cable	Fire-retardant, Robot cable	UL AWM2464 CL3, 6 mm dia., AWG20 (0.5mm ²) Structure: 0.08 mm/110 wires	---	---			
	Oil-resistant polyurethane cable	6 mm dia. AWG20 (0.5mm ²) Structure: 0.12 mm/45 wires	---	---			
	Spatter-resistant Cable	6.6 mm dia. AWG20 (0.5mm ²) Structure: 0.08 mm/100 wires	---	---			
Seal resin		---	Epoxy resin (UL94V-0)	---			
Power supply wires		---	UL1007 AWG20	---			

*Only plug

Connector Pinout Diagram (from Mating Side)

Item	No. of poles	4 poles
DC type	Male (plug) contacts	
	Female (socket) contacts	

Connection Combinations

OMRON model No.		Smartclick Plug Connectors	M12 Plug Connectors
		XS5H, XS5G, XS5W (plug side), XS5R (plug side), XS5M	XS2H, XS2G, XS2W (plug side), XS2R (plug side), XS2M
Smartclick Socket Connectors	XS5F, XS5C, XS5W (socket side), XS5R (socket side), XS5P	◎	○
M12 Socket Connectors	XS2F, XS2C, XS2W (socket side), XS2R (socket side), XS2P	○	○

Smartclick is a registered trademark of the OMRON Corporation.

◎ : Connected by twisting.

○ : Connected by screwing.

Note: The XS□M and XS□P cannot mate with each other.

XS5W

Connectors Connected to Cable, Socket and Plug on Cable Ends




- Fire-retardant, Robot cable
- Oil-resistant Polyurethane Cable
- Spatter-resistant Cable

XS5W-D42□-□81-F
XS5W-D42□-□81-P
XS5W-D421-□81-SA


Dimensions

(Unit: mm)


Straight/straight

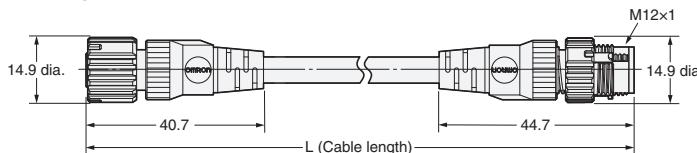


Angled/angled

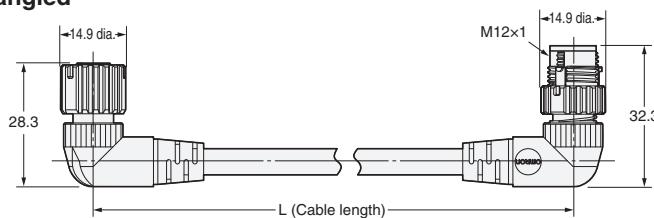

Straight/angled

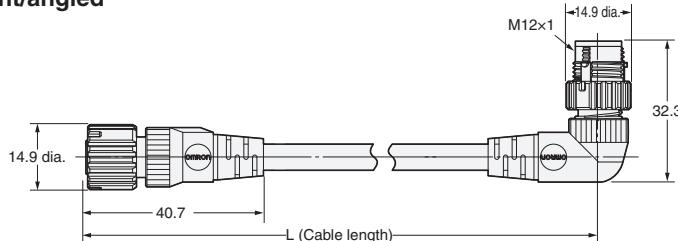


Angled/straight

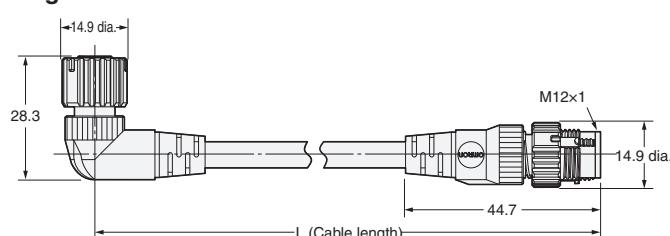

Note: Oil-resistant Polyurethane Cables (XS5W-D42□-□81-P) and Spatter-resistant Cable (XS5W-D421-□81-SA) have black covers.
Fire-retardant, Robot cable (XS5W-D42□-□81-F) have warm gray covers.

Wiring Diagram for 4 Cores

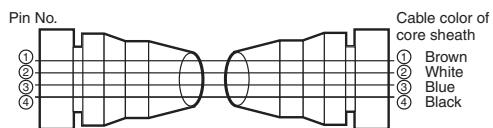

XS5W

Model Number Legend

XS5W-D42□-□81-□□

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

Use this model number legend to identify products from their model number. When ordering, use a model number from the table in *Ordering Information*.

1. Type

W: Connectors connected to cable, socket and plug on cable ends

2. Mating Section Form

D: DC

3. Connector Poles

4: 4 poles

4. Contact Plating

2: 0.4- μ m gold plating

5. Cable Connection Direction

1: Straight/straight

2: Angled/angled

3: Straight (Socket)/angled (Plug)

4: Angled (Socket)/straight (Plug)

6. Cable Length

C: 1 m

G: 5 m

D: 2 m

J: 10m

E: 3 m

7. Connections

8: ① Brown, ② White, ③ Blue, ④ Black (Numbers inside circles are terminal numbers)

8. Connectors on One End/Both Ends

1: Both ends

9. Cable Specifications

F: Fire-retardant, Robot cable

P: Oil-resistant Polyurethane Cable

SA: Spatter-resistant Cable

Ordering Information

Cable specifications	Cable length L (m)	Cable outer diameter (mm)	Straight/straight	Angled/angled	Minimum order	UL	
			Model				
Fire-retardant, Robot cable	1	6	XS5W-D421-C81-F	---	10	Yes	
	2		XS5W-D421-D81-F	XS5W-D422-D81-F	5		
	3		XS5W-D421-E81-F	---			
	5		XS5W-D421-G81-F	XS5W-D422-G81-F			
	10		XS5W-D421-J81-F	---	1		
Oil-resistant Polyurethane Cable	2	6.6	XS5W-D421-D81-P	---	5	---	
	5		XS5W-D421-G81-P	---			
	10		XS5W-D421-J81-P	---	1		
Spatter-resistant Cable	2	6.6	XS5W-D421-D81-SA	---	5	---	
	5		XS5W-D421-G81-SA	---			
Cable specifications	Cable length L (m)	Cable outer diameter (mm)	Straight (Socket)/angled (Plug)	Angled (Socket)/straight (Plug)	Minimum order	UL	
			Model				
Fire-retardant, Robot cable	2	6	XS5W-D423-D81-F	XS5W-D424-D81-F	5	Yes	
	5		XS5W-D423-G81-F	XS5W-D424-G81-F			

Ordering information

Type	Size	Material		Features	Shape	Length (m)	Order code
		Nut	Cable				
Twist & Click ^{*1}	M12	Brass	PVC ^{*2}	For standard 4 pin or Omron Smartclick connectors	Angled	2	XS5F-D422-D80-F
					Angled	5	XS5F-D422-G80-F
				Straight	2	XS5F-D421-D80-F	
					5	XS5F-D421-G80-F	


^{*1} The XS5F connectors can be attached to standard M12 plug connectors (screw-fix) and to XS5 plug connectors (twist & click). For details on the twist & click locking mechanism refer to XS5 data sheet.

^{*2} For PUR models replace -F by -P in the order code

Specifications

Rated current	4A
Rated voltage	125 VDC, 250 VAC
Degree of protection	IP67 (IEC 60529)
Ambient temperature	-25°C to 70°C


Pin arrangement

M12 4 poles	
	1 = brown 2 = white 3 = blue 4 = black 5 = n.c.

Materials

Pin block	PBT resin (UL94V-0)
Contacts	Phosphor bronze/nickel base, 0.4 µm gold plating
Fixture	Zinc alloy/nickel plated
Cover	Polyester elastomer (UL94V-0)
O-ring	Rubber

Dimensions

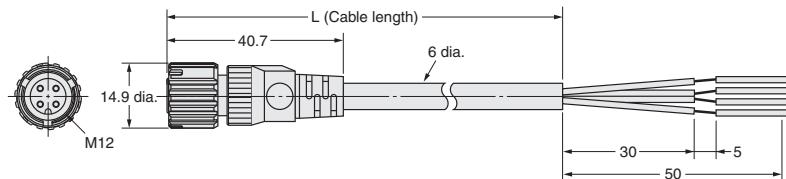

XS2C/G, XS5C/G, Y92E-_-conf







Ordering information

Type	Size	Material Nut	Features		Shape	Order code	
Plug (male)	M8	Polyester elastomer	3 pin		straight	Y92E-MM08PVC3Sconf-L	
			4 pin			Y92E-MM08PVC4Sconf-L	
			4 pin	IDC	straight	XS5G-D418	
				crimp		XS2G-D4C3	
				solder	angled	XS2G-D423	
				solder		XS2G-D424	
	M12		5 pin	screw fix	straight	XS2G-D5S1	
			angled	XS2G-D5S2			
			4 pin twist & click (for 4-5 mm cables)		straight	XS2G-D4S3	
					angled	XS2G-D4S4	
			3 pin	screw fix	straight	Y92E-M08PVC3Sconf-L	
			4 pin		straight	Y92E-M08PVC4Sconf-L	
Connector (female)	M8	Polyester elastomer	4 pin	IDC	straight	XS5C-D418	
				crimp		XS2C-D4C3	
				solder	angled	XS2C-D423	
				crimp		XS2C-D4C4	
				solder	straight	XS2C-D424	
	M12		5 pin	screw fix	straight	XS2C-D5S1	
			XS2C-D5S2				

Specifications

	Y92E	XS2C/G, XS5C/G
Rated current	4 A	
Rated voltage	36 VDC	125 VDC, 250 VAC
Degree of protection	IP67 (IEC60529)	
Ambient temperature	-25°C to 70°C	

Pin arrangement

M8		M12			
Plug	Connectors	Plug		Connectors	
4 pin	4 pin	4 pin	5 pin	4 pin	5 pin
					

4 pin: 1 = brown
2 = white
3 = blue
4 = black
5 = n.c.


5 pin: 1 = brown
2 = white
3 = blue
4 = black
5 = green / yellow

Materials

	Y92E	XS2C/G, XS5C/G
Pin block	PVC	PBT resin (UL94V-0)
Contacts	CuSn, nickel base, 0.3 µm gold plating	Brass/nickel base, 0.4 µm gold plating
Fixture		Brass/nickel base
Cover	PVC	PBT resin (UL94V-0)
O-ring	FKM	Rubber



Dimensions**Plugs (male)**

XS5G-D418 (IDC Model, Straight)


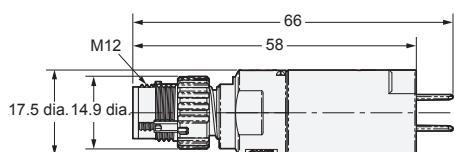


XS2G-D4C (Crimping Model, Straight),


XS2G-D42 (Soldering Model, Straight)

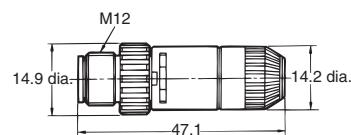




XS2G-D5S1 (Screw-on model, Straight)

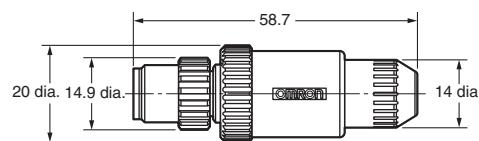

XS2G-D42 (Soldering Model, L-shaped)





XS2G-D5S2 (Screw-on model, angled)

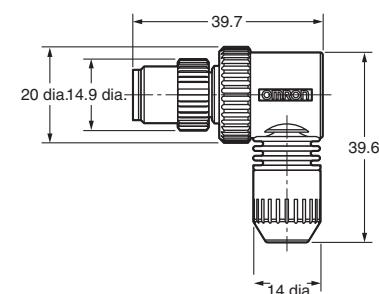




XS2C/G, XS5C/G, Y92E-_conf

Connectors (female)



XS5C-D418 (IDC Model, Straight)

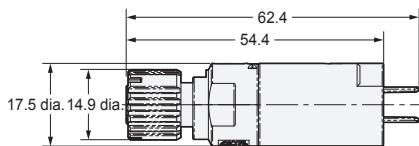

XS2C-D4C□ (Crimping Model, Straight),
XS2C-D42□ (Soldering Model, Straight)






XS2C-D5S1 (Screw-on model, straight)

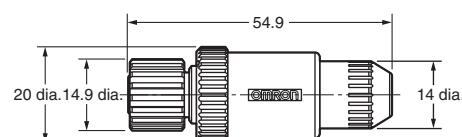



XS2C-D4C□ (Crimping Model, L-shaped)

XS2C-D42□ (Soldering Model, L-shaped)




XS2C-D5S2 (Screw-on model, angled)

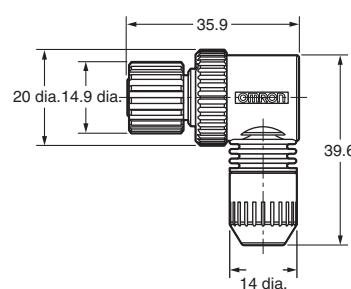

Simple Wiring of Sensor Actuators

- Greatly reduce wiring in combination with the Smartclick XS5.
- Insert the connector and turn 1/8 of a turn to lock the connectors.
- Higher rated current to enable output applications.
- Use previous M12 screw connectors.

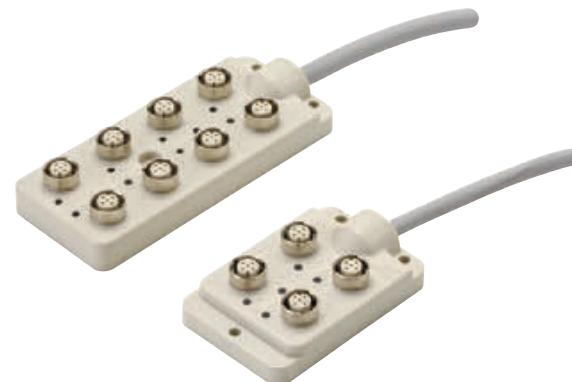

 Smartclick

Specifications

Rated current	4 A/port, 12 A/Box (power line)
Rated voltage	10 to 30 VDC
Contact resistance (connector)	40 mΩ max. (20 mV max., 100 mA max.)
Insulation resistance	1,000 MΩ min. (at 500 VDC)
Dielectric strength (connector)	500 VAC for 1 min (leakage current: 1 mA max.)
Degree of protection	IP67 (IEC60529)
Insertion tolerance	50 times min.
Lock strength	Pulling: 100 N/15 s, Twisting: 1 N·m/15 s
Cable holding strength	100 N/15 s
Lock operating force	0.1 to 0.25 N·m
Ambient temperature range	Operating: -25 to 70°C

Materials and Finish

Item	Materials/finish
Contacts	Brass/nickel base, 0.4-μm gold-plating
Fixtures	Nickel-plated zinc alloy
Case	PBT resin (UL94V-O), light gray
Bushing	Rubber
O-ring	Rubber
PCB	Glass epoxy board
Sealing resin	Urethane resin (UL94V-0)
Cable	UL AWM2464 Signal lines: AWG22 Power and ground lines: AWG18

Connection Combinations

OMRON model no.	Twist-and-Click Plug Connectors	M12 Plug Connectors
	XS5H, XS5G, XS5W (plug end), XS5R (plug end)	XS2H, XS2G, XS2W (plug end), XS2R (plug end)
Connector Terminal Box XW3D	◎	○

◎: Connected by  Smartclick.
○: Connected by screwing.

 Smartclick is a registered trademark of the OMRON Corporation.

XW3D

Ordering Information

Sensor type and wiring		3-wire DC NPN/2-wire DC 3-4	2-wire DC 1-4/without polarity 3-4	3-wire DC PNP/2-wire DC 1-4
Actuator wiring		Actuator wiring 1-4	—	Actuator wiring 3-4
No. of ports	No. of I/O	Model		
4	4	XW3D-P455-G11	XW3D-P452-G11	XW3D-P453-G11
8	8	XW3D-P855-G11	XW3D-P852-G11	XW3D-P853-G11
4	8	XW3D-P458-G11	—	XW3D-P457-G11

Note 1. "1-4" and "3-4" are the connector pin numbers that are wired.

2. All cables are 5 m long.

Waterproof Cover (Sold Separately)

Appearance	Model	No. per box	Material
	XS5Z-11	50	PBT
	XS2Z-22	50	Brass with Ni plating


Note 1. The XW3D/XW3B/XW3A comes with a dust cover. If IP67 degree of protection is required, use the XS5Z-11 or XS2Z-22 (sold separately).

2. The XS2Z-22 connection is threaded.


Dimensions

(Unit: mm)


XW3D-P45□-G11 (Model with Four Ports)

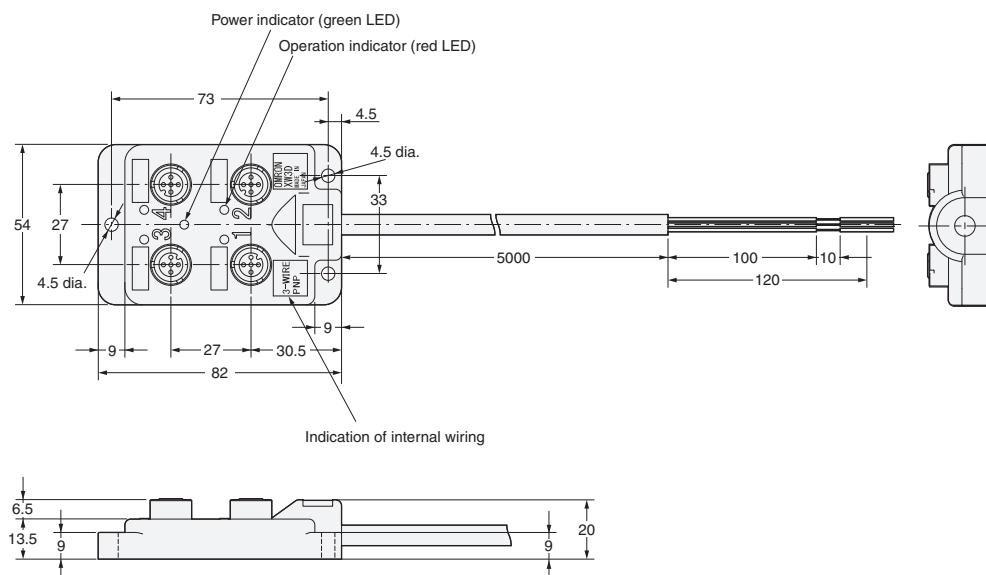

XW3D-P85□-G11 (Model with Eight Ports)

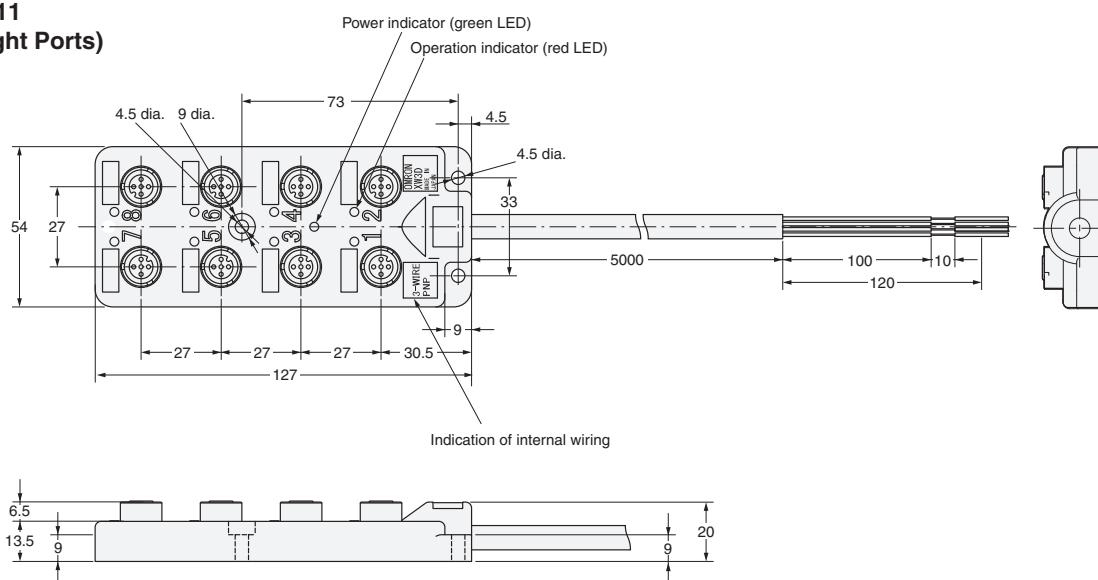


XW3D-P457-G11
(Model with Four Ports and Eight I/O)

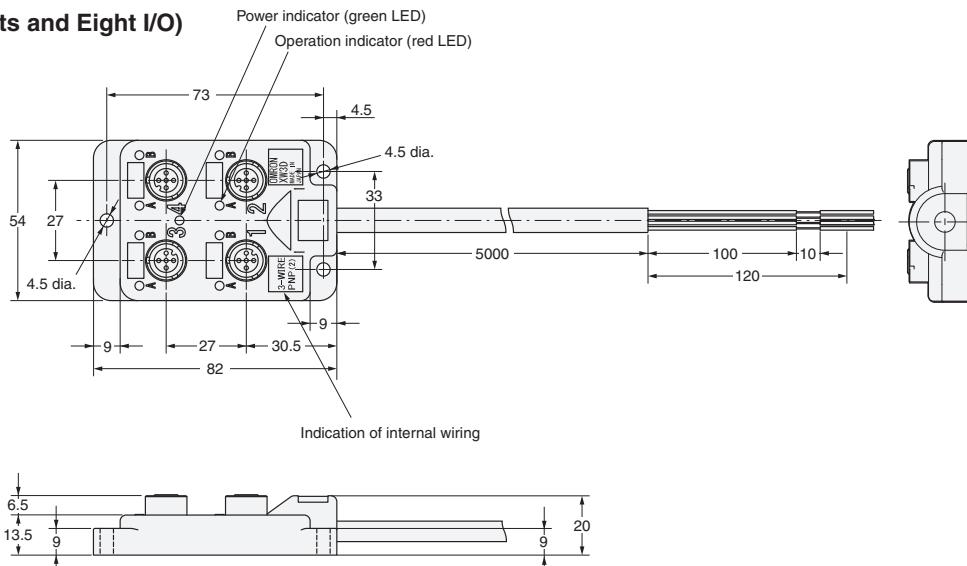

Wiring Diagrams


Models with One I/O and One Port

XW3D-P□55-□11
for 3-wire NPN,
2-wire DC (without polarity 3-4),
and Actuator (1-4)

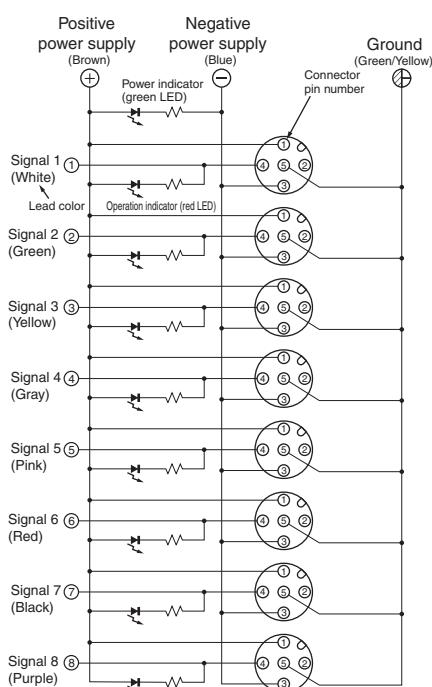


XW3D-P□52-□11
for 2-wire DC
(polarity 1-4, without polarity 3-4)

Note: Cannot be used with NPN-type Photoelectric and Proximity Sensors. Cannot be used with Proximity Sensors with polarity 3-4.

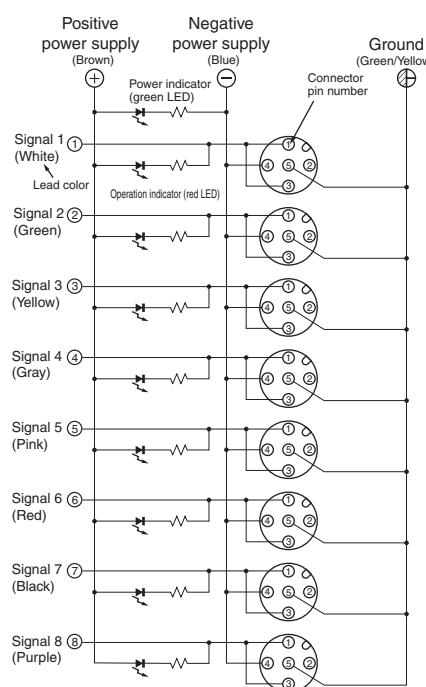

XW3D-P□53-□11
for 3-wire PNP,
2-wire DC (with polarity 1-4),
and Actuator (3-4)

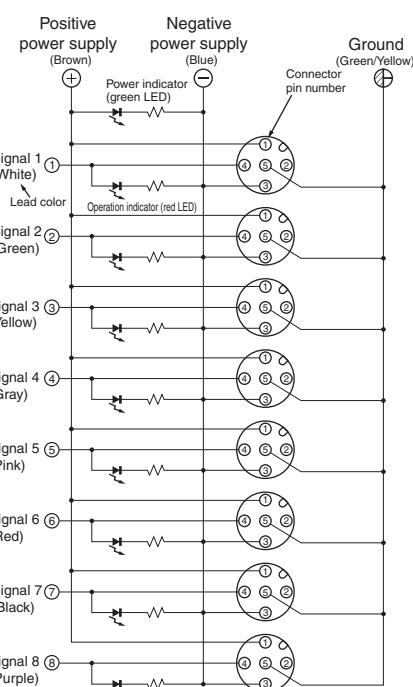

Note 1. The above wiring diagrams are for eight-port use.

2. Figures in parentheses indicate lead colors.


3. The expression "white/red" means white and red stripes.

4. Here, "1-4" and "3-4" are pin numbers.

5. Contact numbers 5 through 8 in the above diagrams do not exist on Terminal Boxes with four ports. The lead colors for signals 1 through 4, power supply, and ground are the same.


Models with Two I/O and One Port

XW3D-P458-G11
for 3-wire NPN and
Actuator (1-4 or 1-2)

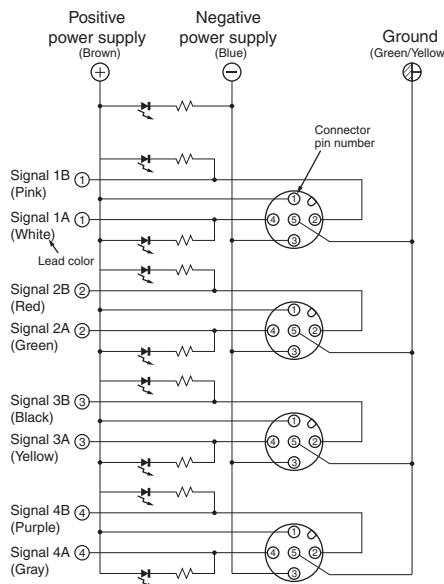


Note: Colors given in the connection diagram are lead colors.

XW3D-P457-G11
for 3-wire PNP and
Actuator (3-4 or 3-2)

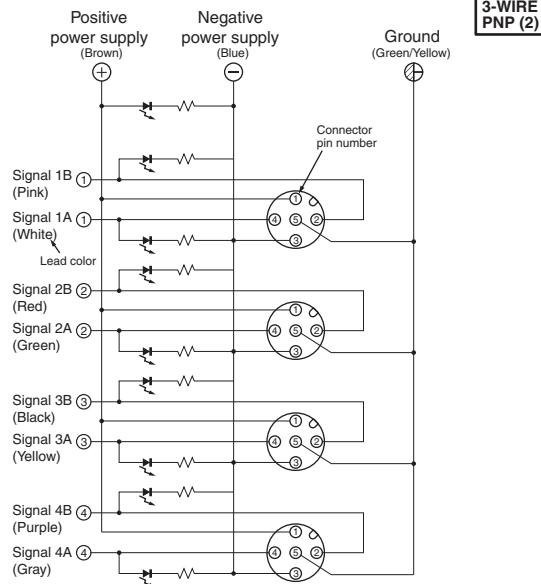

Mounting Dimensions

(Unit: mm)

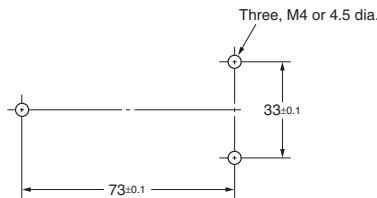

Note: The mounting dimensions are the same regardless of the number of ports.

Safety Precautions

Precautions for Correct Use

Do not use the Connectors in an atmosphere or environment that exceeds the specifications.

Connector Connection and Disconnection

- Mate the connectors according to the procedure.
- When mating Connectors, be sure to insert the plug all the way to the back of the socket before attempting to lock the Connectors.
- Do not use tools of any sort to mate the Connectors. Always use your hands. Pliers or other tools may damage the Connectors.
- When mating the Connectors to XS2 or other M12 Connectors, tighten the lock by hand to a torque of 0.39 to 0.49 N·m.
- Confirm in the catalog that sensors and actuators are applicable before using them.
- Always turn OFF the power supply before connecting or disconnecting connectors.
- Do not touch the mating surface of the connectors with wet hands.
- Wipe away any water around the connectors.
- Do not allow metal scraps or dust to enter the mating section.

Cable Lead Polarity

- Connect the cables leads using the correct polarity (Blue: Negative power supply, Brown: Positive power supply).
- If the polarity is not correct, the load may not operate or the operation indicator may not light.
- Always connect a load to the signal lines to operate a sensor or actuator.

Applicable Connectors

- Always mount a Waterproof Cover (XS2Z-22) or Dust Cover (XS2Z-15) to any unused connector on the Connector Terminal Box.

Power Supply and Operation Indicators

- The power supply indicator will be lit green while power is being supplied. The operation indicator will be lit red while the sensor or actuator is operating.
- The XW3D is for a DC sensor or actuator. Do not use it for an AC sensor or actuator.
- Connector Terminal Boxes are available with either 2-wire or 3-wire internal connections, as indicated on the case.

3-WIRE
NPN

2-WIRE

3-WIRE
PNP

3-WIRE
NPN (2)

3-WIRE
PNP (2)

Fiber amplifier connectors

E3X-CN

Ordering information

Type	Size	Features	Order code
Fiber amplifier connector	Special connector 17,8x10x15,1	4 wire; 2 m PVC cable	E3X-CN21
		3 wire; 2 m PVC cable	E3X-CN11
		2 wire slave cable; 2 m PVC	E3X-CN22 ^{*1}
		1 wire slave cable; 2 m PVC	E3X-CN12 ^{*1}
		M8 4-pin plug with 30 cm PVC cable	E3X-CN21-M3J-2 0.3M
		M12 4-pin plug with 30 cm PVC cable	E3X-CN21-M1J 0.3M

^{*1} Slave connectors can be used to reduce wiring effort. The setup requires 1 master amplifier with the slave amplifiers directly mounted attached. The power supply is then provided by the master amplifier via the clipped on slave connectors. For 4-wire masters use 2-wire slaves and for 3-wire masters 1-wire slaves.

Specifications



Rated current	2.5 A
Rated voltage	50V
Degree of protection	IP50 (EC 60529)
Ambient temperature	Groups of 1 or 2 amplifiers: -25 to 55°C
	Groups of 3 to 10 amplifiers: -25 to 50°C
	Groups of 11 to 16 amplifiers: -25 to 45°C

Materials

Housing	Polybutylene terephthalate (PBT)
Contacts	Phosphor bronze/ gold plated/ nickel

Pin arrangement

	Connector	Cable colour	
M8	1	brown	+
	2	orange/white	Output 2 or ext. input
	3	blue	-
	4	black	Output 1
		pink	Ext. Input





E3X-CN

Dimensions

Master connectors

E3X-CN21/E3X-CN11

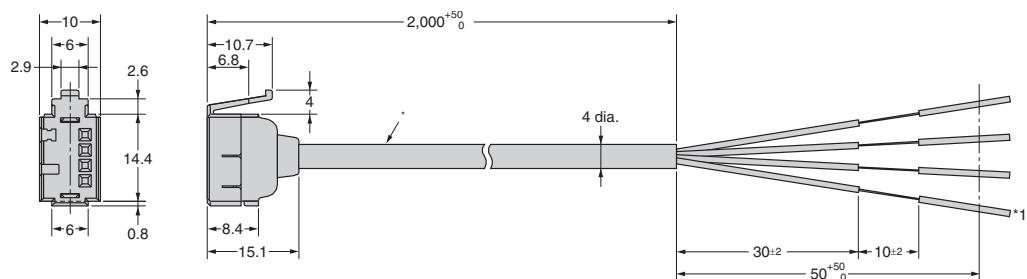


* E3X-CN21: 4-dia. vinyl-insulated round cable with 4 conductors (Conductor cross section: 0.2 mm², Insulator diameter: 1.1 mm)

^{*}1 Only E3X-CN21

Slave connectors

E3X-CN22/E3X-CN12

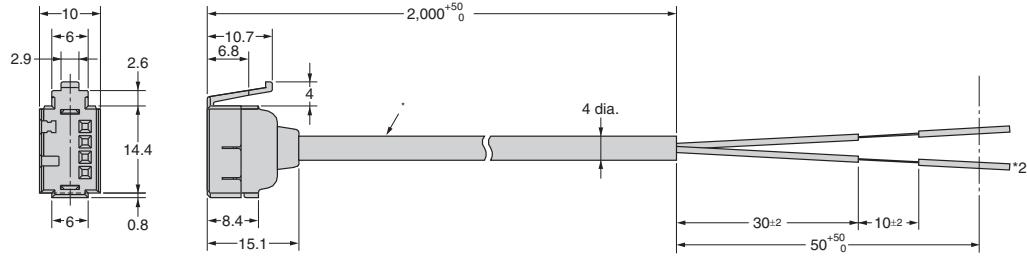

* E3X-CN21: 4-dia. vinyl-insulated round cable with 4 conductors (Conductor cross section: 0.2 mm², Insulator diameter: 1.1 mm)

^{*}2 Only E3X-CN22

Photomicrosensor connectors

EE-1

Ordering information

Type	Size	Features	Applicable sensors	Order code
Pin connector for soldering	13x4x10.8	For dark on	EE-SX47/67	EE-1001
		For light on		EE-1001-1
Cable connector	13x4x13.5	standard cable		EE-1010 2M
		robotic cable		EE-1010-R 2M
	10x5.8x8	standard cable	EE-SX97	EE-1017 1M
		robotic cable		EE-1017-R 1M
Cable connector for EE-SX91 pigtail versions	10x5.8x8	robotic cable	EE-SX91	EE-1016-R

Specifications

Rated voltage	5 to 24 VDC
Degree of protection	IP50 (IEC 60529)
Ambient temperature range	operating: -25 to 55°C storage: -30 to 80°C

Material







	EE-1001	EE-1010/EE-1016	EE-1017
Housing	Nylon		
Contacts	Phosphor bronze		
Cable	-	PVC 2 m	PVC 1 m (3 m are available on request)

Pin arrangement


	EE-1001, EE-1010		EE-1016		EE-1017	
1	+	Brown	+	Brown	+	Brown
2	L	Pink	output 2	White	1	Black
3	out	Black	-	Blue	2	White
4	-	Blue	output 1	Black	-	Blue

Note: For the connector EE-1001-1 the pins 1(+) and 2 (L) are short circuited

Dimensions

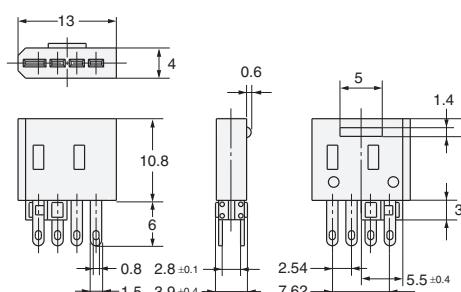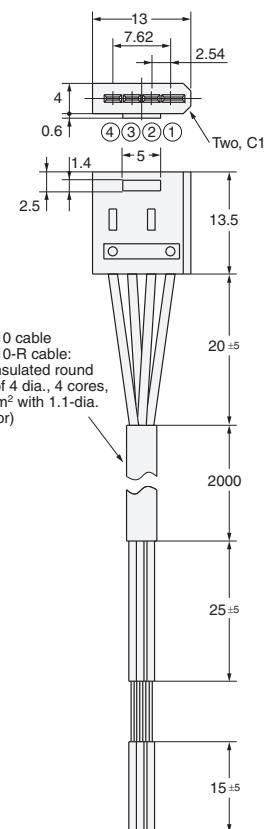Connector
EE-1001Connector
(short-circuited between positive (+) and L
terminals)
EE-1001-1Connector with Cable
EE-1010Connector with Robot Cable
EE-1010-RConnector with Robot Cable
EE-1016-R

Robot cable of 2.8 dia., 4 cores,
(0.15 mm² with 0.8-mm dia.insulator);
Standard length: 2 m

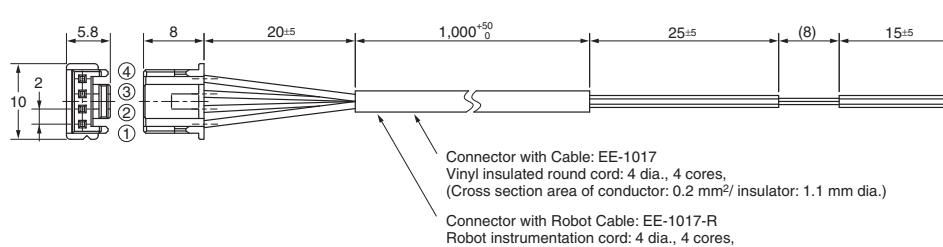Connector with Robot Cable
EE-1017-R

Name	Model	Appearance	
Cable connectors with plugs (open end or connector end)	XS2W Plug connectors (Connector end)		
	XS2H Plug connectors (Open end)		
Connector Assembly Accessories (Crimping, Soldering, or Screw-on)	XS2F Crimp Tool (for Crimping Connectors)		
	XS2U Crimping pin (for XS2G/XS2C)		
	XW4Z Screwdriver (for Screw-on Connectors)		
Panel-mounting Connectors	XS2P Sockets (M12) XS3P Sockets (M8)		
	XS2M Plugs (M12) XS3M Plugs (M8)	Flange-mounting Plugs	
		Screw-mounting Plugs	
T-Joints and Y-Joints Used for branching and for daisy-chain connections.	XS2R T-Joint/Y-Joint Plug/Socket Connectors (M12) XS3R Y-Joint Plug/Socket Connectors (M8)	T-Joints	
		Y-Joints	
Dust covers Used to protect unused connector ports	XS2Z (M12) XS3Z (M8)	Connector plugs	
		Connector covers	

Note: For details on these products, contact your Omron representative

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

Cat. No. E96E-EN-05

In the interest of product improvement, specifications are subject to change without notice.

OMRON EUROPE B.V.

Wegalaan 67-69,
NL-2132 JD, Hoofddorp,
The Netherlands
Phone: +31 23 568 13 00
Fax: +31 23 568 13 88
industrial.omron.eu