

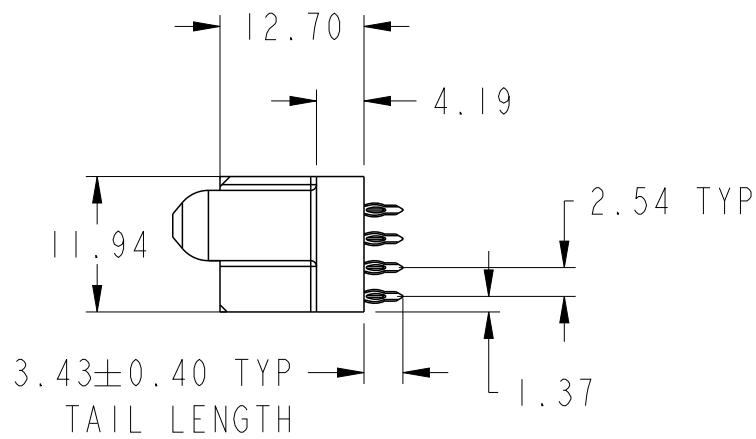
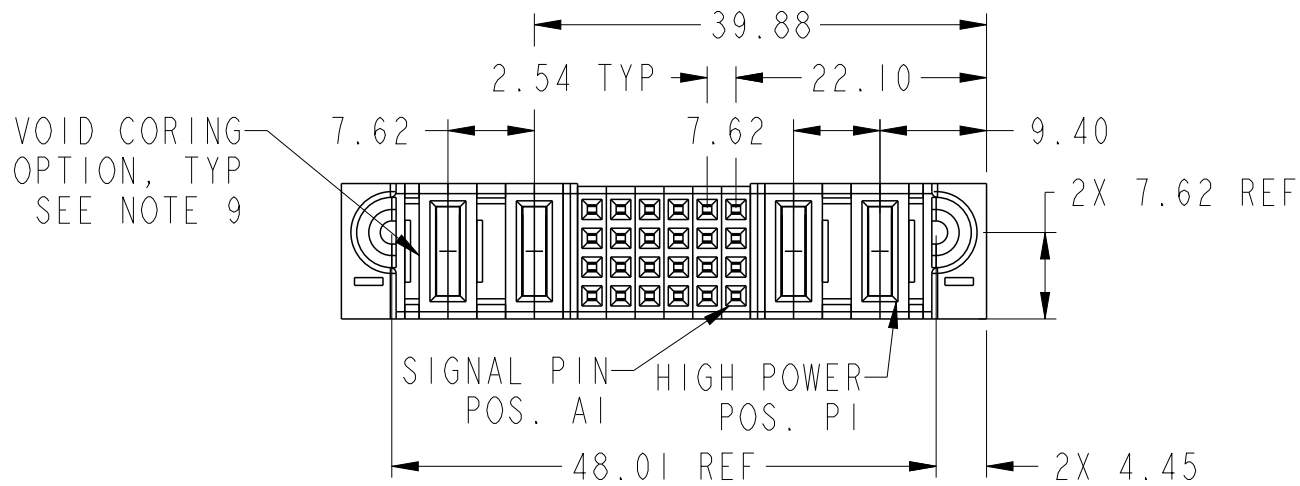


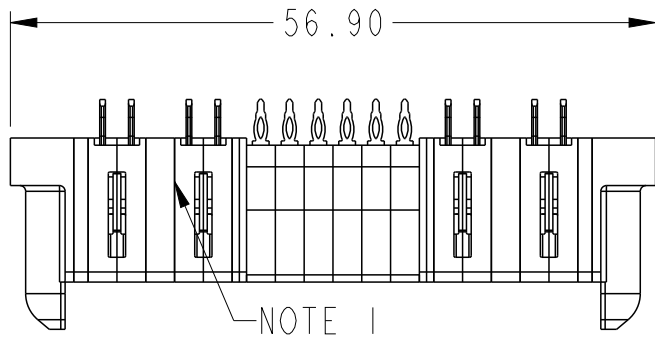





PRODUCT NUMBER SEE SHEET 2

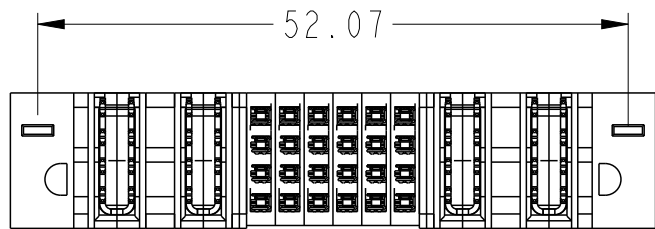

spec ref				dr		Sunny2 Liu	2017/06/02	projection		MM		size		A3	scale		3:2				
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Sunny2 Liu	2017/07/04					ecn no				-			
ISO 406						chr		Fancy Zhang	2017/07/03												
ISO 1101						appr		Pei-Ming Zheng	2017/07/04					product family				PowerBlade+	rel level		Released
surface  ISO 1302		linear		0.X	±0.5	Amphenol FCi		title 2ACP + 24S + 2ACP VT PF RECEPTACLE				dwg no 10106123-4006001				rev A					
				0.XX	±0.25																
				0.XXX	±0.10																
		angular		0°	±2°					cat. no.				Product - Customer Drw				sheet 1 of 3			

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND
END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR
OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT
TO PRODUCT FUNCTION.
- 10) THIS PRODUCT MEETS EUROPEN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 11) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr		Sunny2 Liu	2017/06/02	projection		MM		size		A3	scale		1:1					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Sunny2 Liu	2017/07/04					ecn no				-				
ISO 406						chr		Fancy Zhang	2017/07/03					rel level				Released				
ISO 1101						appr		Pei-Ming Zheng	2017/07/04					product family				PowerBlade+				
surface			linear	0.X	±0.5	Amphenol FCi		title				2ACP + 24S + 2ACP				dwg no		10106123-4006001		rev		A
				0.XX	±0.25																	
				0.XXX	±0.10																	
ISO 1302		angular	0°	±2°			cat. no.				Product - Customer Drw				sheet 3 of 3							