




mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		 <a href="http://www.fciconnect.com">www.fciconnect.com</a>	
ltr	ecn no	dr	date	linear	.X ± 0.30				projection 	title MINI USB B-TYPE SMT RECEPTACLE	
H	T06-0074	AC	4/10/06		.XX ± 0.20						
J	T06-0137	AC	7/18/06		.XXX ± 0.10						
K	T06-0201	AC	12/14/06	angles	0° ±2°					product family 511 size dwg no	
L	T07-1002	JH	1/5/07	dr	JASON HSU	12/27/10		scale N/A			
M	T10-0095	JH	12/27/10	enrg	JASON HSU	12/27/10					
N	T-004667	JH	7/27/11	chr	GARY HSIEH	12/27/10					
				appd	JOSEPH HSIA	12/27/10		A4		10033526	
sheet index		revision		N	N						
		sheet		1	2						

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

PROD NO  
SEE NOTES



NOTES:

- 1.MATERIAL:  
HOUSING: THERMOPLASTIC. UL 94V-0 RATED, COLOR: BLACK.  
CONTACT: COPPER ALLOY.  
SHELL: COPPER ALLOY  
MYLAR: KAPTON TAPE.
- 2.FINISH:  
CONTACT: UNDERPLATED 50u"MIN. NICKEL OVERALL  
100u" MIN. MATTE TIN PLATED ON SOLDERING AREA,  
SELECTIVE GOLD PLATED ON CONTACT AREA.  
SHIELD: CODE N: NICKEL 40u" ~120u" PLATED OVERALL.  
T: SELECTIVE 60u" MIN. MATTE TIN ON LEGS OVER 40u"~120u" NICKEL.
- 3.10033526-X3212XLF MEETS THE EUROPEAN UNION DIRECTIVE AS DESCRIBE  
IN GS-22-008 AND ITS HSG WILL WITHSTAND EXPOSE TO 260 DEGREE C  
PEAK TEMPATURE FOR 10 SECONDS IN A IR REFLOW APPLICATION.
4. PRODUCT SPEC: GS-12-174 ; PACKAGE SPEC: GS-14-873.

5. PRODUCT ORDERING DATA :

FOR LEAD-FREE

10033526 - N X X X M LF  
LF: Lead Free  
M: WITH MYLAR  
BLANK: WITHOUT MYLAR  
PACKAGING METHOD:  
2: TAPE & REEL PACKAGING  
POST OPTION:  
1 : WITH PLASTIC POST.  
2 : WITHOUT PLASTIC POST.  
HSG MATERIAL:  
1 OR 2 : HIGH TEMP THERMOPLASTIC  
PLATING IN CONTACT AREA:  
3 : 30u" Au.  
N: NICKEL FOR SHIELD.  
T: SELECTIVE TIN ON LEGS.

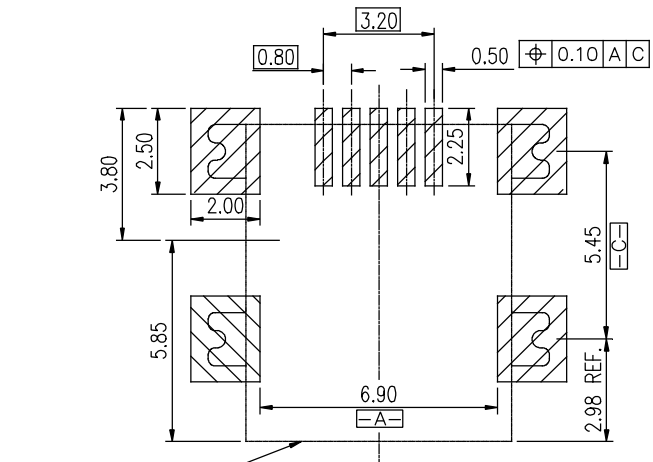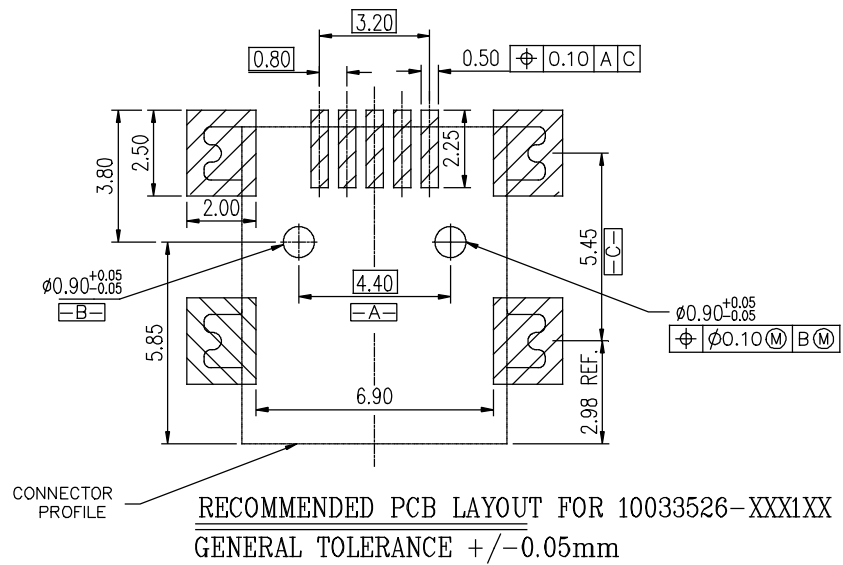

RECOMMENDED PCB LAYOUT FOR 10033526-XXX2X  
GENERAL TOLERANCE +/-0.05mm

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI	
ltr	ecn no	dr	date	linear	.X ± 0.30	projection	title	www.fciconnect.com	
N					.XX ± 0.20		MINI USB B-TYPE SMT RECEPTACLE		
				angles	.XXX ± 0.10				
				dr	JASON HSU 12/27/10	MM	product family 511	code	
				enrg	JASON HSU 12/27/10			TWN	
				chr	GARY HSIEH 12/27/10	scale	A4	sheet	
				appd	JOSEPH HSIA 12/27/10			2 of 2	
sheet index	revision sheet							cage code	