

5





4

3

2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

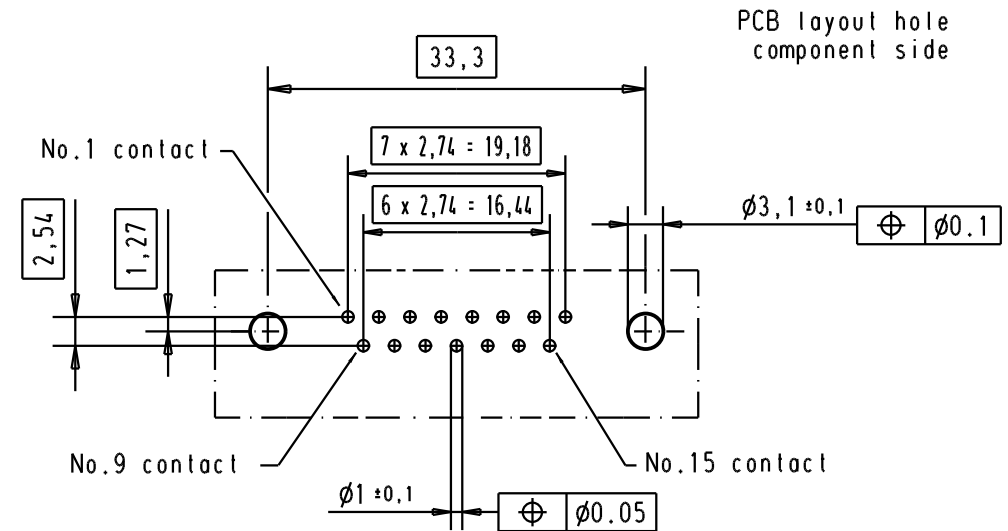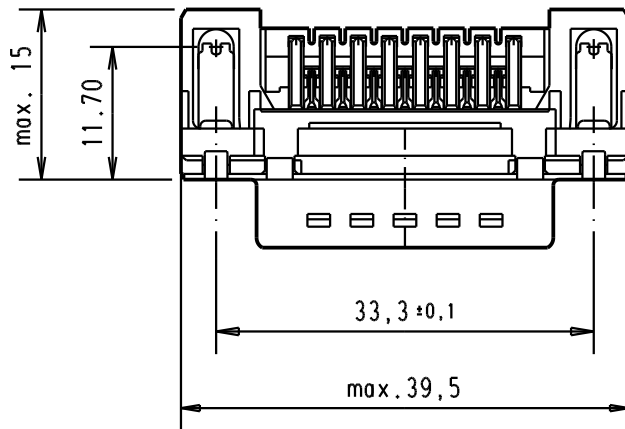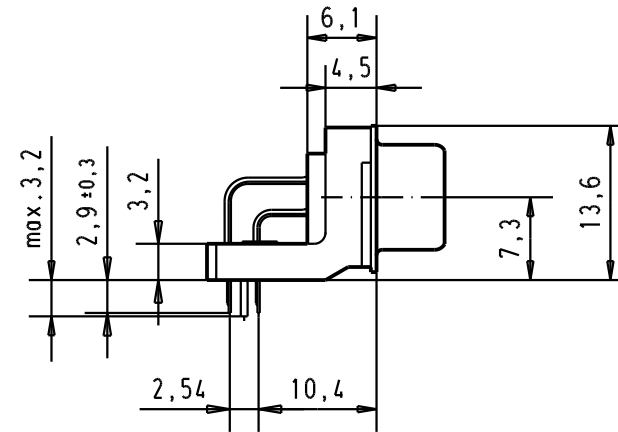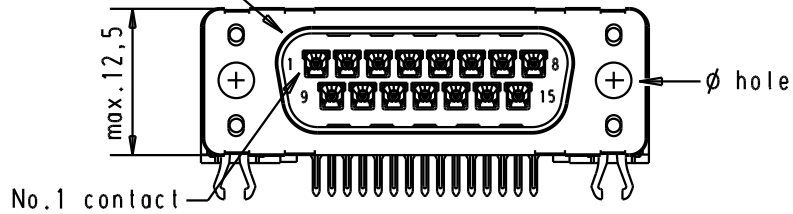

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

							Det.	Name			
							Detail.	15/dec/00	ALSPACE		
			31892	22/04/04	JH		Insp.				
09 65 262 3810	3.1 ± 0.1	1	31084	04/09/02	YT		Stand.				
09 65 262 6810	3.1 ± 0.1	2	29689	02/07/01	AA						
09 65 262 7810	3.1 ± 0.1	3	27960	15/dec/00	ALSPACE						
Part number	ø hole	Performance level	Mod.	Det.	Name						



All Dim. in mm
Orig. Size DIN A 4

D-Sub, male, standard angle,
15 poles, with solder pin
hole and grounding board lock

Maßstab/
Scale

1.5:1

HARTING EURL
F-95972 Paris



TB 0965262x81x

Blatt/ Page

4

Sub.