1575.42MHZ; 12 x 12 x 2mm GPS Patch Antenna

APAE1575R1220ABDC2-T

MSL level: Not Applicable





vel: Not Applicable

FEATURES:

- High Gain
- Compact Size and Low Profile
- Pin type
- Customization Available
- RoHS Compliance


▼ TYPICAL APPLICATIONS:

Automotive navigation, Marine buoys, Surveying equipment, Cell phone, Laptop, Healthcare and medical monitoring devices, PND, PDA

> STANDARD SPECIFICATIONS:

| Parameters | Min. | Typ. | Max. | Units | Note |
|-----------------------------------|---------------|------|------|--------|---|
| Receiving Frequency Range | 1575.42±1.023 | | | MHz | |
| Center Frequency @ 10dB bandwidth | 1578.0±3.0 | | | MHz | (with adhesive tape on the ground plane) |
| -10dB bandwidth | 4.0 | | | MHz | |
| Gain(at Zenith 90°) | | 0.5 | | dBic | (Peak gain on standardized Ground Plane.) |
| Return Loss at Center Frequency | -15.0 | | | dB | |
| VWSR | | | 1.5 | | |
| Polarization Model | RHCP | | | | (Right Hand Circular Polarization) |
| Impedance | 50 | | Ω | | |
| Frequency Temperature Coefficient | | | 20 | ppm/°C | |

TEST CONDITIONS & TEST SETUP:

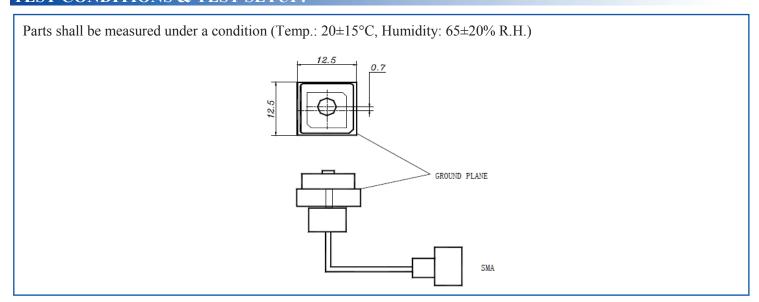






1575.42MHZ; 12 x 12 x 2mm GPS Patch Antenna

APAE1575R1220ABDC2-T






► IMPEDANCE CHARACTERISTICS

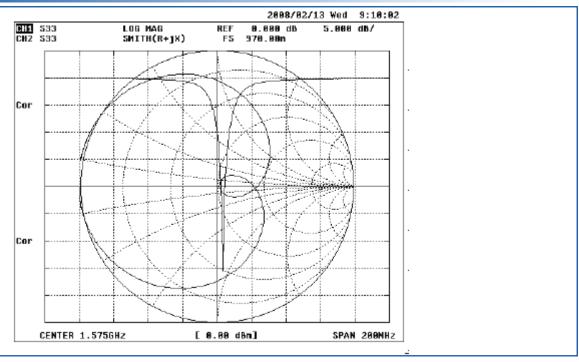

OUTLINE DRAWING:

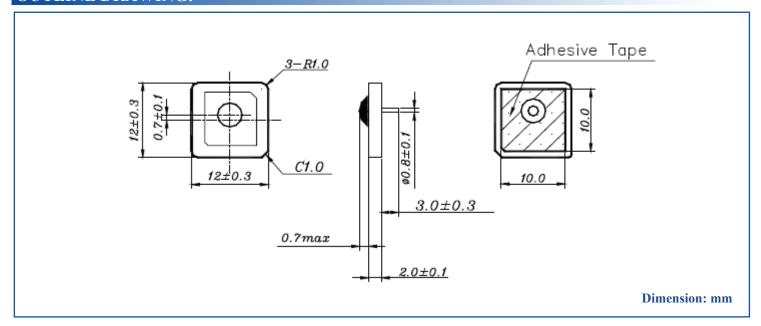





1575.42MHZ; 12 x 12 x 2mm GPS Patch Antenna

APAE1575R1220ABDC2-T






PACKAGING:

"T" is for a vacuum sealed tray containing 50 units.


1000 pieces is the suggested quantity containing 20-trays with 50-pcs per Tray.

NOTE: This product is vacuum packaged to reduce the possibility of oxidation and/or contamination during storage

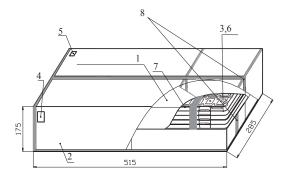

Inner Box dimensions (unit: mm)

| NO. | Inallie | | |
|-----|-------------------------|--|--|
| 1 | Inner Box | | |
| 2 | Package | | |
| 3 | Vacuum Bag | | |
| 4 | Certificate of approval | | |
| 5 | Label | | |
| 6 | Cushion | | |
| 7 | Tray | | |
| 8 | Adhesive tape | | |
| | | | |

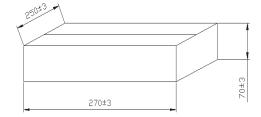

CAUTION:

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

NOTE:

- 1) The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- 2) ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- 3) In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- 4) When changing your production process, please notify ABRACON immediately.
- 5) ABRACON Corporation's products are COTS Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON Corporation is required. Please contact ABRACON Corporation for more information.
- 6) All specifications and Marking will be subject to change without notice.

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



