


SMDJE

Automotive grade 3000 W Transient voltage suppressor



Product features

- Automotive grade (AEC-Q101 qualified)
- Low profile SMC package
- Excellent clamping capability
- High reliability application
- 3000 W peak pulse power capability at 10/1000 μ s waveform
- Typical I_R less than 5 μ A
- Fast response time: typically less than 1.0 ps from 0 V to V_{BR} minimum
- Plastic package meets UL 94 V-0 flammability rating
- Meets moisture sensitivity level (MSL) level 1
- Terminal: tin plated, solderable per J-STD-002
- UL 497B recognized.
File No. : E198449 Guide QVGQ2

Applications

- Automotive chassis and safety systems
- Advanced driver assistance systems (ADAS)
- Communication and infotainment systems
- Network systems and body electronics
- Power Train controls
- xEV and battery systems

Environmental compliance and general specifications



- ISO16750-2 P5A: 12 V system (90 V/4 Ω /200 ms)
- ISO16750-2 P5A: 24 V system (151 V/8 Ω /200 ms)
- AEC-Q101 qualified



Ordering part number

	S	M	D	J	E	1	2		C	A		H
Family name												
V_R voltage ("-" indicates decimal point)												
Bi-/Uni-Directional (Blank=Uni, C=Bi)												
Voltage tolerance												
High reliability application												

PIN configuration



Powering Business Worldwide


Absolute maximum ratings

(+25 °C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage operating junction temperature range	T_{STG}/T_J	-55 to +150	°C
Steady state power dissipation at $T_L = +75$ °C	$P_{M(AV)}$	6.5	W
Peak pulse power dissipation on 10/1000 μ s waveform	P_{PP}	3000	W
Maximum instantaneous forward voltage at 100 A for unidirectional	V_F	5	V
Peak forward surge current, 8.3 ms single half sine wave ¹	I_{FSM}	300	A
Typical thermal resistance junction to lead	$R_{\theta JL}$	15	°C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	75	°C/W


1. Measured on 8.3 ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle = 4 per minute maximum

Mechanical parameters, pad layout- mm/inches

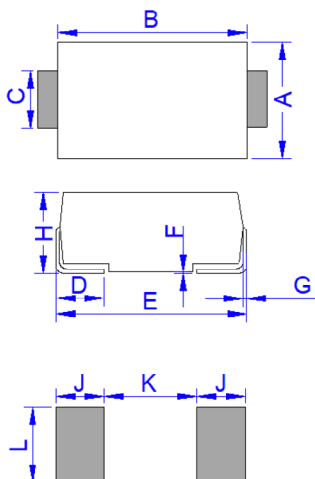

Dimension	Millimeters		Inches	
	Minimum	Maximum	Minimum	Maximum
A	5.75	6.25	0.226	0.246
B	6.90	7.40	0.272	0.291
C	2.75	3.25	0.108	0.128
D	0.95	1.52	0.037	0.060
E	7.70	8.20	0.303	0.323
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.15	2.62	0.085	0.103
J	2.40	-	0.094	-
K	-	4.20	-	0.165
L	3.30	-	0.130	-

Part marking




Cathode band (uni-polar only)
Part marking:
xxxx = Date code
yyyy- Refer to marking designator listed in Electrical characteristics table

Packaging information - mm/inches

Drawing not to scale.

Supplied in tape and reel packaging, 3,000 parts per 13" diameter reel (EIA-481 compliant)

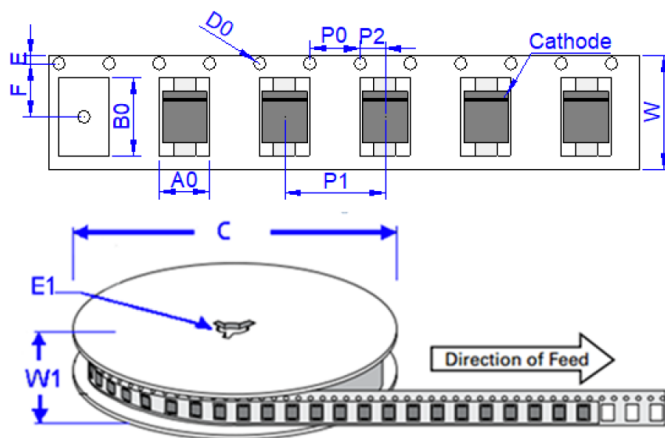


Dimensions	Millimeters	Inches
A0	6.05 ± 0.3	0.238 ± 0.012
B0	8.31 ± 0.3	0.327 ± 0.012
C	330.0	13.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	7.50 ± 0.2	0.295 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	8.00 ± 0.2	0.3145 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	16.0 ± 0.2	0.630 ± 0.008
W1	19.7 ± 2.0	0.776 ± 0.079

Electrical specifications (+25 °C)


Part number		Marking		V_R	$I_R @ V_R$	$V_{BR} @ I_T$		I_T	$V_C @ I_{PP}$	I_{PP}
Uni-polar	Bi-polar	Uni	Bi	(V)	(μ A)	min (V)	max (V)	(mA)	max (V)	(A)
SMDJE12AH	SMDJE12CAH	H12A	H12C	12	5	13.3	14.7	5	19.9	150.8
SMDJE13AH	SMDJE13CAH	H13A	H13C	13	5	14.4	15.9	5	21.5	139.5
SMDJE14AH	SMDJE14CAH	H14A	H14C	14	5	15.6	17.2	5	23.2	129.3
SMDJE15AH	SMDJE15CAH	H15A	H15C	15	5	16.7	18.5	5	24.4	123
SMDJE16AH	SMDJE16CAH	H16A	H16C	16	5	17.8	19.7	5	26	115.4
SMDJE17AH	SMDJE17CAH	H17A	H17C	17	5	18.9	20.9	5	27.6	108.7
SMDJE18AH	SMDJE18CAH	H18A	H18C	18	5	20	22.2	5	29.2	102.7
SMDJE20AH	SMDJE20CAH	H20A	H20C	20	5	22.2	24.5	5	32.4	92.6
SMDJE22AH	SMDJE22CAH	H22A	H22C	22	5	24.4	26.9	5	35.5	84.5
SMDJE24AH	SMDJE24CAH	H24A	H24C	24	5	26.7	29.5	5	38.9	77.1
SMDJE26AH	SMDJE26CAH	H26A	H26C	26	5	28.9	31.9	5	42.1	71.3
SMDJE28AH	SMDJE28CAH	H28A	H28C	28	5	31.1	34.4	5	45.4	66.1
SMDJE30AH	SMDJE30CAH	H30A	H30C	30	5	33.3	36.8	5	48.4	62
SMDJE33AH	SMDJE33CAH	H33A	H33C	33	5	36.7	40.6	5	53.3	56.3
SMDJE36AH	SMDJE36CAH	H36A	H36C	36	5	40	44.2	5	58.1	51.6
SMDJE40AH	SMDJE40CAH	H40A	H40C	40	5	44.4	49.1	5	64.5	46.5
SMDJE43AH	SMDJE43CAH	H43A	H43C	43	5	47.8	52.8	5	69.4	43.2
SMDJE45AH	SMDJE45CAH	H45A	H45C	45	5	50	55.3	5	72.7	41.3
SMDJE48AH	SMDJE48CAH	H48A	H48C	48	5	53.3	58.9	5	77.4	38.8
SMDJE51AH	SMDJE51CAH	H51A	H51C	51	5	56.7	62.7	5	82.4	36.4
SMDJE54AH	SMDJE54CAH	H54A	H54C	54	5	60	66.3	1	87.1	34.4

Ratings and V-I characteristic curves (+25 °C unless otherwise noted)

V- I curve characteristics (Uni-directional)

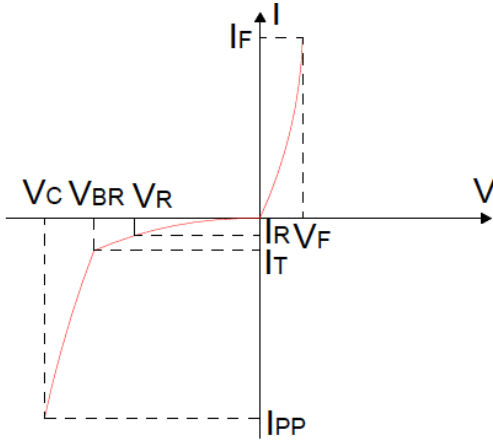

V- I curve characteristics (Bi-directional)

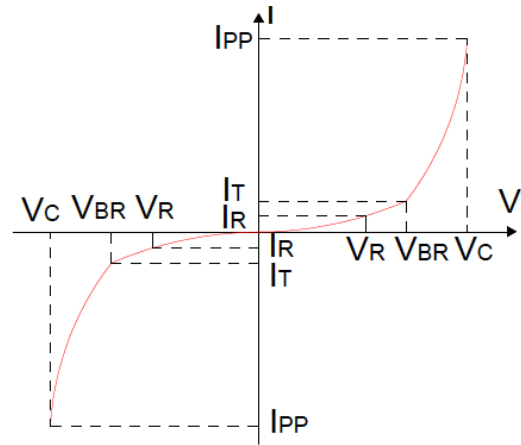

Surge waveform: 10/1000 μ s

V_R : Stand-off voltage – Maximum voltage that can be applied

V_{BR} : Breakdown voltage


V_C : Clamping voltage – Peak voltage measured across the suppressor at a specified I_{PP}

I_R : Reverse leakage current


I_T : Test current

V_F : Forward voltage drop for Uni-directional


Pulse waveform

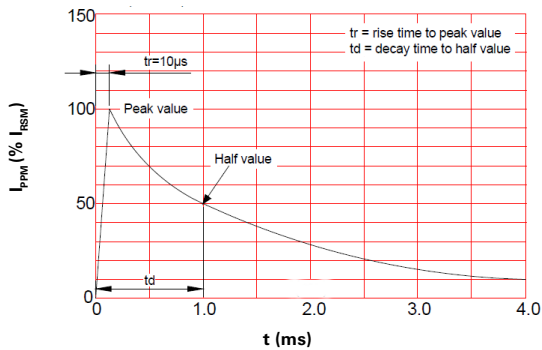

Pulse derating curve

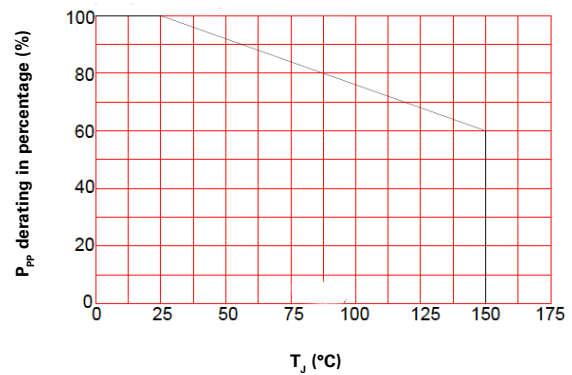

ISO16750-2 Test pulse 5A

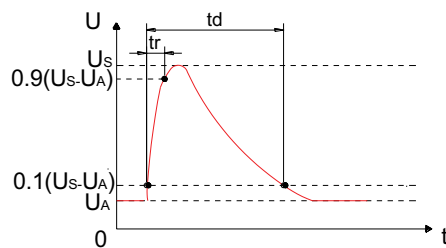

Parameter	12V system	24V system
U_S	79V to 101V	151V to 202V
R_i	0.5 Ω to 4 Ω	1 Ω to 8 Ω
t_d	40ms to 400ms	100ms to 350ms
t_r	5-10ms	5-10ms

Solder reflow profile



Table 1 - Standard SnPb solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak		
• Temperature min. (T_{smin})	100 °C	150 °C
• Temperature max. (T_{smax})	150 °C	200 °C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds	60 - 180 seconds
Ramp up rate T_L to T_p	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T_L)	183 °C	217 °C
Time (t_L) maintained above T_L	60-150 seconds	60-150 seconds
Peak package body temperature (T_p)*	Table 1	Table 2 (+0, -5 °C)
Time (t_p)* within 5 °C of the specified classification temperature (T_C)	20 seconds*	40 seconds*
Ramp-down rate (T_p to T_L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2021 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1065 BU-ELX21065
June 2021

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

