




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL DRAWING	MAY 09/16	L.CHAN
B	PROPOSAL DRAWING	OCT17/19	L.CHAN

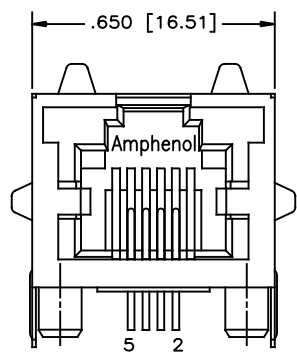


FRONT VIEW

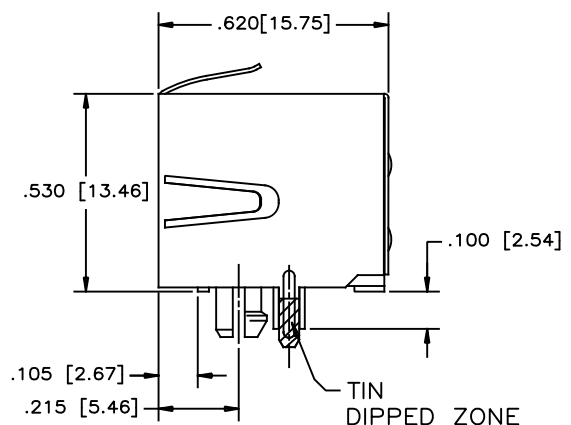

SIDE VIEW

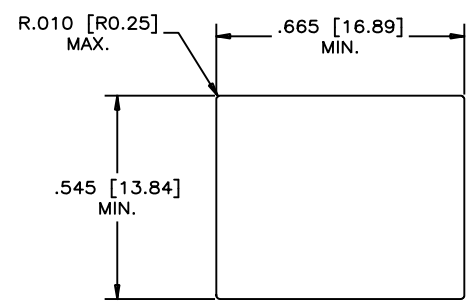

RECOMMENDED PANEL CUTOUT

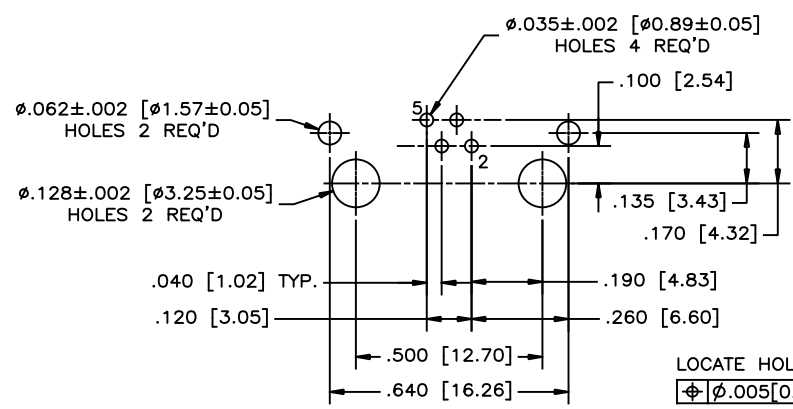

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

LOCATE HOLES
[Ø]Ø.005[0.13]
POSITION DIMENSIONS
ARE BASIC



MATERIALS:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0,
COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: 50 u " [1.27 MICRONS] MIN.
GOLD PLATED ON MATING SURFACES.
50 u " [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 u " [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: STAINLESS STEEL WITH TIN DIPPED ON SOLDER TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING TEMPERATURE AT 260°C MAXIMUM
FOR 5 SEC MAXIMUM.

ENVIRONMENTAL: OPERATING TEMPERATURE: -55°C to 85°C

AMPHENOL PART NUMBER: RJHSE-7440

UNLESS SPECIFIED OTHERWISE		DRAWN	W.QIU	MAY.09/16	Amphenol Canada Corp. Commercial Products	
PRIMARY UNITS INCH		CHECKED	L.CHAN	MAY.09/16		
SECONDARY UNITS MILLIMETER		M.E. APP'D				
REFERENCE IN PARENTHESES		Q.A. APP'D				
1 DECIMAL PLACE ±0.025		DWG APP'D			HIGH SPEED MODULAR JACK, 6 POS., 4 STAMPED CONTACTS, SHIELD WITH SIDE GROUND TABS, -RoHS COMPLIANT	
2 DECIMAL PLACE ±0.020		ENG. REL. NO.				
3 DECIMAL PLACE ±0.015		REF.				
ANGULAR DEGREES ±1°		THIRD ANGLE PROJECTION				
		DO NOT SCALE DRAWING			DWG NO. P-RJHSE-7440	
					CODE ID NO. 03554	REV B
					DWG SIZE: C	
					SCALE: N/A	
					SHEET 1 OF 1	