
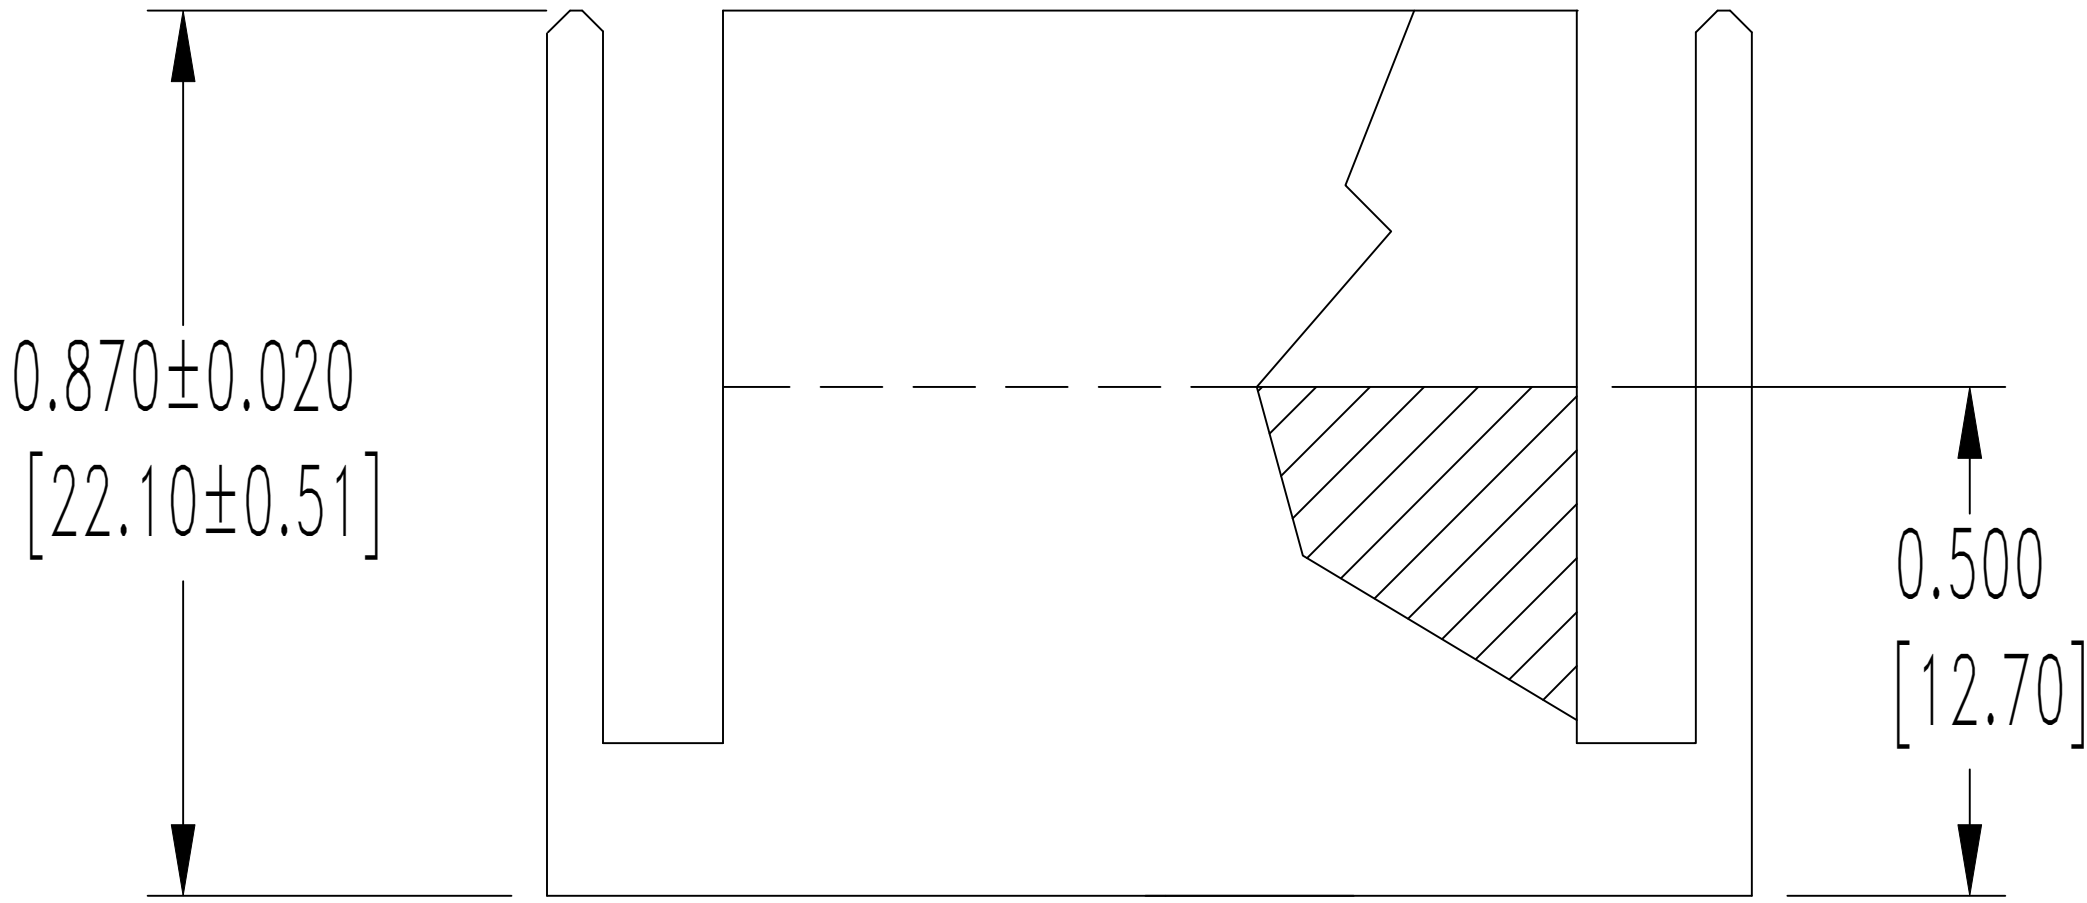




SK4111

DATE	REV	REVISION RECORD		APP	DR	CK
1-10-02	NC	ECO	18831	RCW	JLG	COLE
8-10-04	A	ECO	22837		ME	

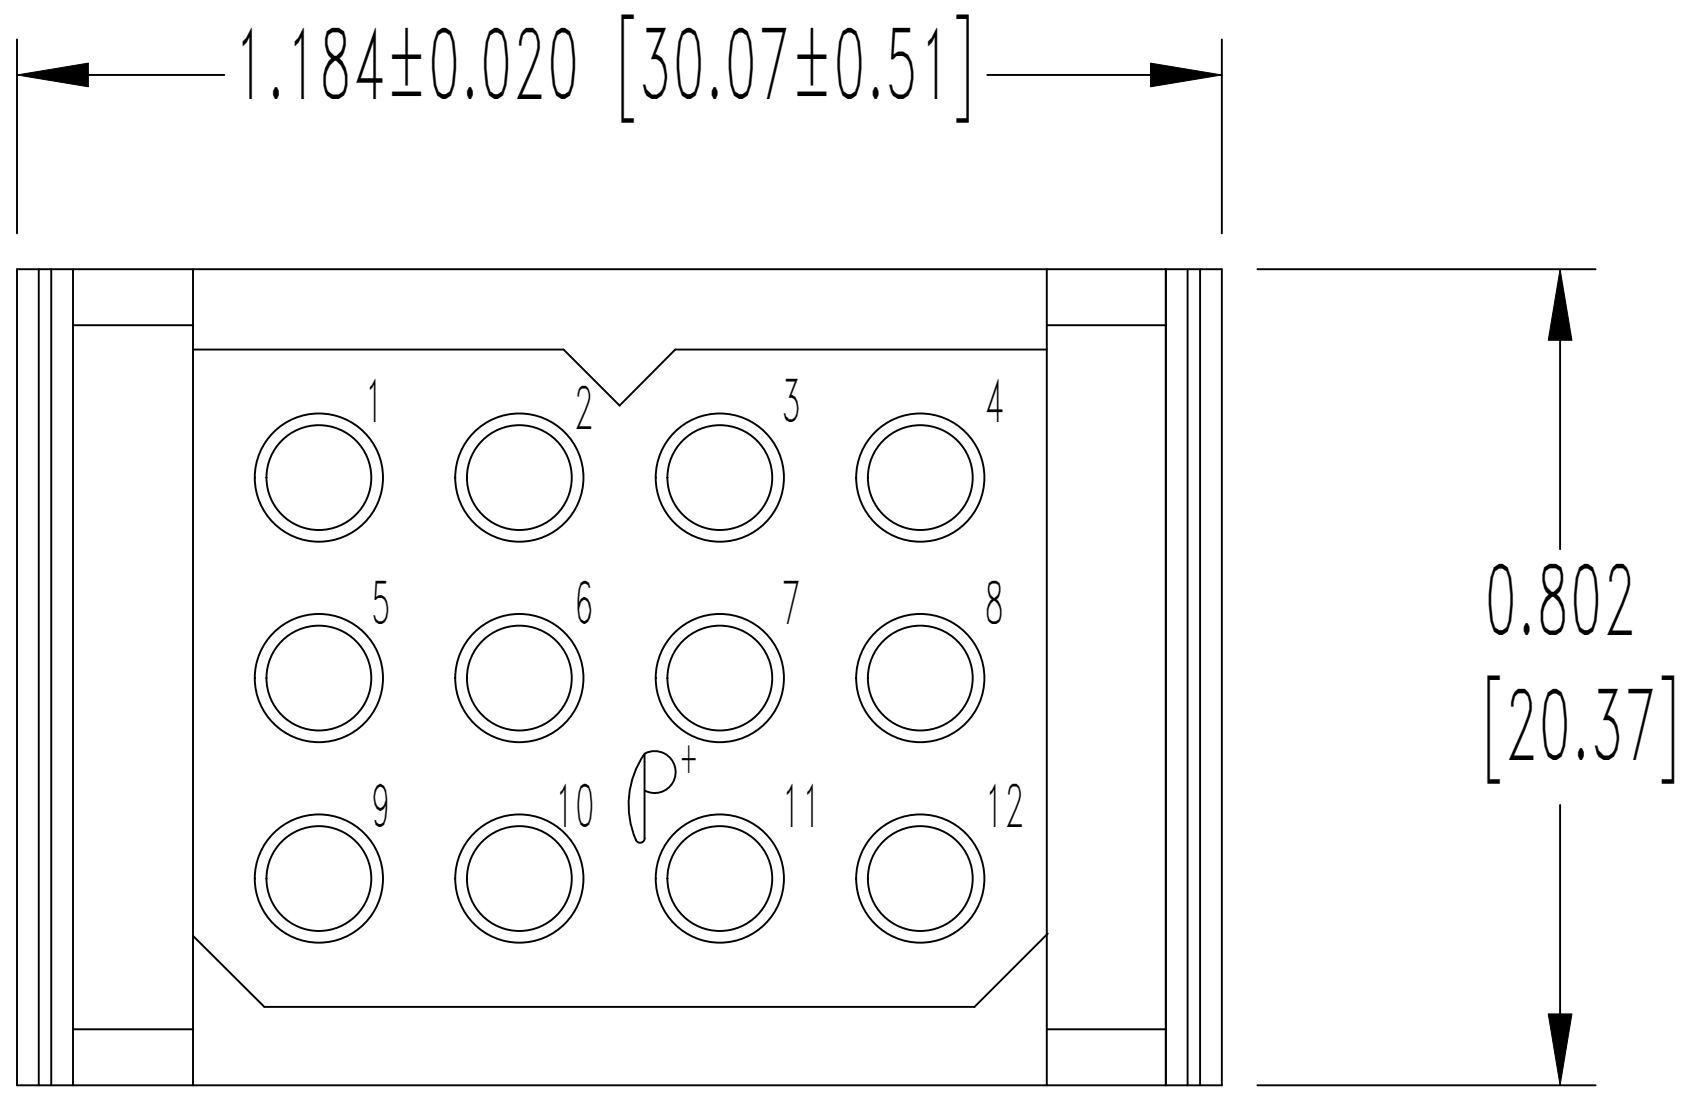


NOTES:

- MATERIALS AND FINISHES:
INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.
- ELECTRICAL CHARACTERISTICS:
INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
WORKING VOLTAGE: 600 VAC.
- WORKING TEMPERATURE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

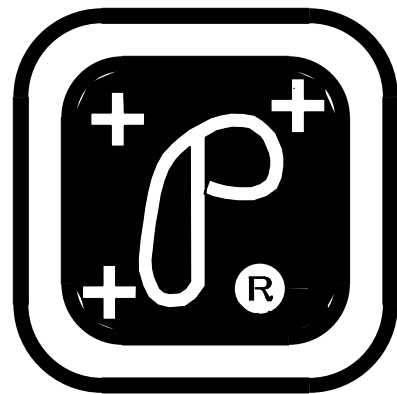

POSITRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

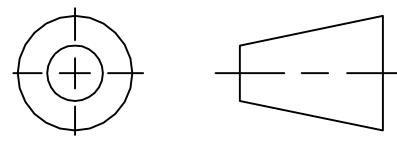

DECIMAL TOL.
± 0.015 [0.38]

ANGULAR TOL.
± 5°

PCS SERIES

SCALE

N.T.S.

DRAWN BY

J. GREEN

APPROVED BY

RCW

TITLE

PLC12M0000

DATE

1-10-02

DRAWING NUMBER

SK4111

REV.

A