


0	ER 38828 HWN 4/24/3
1	CN 39212 E DCT 1/24/5
2	CN 39255 E HWN 04/05/05

755-112-9

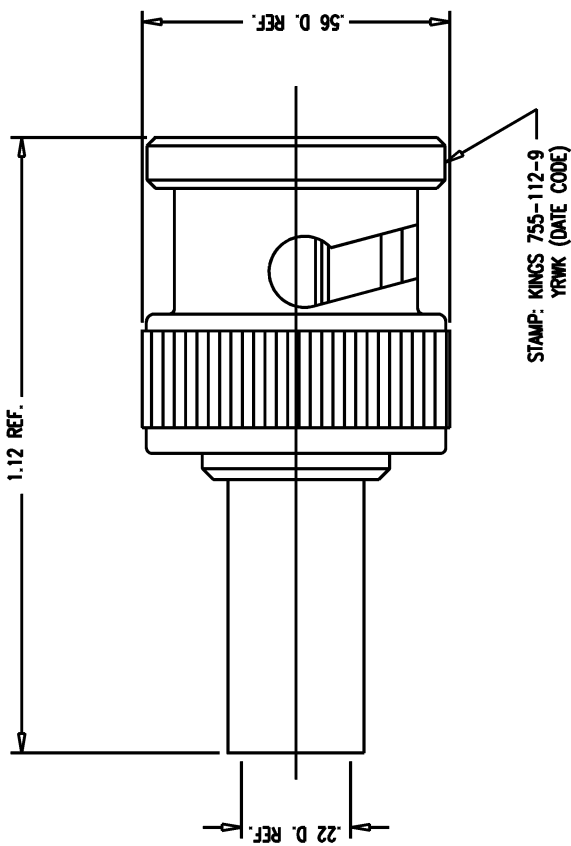

1. FOR USE WITH RG-142, 223 AND 400/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE CP-465.
3. FOR CRIMPING USE DIE KTH-2001.
4. INTERFACE PER MIL-STD-348, FIG. 301-1.
5. CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
6. MATERIALS:

INSULATOR: TEFLON, ASTM-D4894
GASKET: SILICONE RUBBER, A-A-59588
SPRING WASHER: BER. COP. ASTM-B-196
OUTER CONTACT: BER. COP. ASTM-B-196
CRIMP SLEEVE: COMM. BRONZE, ASTM-B16, H02
ALL OTHER METAL PARTS: BRASS, ASTM-B36

7. FINISHES:
CENTER CONTACT: GOLD PLATE PER ASTM-B488
SPRING WASHER: SILVER PLATE PER ASTM-B700
ALL OTHER METAL PARTS: KINGS TAINISH RESISTANT NICKEL FINISH (TR-5)

8. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHM
FREQUENCY RANGE: DC TO 4 GHz
VOLTAGE RATING: 500 VOLTS RMS

DSG

DSG

PLUG, BNC

DRAWN	HVN	DATE	2/26/3
DESIGN	HVN	DATE	2/26/3
APPR.		DATE	

THE KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

755-112-9