

Part Number : 22281103


Product Description : KK 254 Breakaway Header, Right-Angle with Friction Lock, 10 Circuits, Tin (Sn) Plating. with Kinked PC Tails

Series Number : 42228

Status : Active

Product Category : PCB Headers and Receptacles

Engineering Number : 42228-0115

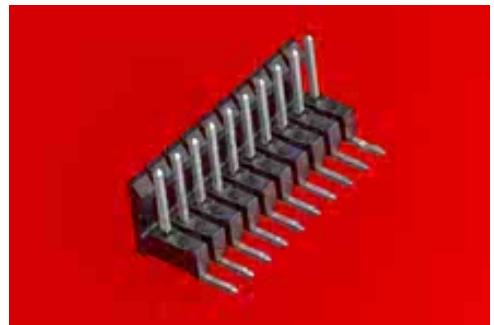

Documents & Resources

Drawings

022281103_sd.pdf

PK-40873-0056-001.pdf

3D Models and Design Files

STEP AP242

SOLIDWORKS

Creo

Symbol and Footprint (Multi-Format)

Specifications

PS-10-07-001.pdf

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	Not Reviewed per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Not Reviewed per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)4165-DC (25 June 2025)
EU RoHS	Not Reviewed per EU 2015/863

Compliance Statements

- EU RoHS

- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	42228
Description	KK 254 Breakaway Header, Right-Angle with Friction Lock, 10 Circuits, Tin (Sn) Plating. with Kinked PC Tails
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Name	KK 254
UPC	800753801509

Agency

CSA	LR19980
UL	E29179

Electrical

Current - Maximum per Contact	4.0A
Voltage - Maximum	500V

Physical

Breakaway	Yes
Circuits (Loaded)	10

Circuits (maximum)	10
Durability (mating cycles max)	25
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Net Weight	1.613/g
Number of Rows	1
Orientation	Right Angle
Packaging Type	Bag
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
PC Tail Length	3.05mm
Pitch - Mating Interface	2.54mm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Partial
Stackable	No
Temperature Range - Operating	See Product Specification
Termination Interface Style	Through Hole

Solder Process Data

Max-Duration	5
Lead-Free Process Capability	WAVE
Max-Cycle	1
Max-Temp	235

Mates With / Use With

Mates with Part(s)

Description	Part Number
KK 254 Single Row Crimp Housings	<u>2695</u>
KK 254 PC Board Connector	<u>4455</u>
KK 254 Receptacle Housings	<u>7880</u>

Application Tooling

This document was generated on Sep 24, 2025