


SPECIFICATION CONTROL DRAWING

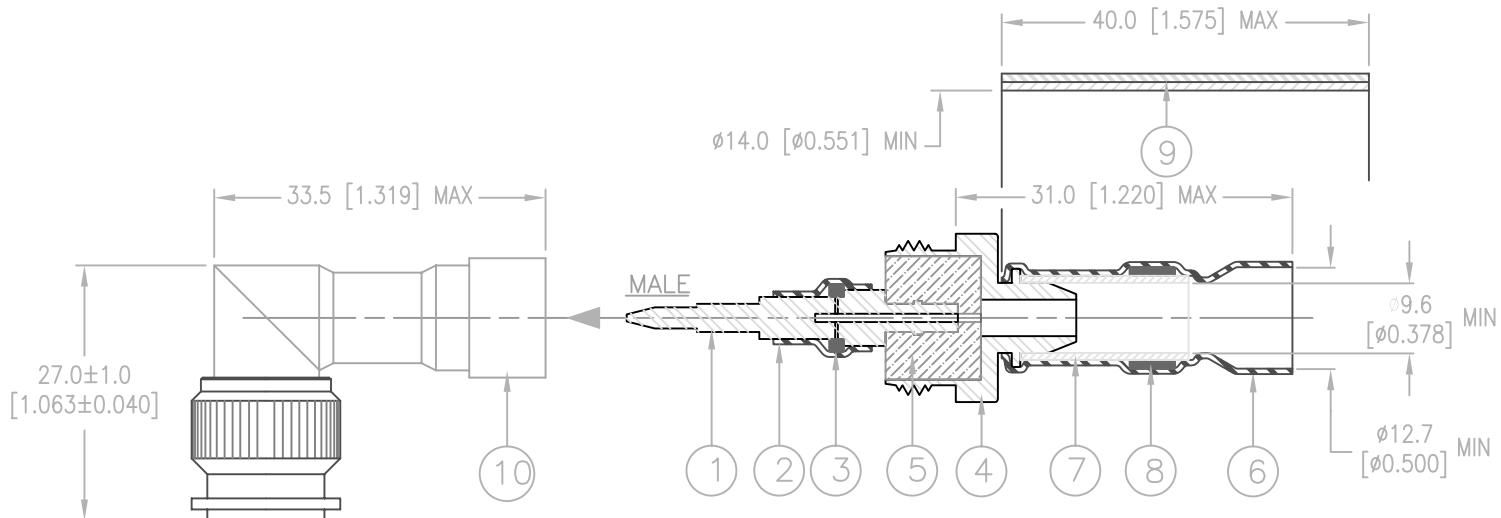


MATERIALS:

1. Center Contact: Gold plated brass (male).
2. & 6. Heat Shrinkable Insulation Sleeve: Radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
3. & 8. Solder Preform: Sn63Pb37 solder per ANSI/J-STD-006. ROL1 flux per ANSI/J-STD-004.
4. Threaded Transition Part: Silver plated brass.
5. Dielectric Insulator: PolyTetraFluoroEthylene
7. Shield: Solder impregnated, flux coated copper braid. Solder: Sn63Pb37 per ANSI/J-STD-006. Flux: ROM1 per ANSI/J-STD-004.
9. Heat Shrinkable Insulation Sleeve: Radiation cross-linked modified polyolefin with adhesive. Color: black, Marked: PTD-50-92-S
10. Connector Body: Nickel plated brass.

APPLICATION:

1. This controlled soldering device is designed for terminating the center conductor & the braid of 50Ω single or double braided coaxial cables with the following: -Tin or silver plated conductor and braid. -An insulation rating of at least 85°C.
2. The assembly is intermateable with MIL-PRF-39012C TNC type connectors.
3. Temperature range: *With black sleeve ⑨ : -55°C to +100°C.
*Without black sleeve ⑨ : -55°C to +150°C.
4. For installation procedure and application equipment consult RPIP-683-00-SAAB.
5. This device will meet Raychem specification RB-115 when assembled properly.

For best results, prepare the cable as shown:

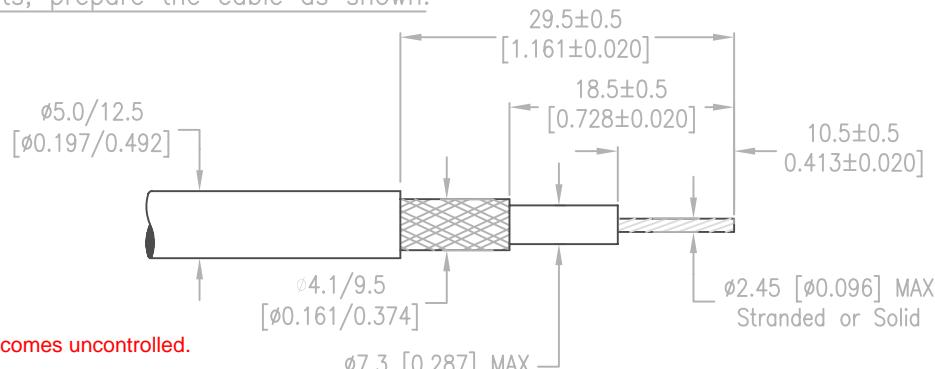

If this document is printed it becomes uncontrolled.
Check for the latest revision.

tyco
Electronics

Raychem Products
305 Constitution Drive, Menlo Park, CA. 94025 USA

TITLE:
PLUGPAK CONNECTOR
50Ω TNC

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.
INCHES DIMENSIONS ARE SHOWN IN BRACKETS.

TOLERANCES: 0.00
ANGLES: 0.0
ROUGHNESS: 0
IN MICRON

TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS
DRAWING AT ANY TIME. USERS SHOULD EVALUATE THE
SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

DOCUMENT NO:

PTD-50-92-S