

BFP196WN


Low noise silicon bipolar RF transistor

Product description

- NPN silicon planar epitaxial transistor in 4-pin dual-emitter SOT343 package for low noise and low distortion wideband amplifiers. This RF transistor benefits from Infineon long-term experience in RF components and combines ease-of-use to stable volumes production, at benchmark quality and reliability.

Feature list

- For high voltage applications $V_{CE} < 12\text{ V}$
- Maximal power $P_{tot} = 700\text{ mW}$
- Transition frequency $f_T = 7.5\text{ GHz}$
- Noise figure $NF_{min} = 1.3\text{ dB}$ at 900 MHz
- Easy to use Pb-free (RoHS compliant) and halogen-free industry standard SOT343 package with visible leads

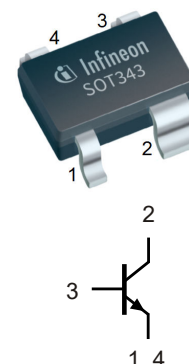

Product validation

Qualified for industrial applications according to the relevant tests of JEDEC JESD47, JESD22, and J-STD-020.
Qualified for industrial applications according to the relevant tests of AEC-Q 101.

Potential applications

- GNSS active antenna
- Amplifiers in antenna and telecommunications systems
- CATV
- Power amplifier for DECT and PCN systems

Device information

Attention: ESD (Electrostatic discharge) sensitive device, observe handling precautions

Type / Ordering code	Package	Pin configuration				Marking	Related Links
BFP196WN / BFP196WNH6327XTSA1	SOT343	1=E	2=C	3=B	4=E	DAs	see Package information SOT343

Table of contents

	Product description	1
	Feature list	1
	Product validation	1
	Potential applications	1
	Device information	1
	Table of contents	2
1	Absolute maximum ratings	3
2	Thermal characteristics	4
3	Electrical performance in test fixture	5
3.1	DC parameter table	5
3.2	AC parameter tables	5
3.3	Characteristic DC diagrams	8
3.4	Characteristic AC diagrams	11
4	Package information SOT343	17
	Revision history	18
	Disclaimer	19

Absolute maximum ratings

1 Absolute maximum ratings

Table 1 Absolute maximum ratings at $T_A = 25\text{ °C}$ (unless otherwise specified)

Parameter	Symbol	Values		Unit	Note or Test condition
		Min.	Max.		
Collector emitter voltage	V_{CEO}	–	12	V	Base open
Collector emitter voltage	V_{CES}	–	20	V	Emitter / base short circuited
Collector base voltage	V_{CBO}	–	20	V	Emitter open
Emitter base voltage	V_{EBO}	–	2	V	Collector open
DC collector current	I_C	–	150	mA	–
DC base current	I_B	–	15	mA	–
Total power	P_{tot}	–	700	mW	–
Junction temperature	T_J	–	150	°C	–
Storage temperature	T_{Stg}	-55	150	°C	–

Attention: Stresses above the maximum values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings. Exceeding only one of these values may cause irreversible damage to the component.

2 Thermal characteristics

Table 2 Thermal resistance

Parameter	Symbol	Values			Unit	Note or Test Condition
		Min.	Typ.	Max.		
Junction - soldering point	R_{thJS}	–	115	–	K/W	¹⁾

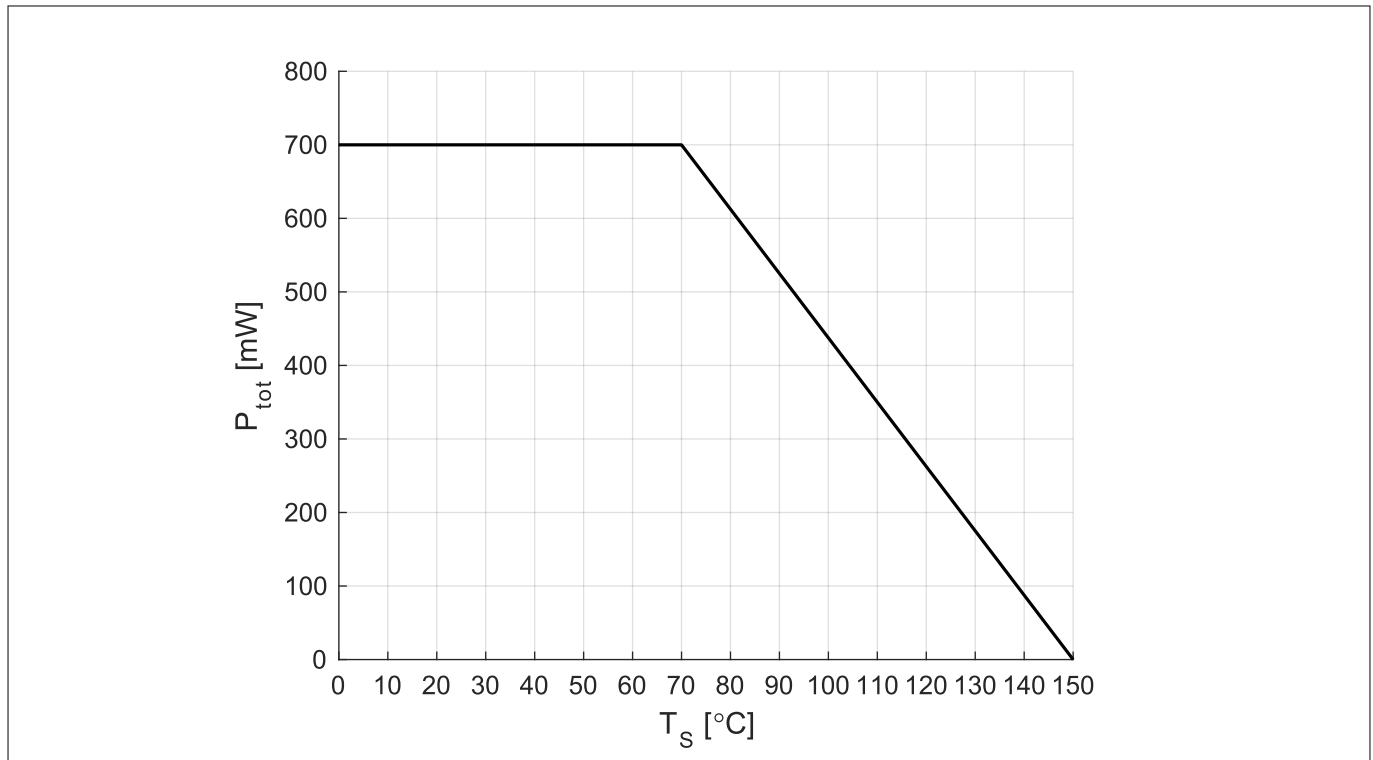


Figure 1 Absolute maximum power dissipation P_{tot} vs. T_s

Note: In the horizontal part of the above curve the junction temperature T_J is lower than $T_{J,max}$. In the declining slope it is $T_J = T_{J,max}$. P_{tot} has to be reduced according to the curve in order not to exceed $T_{J,max}$. It is $T_{J,max} = T_s + P_{tot} \cdot R_{thJS}$.

¹ For the definition of R_{thJS} please refer to the application note AN077

3 Electrical performance in test fixture

3.1 DC parameter table

Table 3 DC characteristics at $T_A = 25\text{ }^{\circ}\text{C}$

Parameter	Symbol	Values			Unit	Note or Test Condition
		Min.	Typ.	Max.		
Collector emitter breakdown voltage	V_{CEO}	12	–	–	V	$I_C = 1\text{ mA}$, open base
Collector emitter leakage current	I_{CES}	–	–	100	μA	$V_{CE} = 20\text{ V}$, $V_{BE} = 0\text{ V}$ Emitter / base short circuited
Collector base leakage current	I_{CBO}	–	–	100	nA	$V_{CB} = 10\text{ V}$, $V_{BE} = 0$ Open emitter
Emitter base leakage current	I_{EBO}	–	–	1	μA	$V_{EB} = 1\text{ V}$, $I_C = 0$ Open collector
DC current gain	h_{FE}	70	100	140		$V_{CE} = 8\text{ V}$, $I_C = 50\text{ mA}$ Pulse measured

3.2 AC parameter tables

Table 4 General AC characteristics at $T_A = 25\text{ }^{\circ}\text{C}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Transition frequency	f_T	5	7.5	–	GHz	$V_{CE} = 8\text{ V}$, $I_C = 90\text{ mA}$, $f = 500\text{ MHz}$
Collector base capacitance	C_{CB}	–	0.9	–	pF	$V_{CB} = 10\text{ V}$, $V_{BE} = 0\text{ V}$, $f = 1\text{ MHz}$ Emitter grounded
Collector emitter capacitance	C_{CE}	–	0.35	–	pF	$V_{CE} = 10\text{ V}$, $V_{BE} = 0\text{ V}$, $f = 1\text{ MHz}$ Base grounded
Emitter base capacitance	C_{EB}	–	3.8	–	pF	$V_{EB} = 0.5\text{ V}$, $V_{CB} = 0\text{ V}$, $f = 1\text{ MHz}$ Collector grounded

Electrical performance in test fixture

Measurement setup for the AC characteristics shown in the following tables is a test fixture with Bias T's in a 50 Ω system, $T_A = 25^\circ\text{C}$.

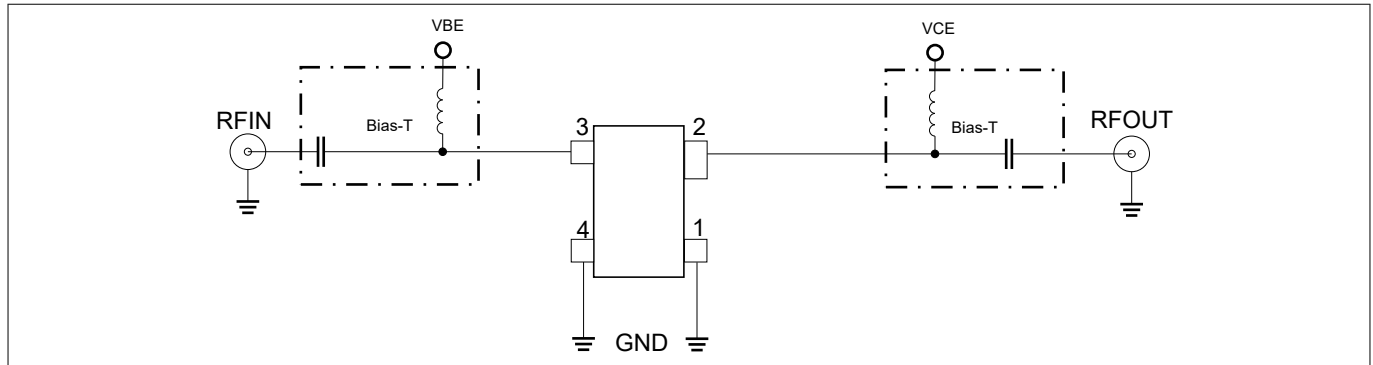


Figure 2 **BFP196WN testing circuit**

Table 5 **AC characteristics, $V_{CE} = 8\text{ V}$, $f = 0.45\text{ GHz}$**

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
Maximum power gain	G_{ms}	–	23.5	–	dB	$I_C = 50\text{ mA}$ $Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}$
Transducer gain	$ S_{21} ^2$	–	19.0	–		$Z_S = Z_L = 50\ \Omega$
Minimum noise figure	NFmin	–	0.95	–	dB	$I_C = 20\text{ mA}$, $Z_S = Z_{Sopt}$
Linearity						
1 dB compression point at output	OP1dB	–	19	–	dBm	$I_C = 50\text{ mA}$ $Z_S = Z_L = 50\ \Omega$
3rd order intercept point at output	OIP3	–	32	–		

Table 6 **AC characteristics, $V_{CE} = 8\text{ V}$, $f = 0.9\text{ GHz}$**

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
Maximum power gain	G_{ms}	–	17.0	–	dB	$I_C = 50\text{ mA}$ $Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}$
Transducer gain	$ S_{21} ^2$	–	13.0	–		$Z_S = Z_L = 50\ \Omega$
Minimum noise figure	NFmin	–	1.1	–	dB	$I_C = 20\text{ mA}$, $Z_S = Z_{Sopt}$
Linearity						
1 dB compression point at output	OP1dB	–	19	–	dBm	$I_C = 50\text{ mA}$ $Z_S = Z_L = 50\ \Omega$
3rd order intercept point at output	OIP3	–	32	–		

Table 7 **AC characteristics, $V_{CE} = 8\text{ V}$, $f = 1.5\text{ GHz}$**

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain						
Maximum power gain	G_{ms}	–	12.5	–	dB	$I_C = 50\text{ mA}$ $Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}$
Transducer gain	$ S_{21} ^2$	–	8.5	–		$Z_S = Z_L = 50\ \Omega$

(table continues...)

Electrical performance in test fixture

Table 7 (continued) AC characteristics, $V_{CE} = 8\text{ V}$, $f = 1.5\text{ GHz}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Minimum noise figure	NFmin	–	1.7	–	dB	$I_C = 20\text{ mA}$, $Z_S = Z_{Sopt}$
Linearity					dBm	$I_C = 50\text{ mA}$ $Z_S = Z_L = 50\ \Omega$
1 dB compression point at output	OP1dB	–	19	–		
3rd order intercept point at output	OIP3	–	32	–		

Table 8 AC characteristics, $V_{CE} = 8\text{ V}$, $f = 1.9\text{ GHz}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain					dB	$I_C = 50\text{ mA}$ $Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}$ $Z_S = Z_L = 50\ \Omega$
Maximum power gain	G_{ms}	–	11	–		
Transducer gain	$ S_{21} ^2$	–	6.5	–		
Minimum noise figure	NFmin	–	2.1	–	dB	$I_C = 20\text{ mA}$, $Z_S = Z_{Sopt}$
Linearity					dBm	$I_C = 50\text{ mA}$ $Z_S = Z_L = 50\ \Omega$
1 dB compression point at output	OP1dB	–	19	–		
3rd order intercept point at output	OIP3	–	32	–		

Table 9 AC characteristics, $V_{CE} = 5\text{ V}$, $f = 2.4\text{ GHz}$

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Power gain					dB	$I_C = 50\text{ mA}$ $Z_S = Z_{Sopt}$, $Z_L = Z_{Lopt}$ $Z_S = Z_L = 50\ \Omega$
Maximum power gain	G_{ms}	–	9.7	–		
Transducer gain	$ S_{21} ^2$	–	4.8	–		
Minimum noise figure	NFmin	–	2.5	–	dB	$I_C = 20\text{ mA}$, $Z_S = Z_{Sopt}$
Linearity					dBm	$I_C = 50\text{ mA}$ $Z_S = Z_L = 50\ \Omega$
1 dB compression point at output	OP1dB	–	19	–		
3rd order intercept point at output	OIP3	–	32	–		

3.3 Characteristic DC diagrams

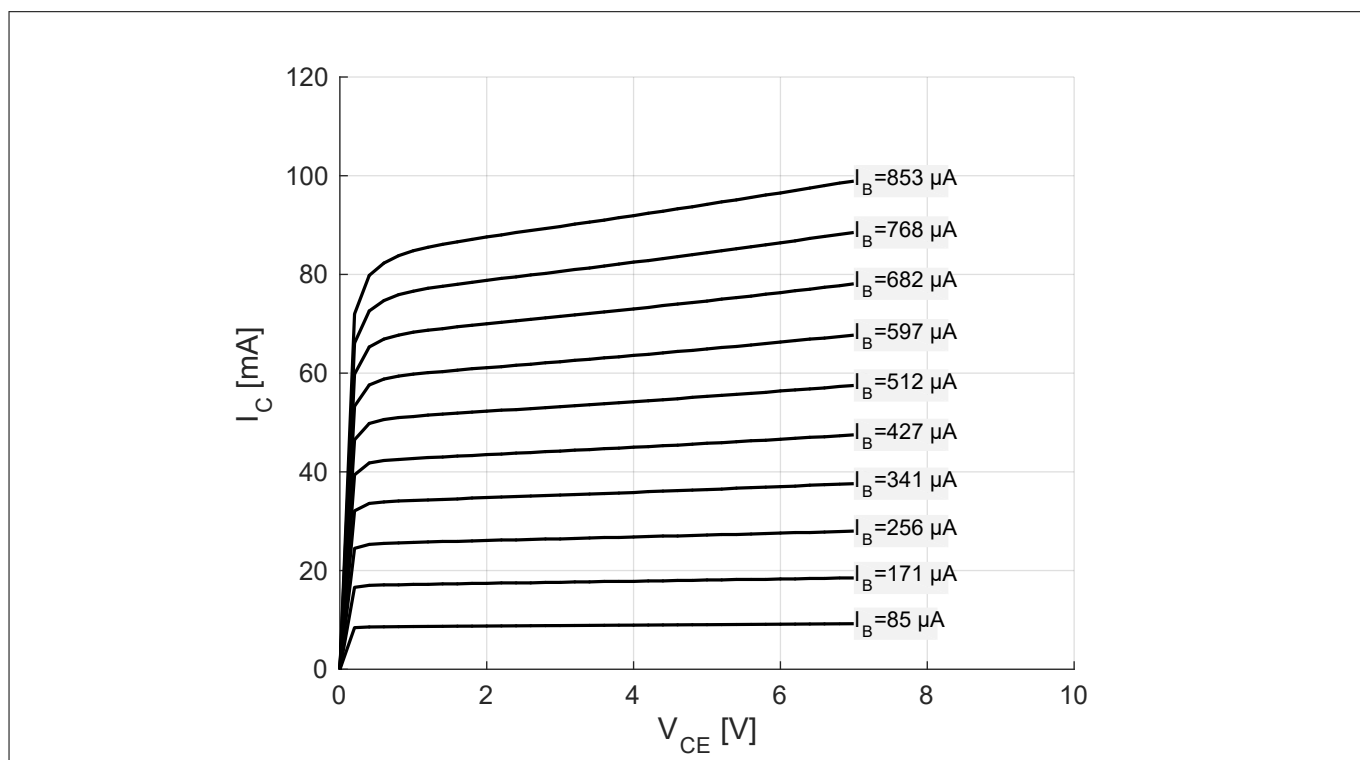


Figure 3 Collector current $I_C = f(V_{CE})$, I_B = parameter

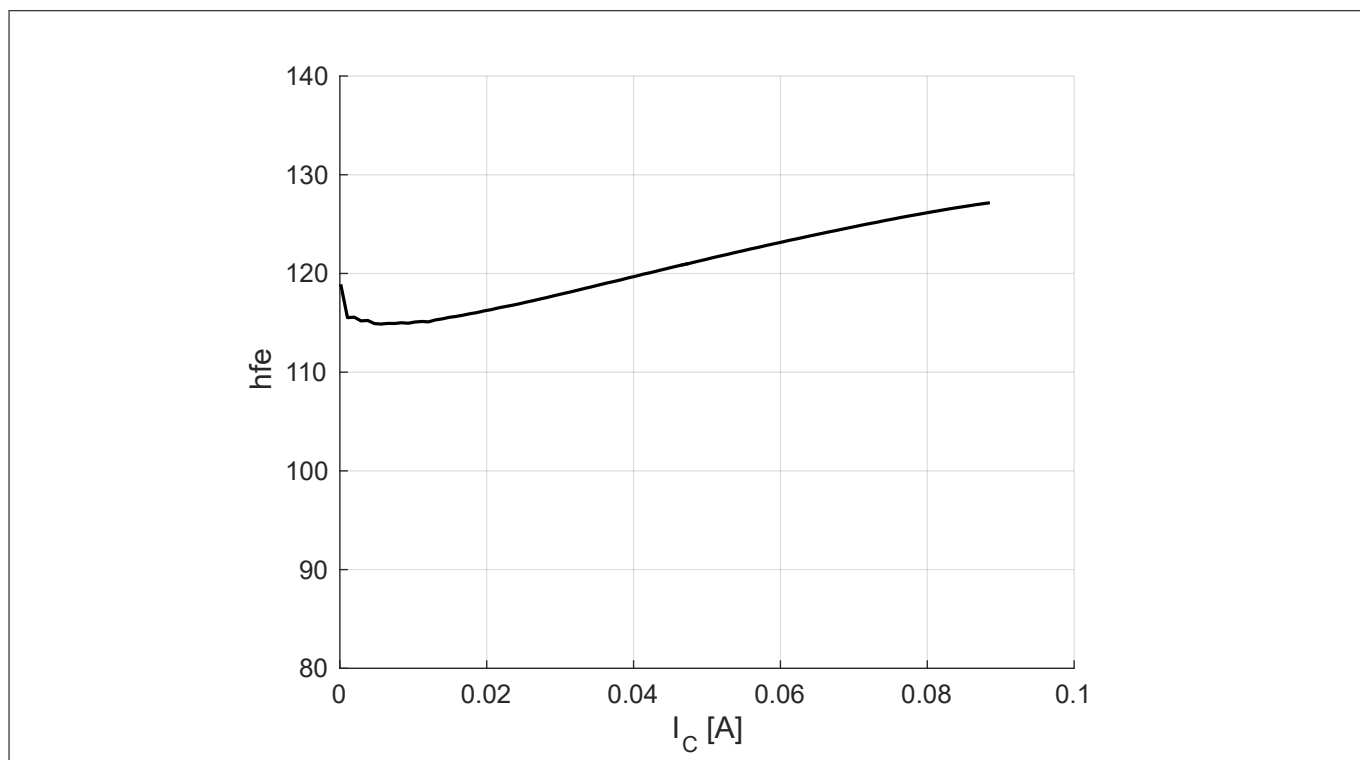


Figure 4 Current gain $h_{FE} = f(I_C)$, $V_{CE} = 8$ V

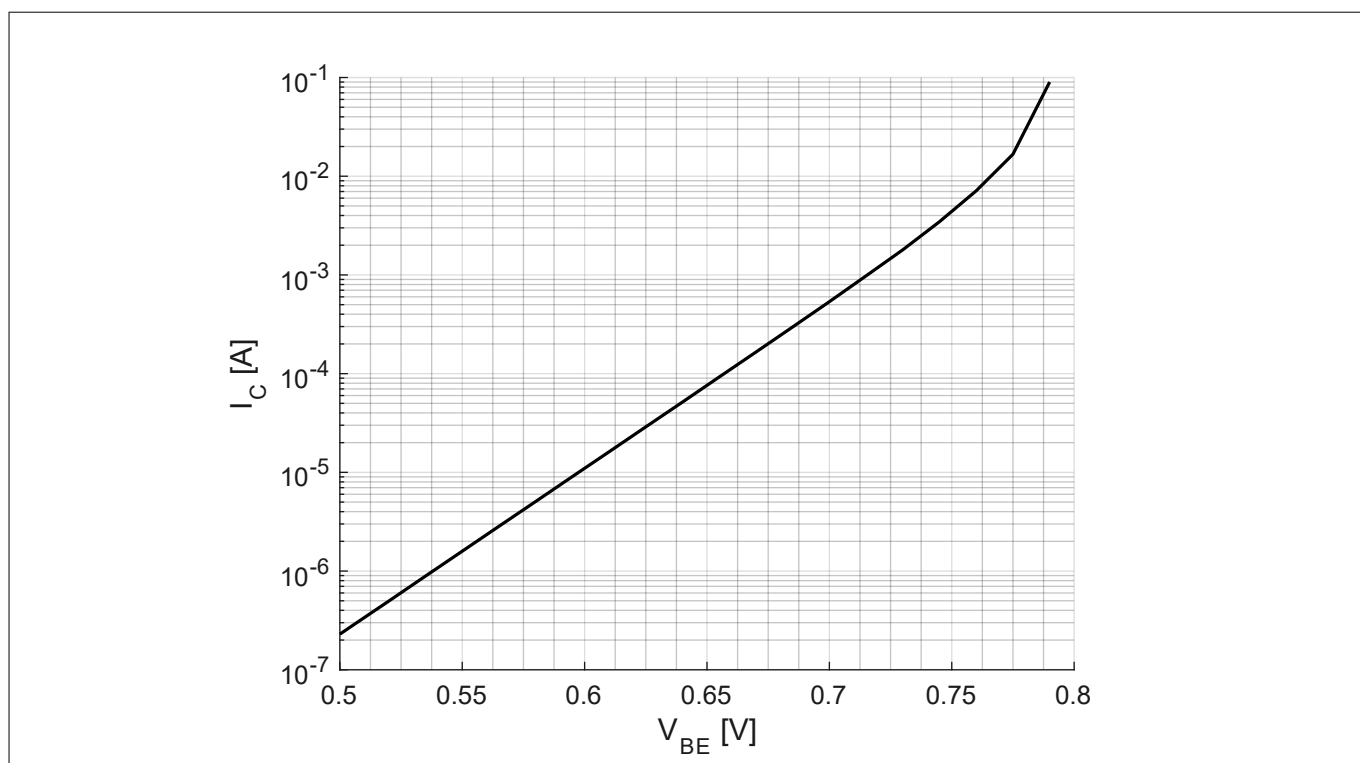


Figure 5 Collector current $I_C = f(V_{BE})$, $V_{CE} = 8\text{ V}$

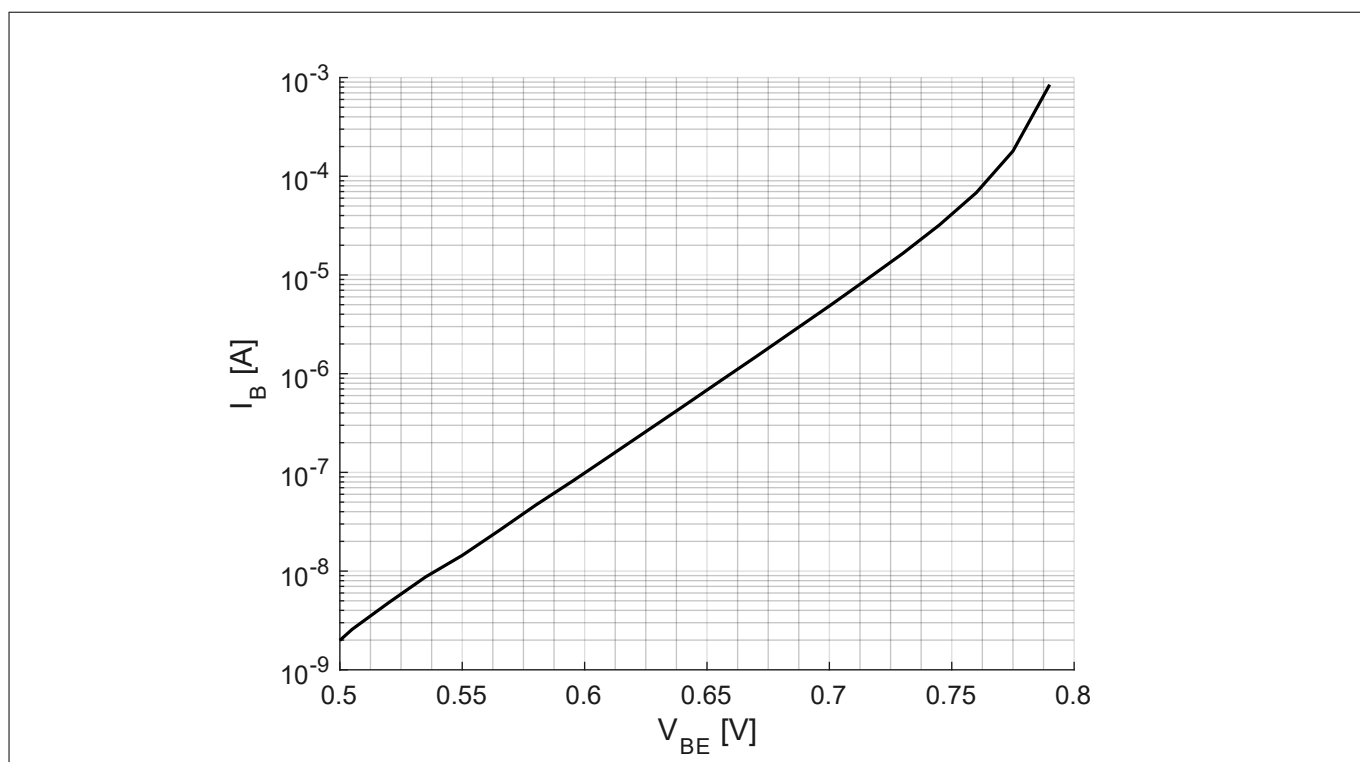


Figure 6 Base current $I_B = f(V_{BE})$, $V_{CE} = 8\text{ V}$

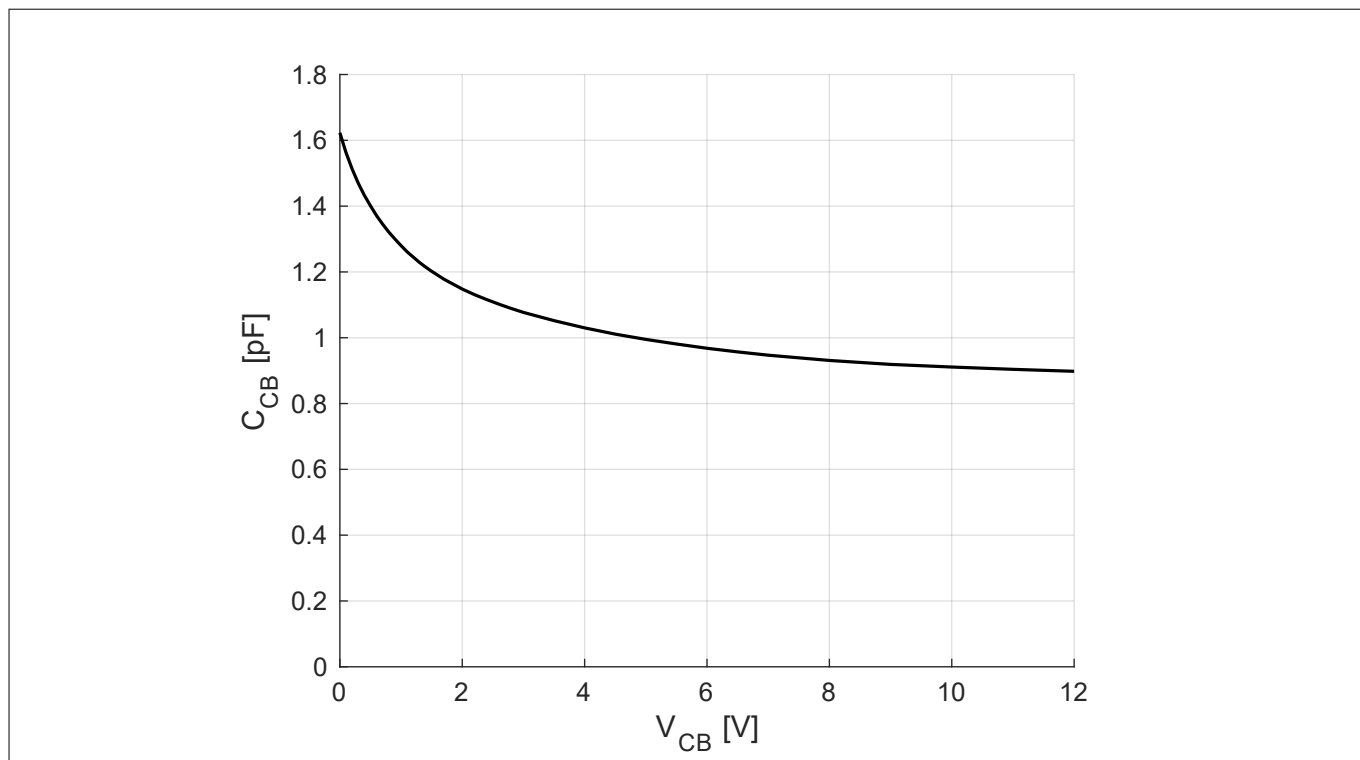


Figure 7 Collector-base capacitance $C_{cb} = f(V_{CB})$, $V_{CE} = 1\text{ MHz}$

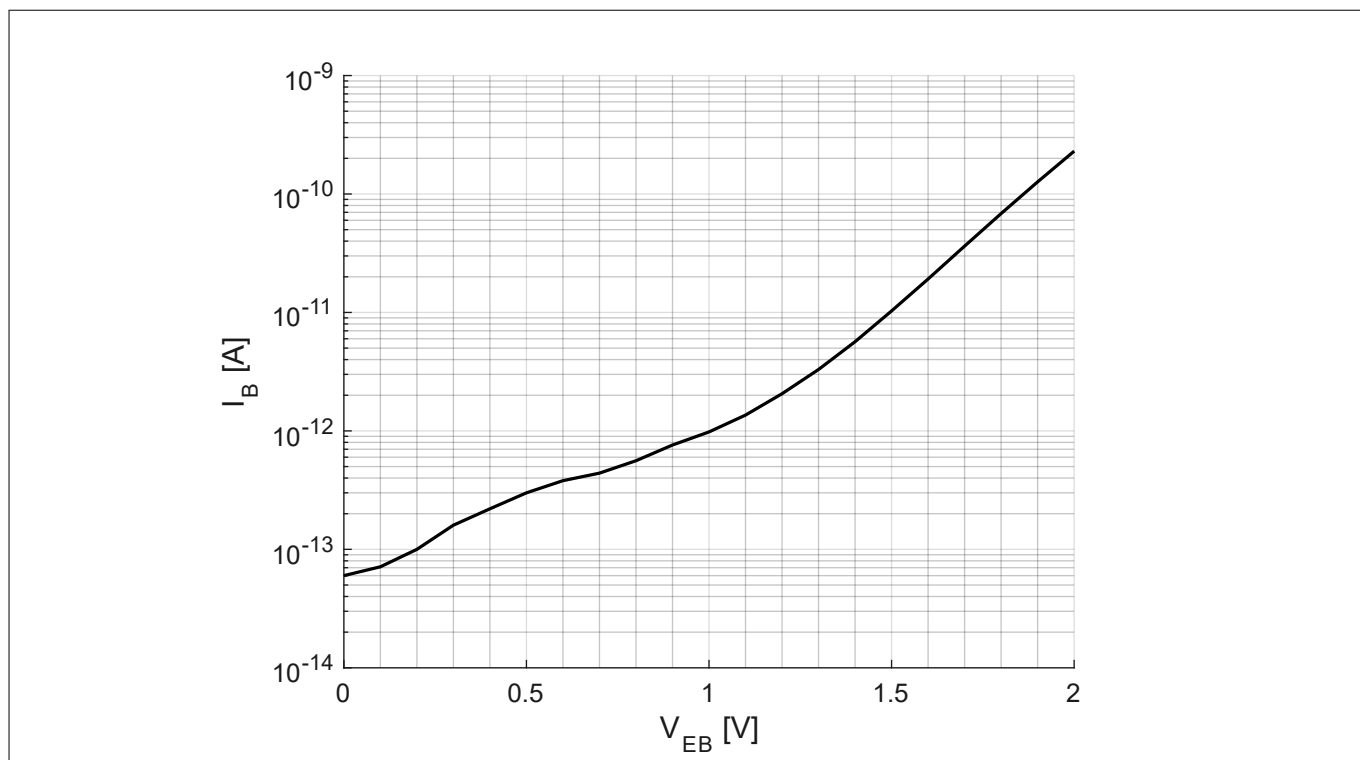


Figure 8 Base/emitter leakage current $I_B = f(V_{EB})$, $V_{CE} = 8\text{ V}$

Note: Regard absolute maximum ratings for I_C , V_{CE} and P_{tot} (see [Table 1](#))

3.4 Characteristic AC diagrams

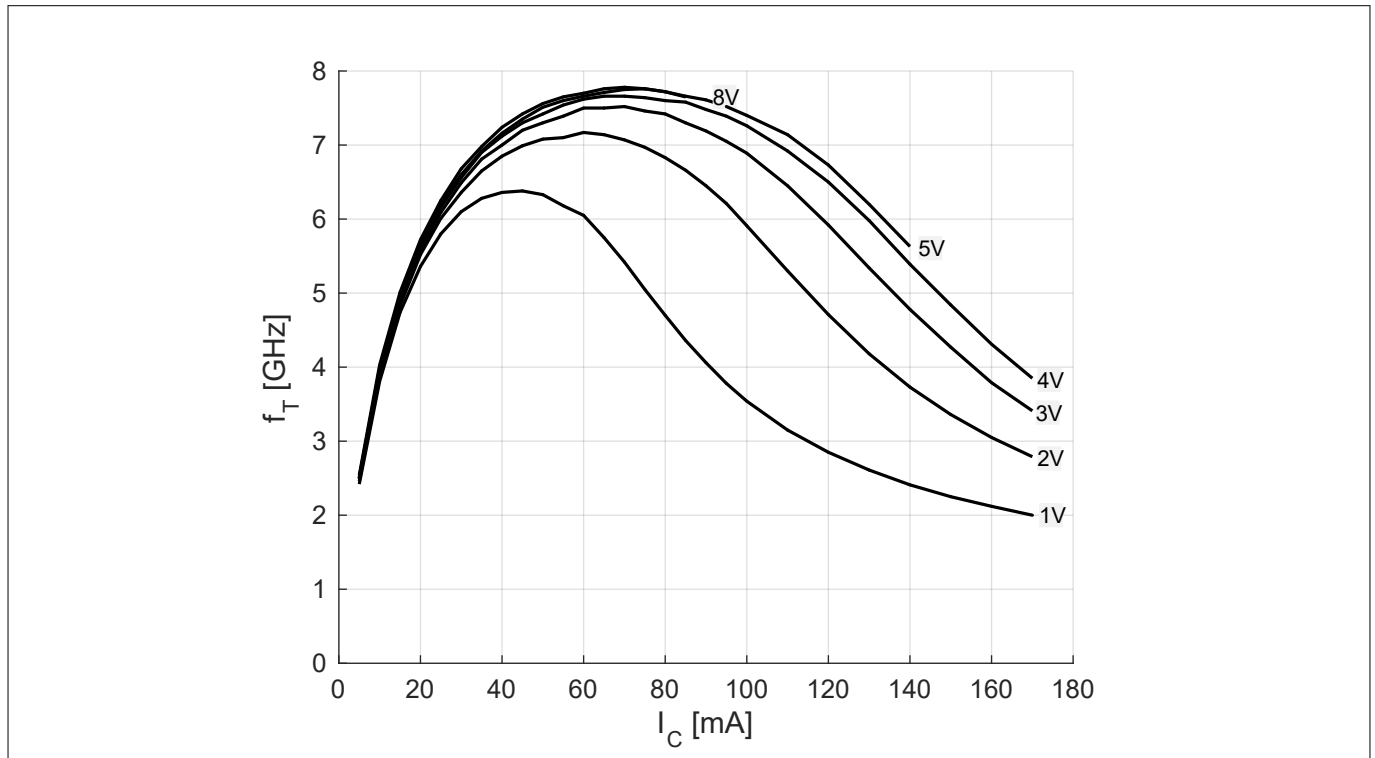


Figure 9 Transition frequency $f_T = f(I_C)$, $V_{CE} = \text{parameter}$

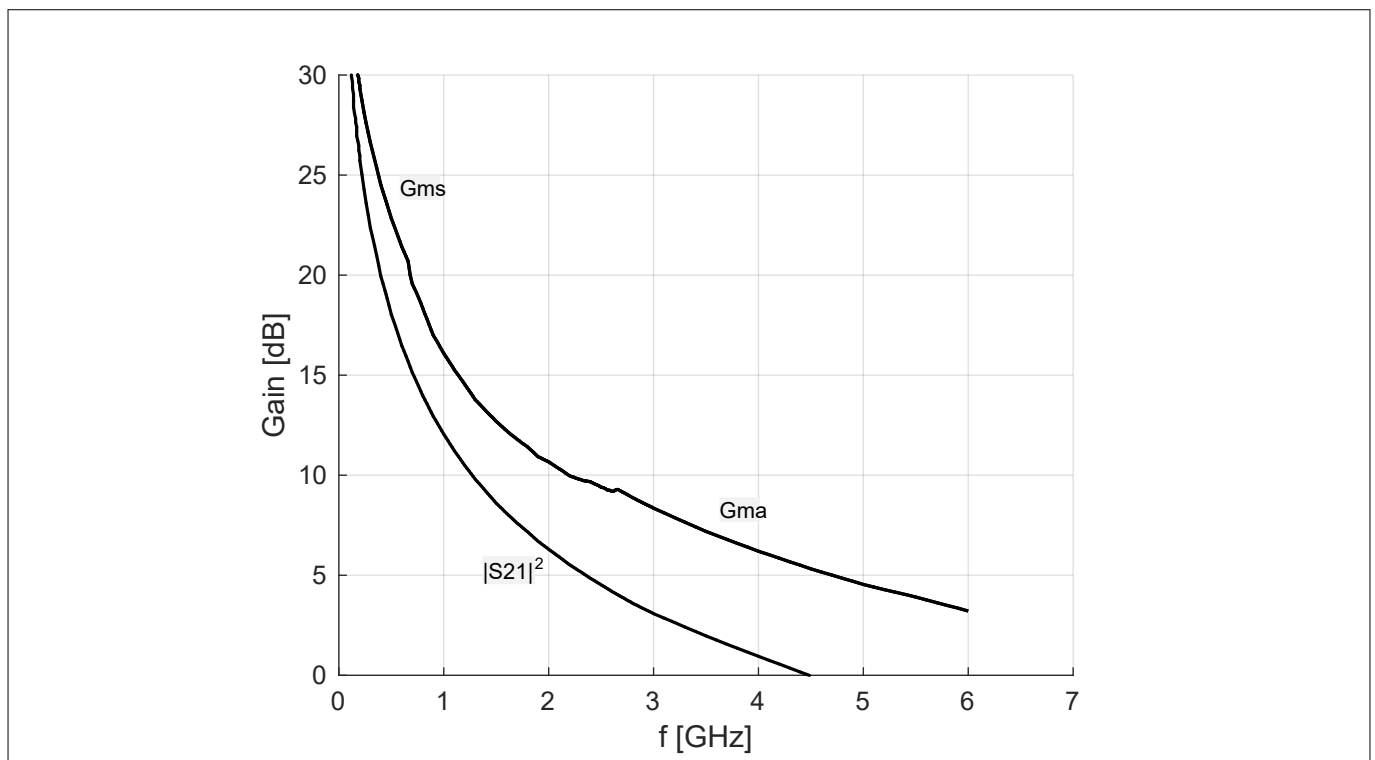


Figure 10 Gain G_{ms} , G_{ma} , $|S_{21}|^2 = f(f)$, $I_C = 50 \text{ mA}$, $V_{CE} = 8 \text{ V}$

Electrical performance in test fixture

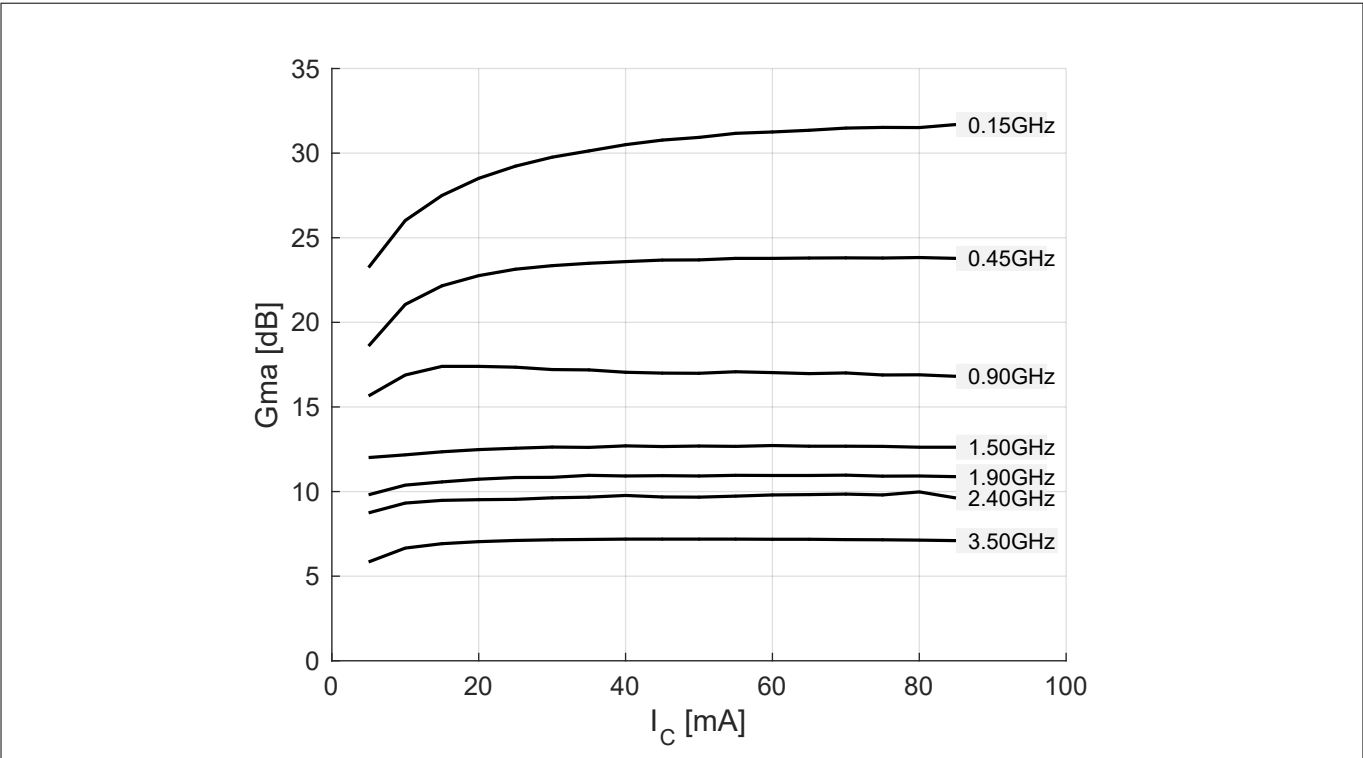


Figure 11 Maximum power gain $G_{max} = f(I_C)$, $V_{CE} = 8\text{ V}$, $f = \text{parameter}$

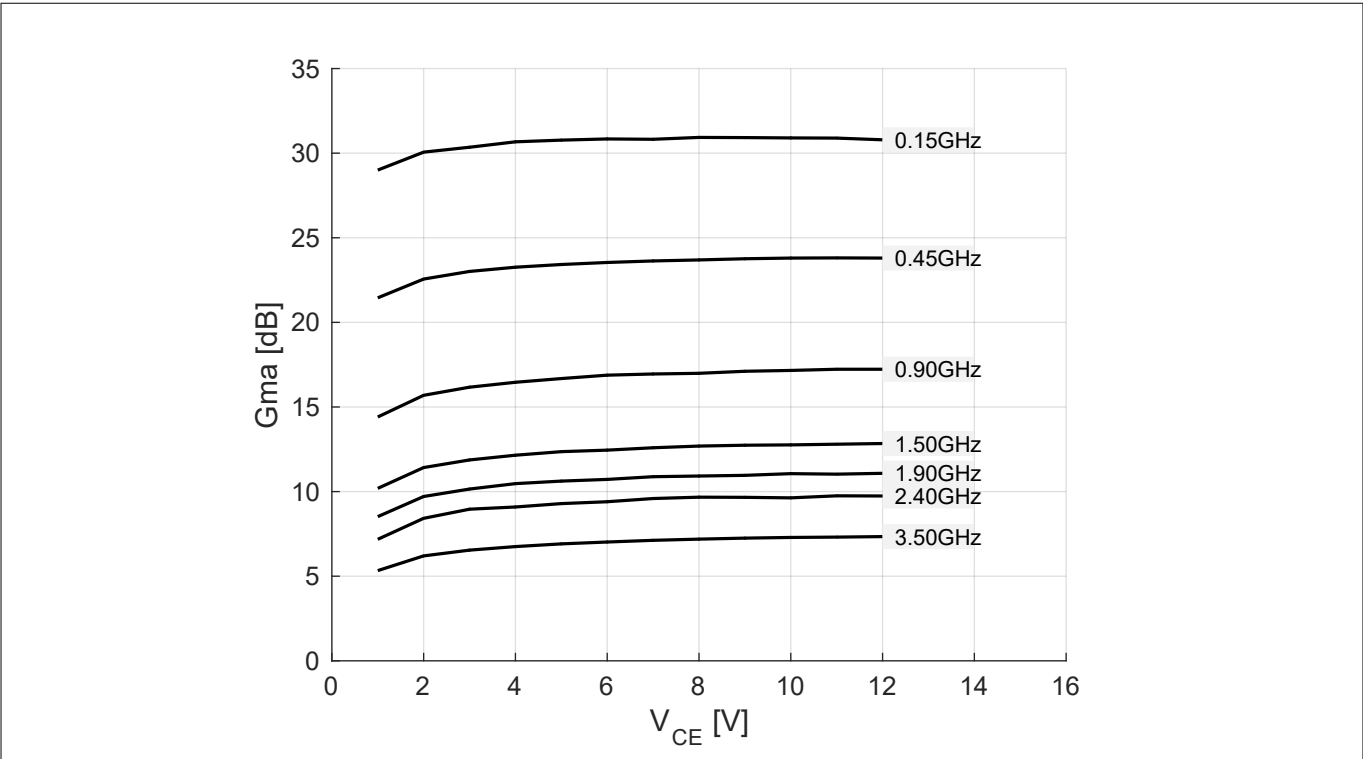


Figure 12 Maximum power gain $G_{max} = f(V_{CE})$, $I_C = 50\text{ mA}$, $f = \text{parameter}$

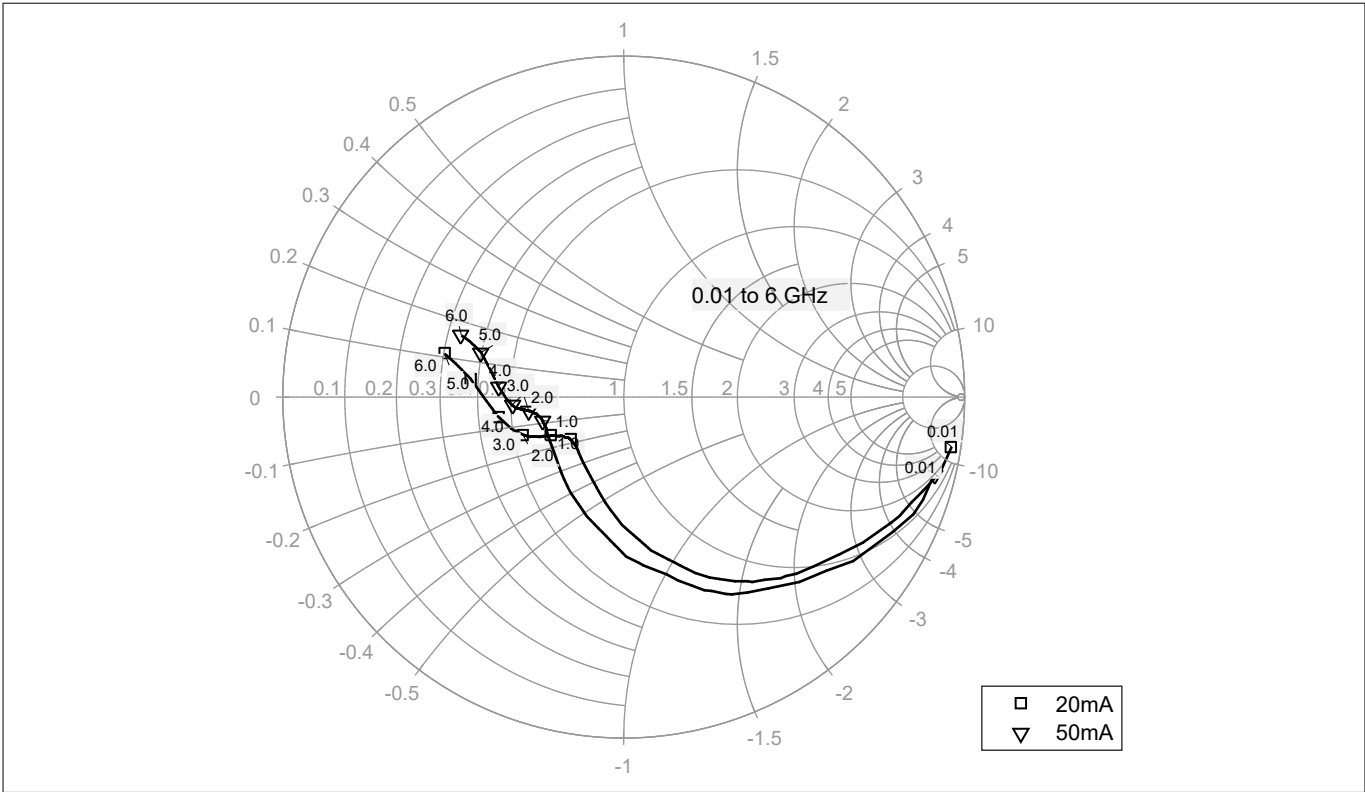


Figure 13 Output reflection coefficient $S_{22} = f(f)$ at $V_{CE} = 8\text{ V}$, $I_C = 20, 50\text{ mA}$

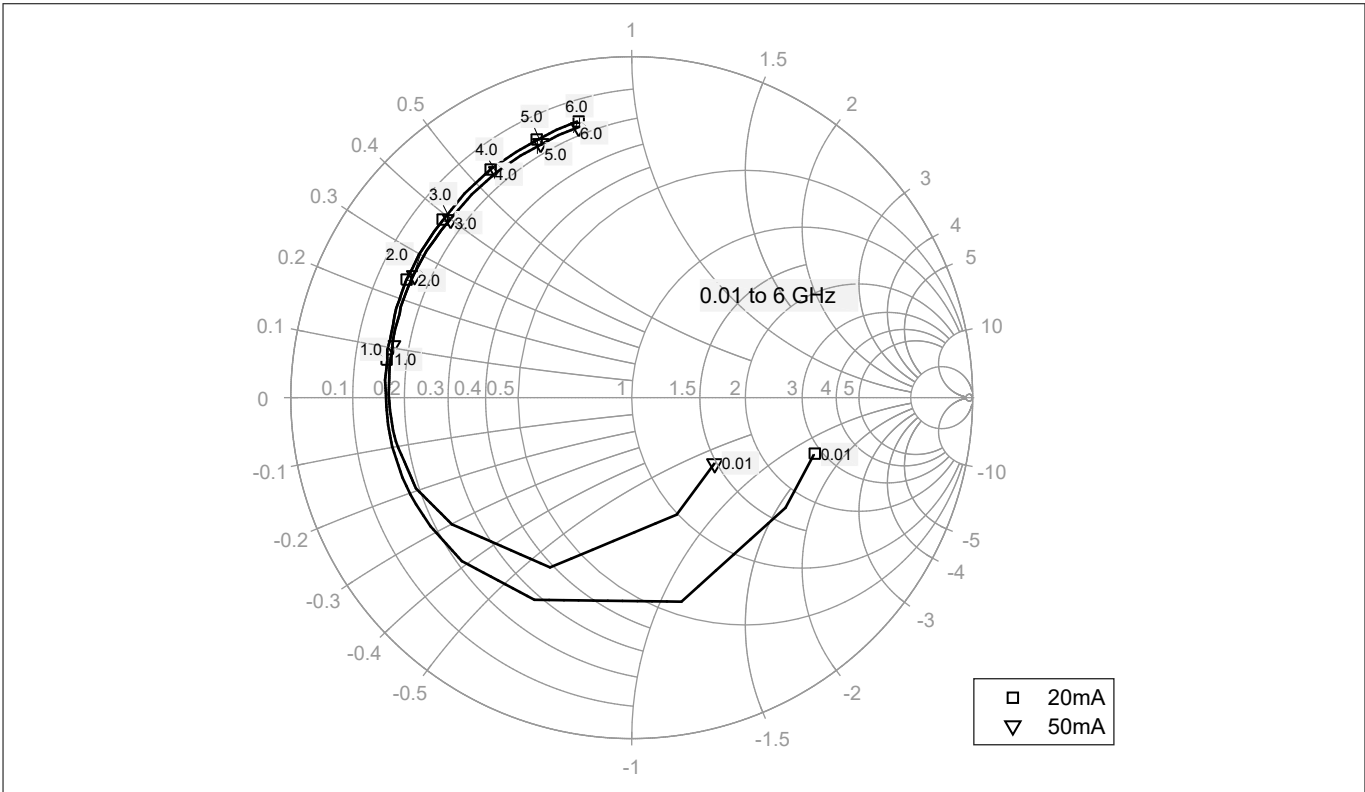


Figure 14 Input reflection coefficient $S_{11} = f(f)$ at $V_{CE} = 8\text{ V}$, $I_C = 20, 50\text{ mA}$

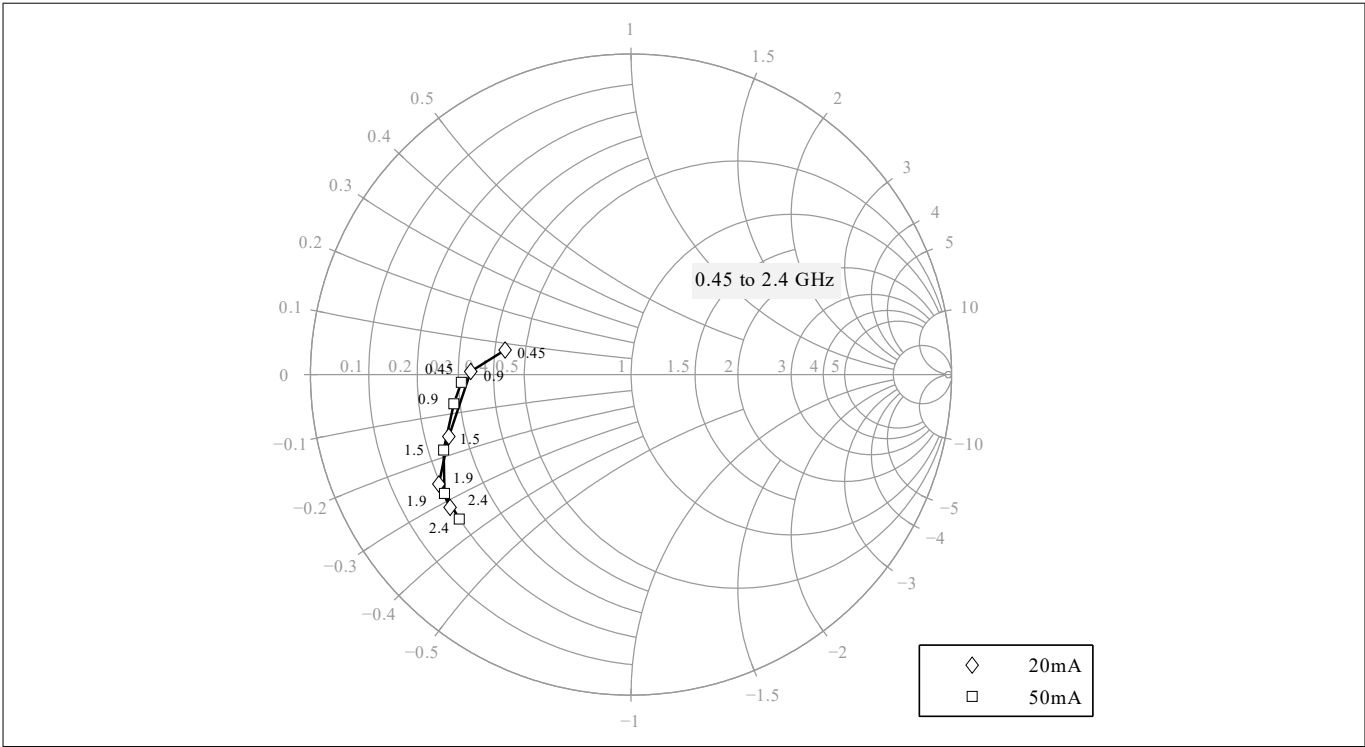


Figure 15 Source impedance for minimum noise figure $Z_{Sopt} = f(f)$, $V_{CE} = 8\text{ V}$, $I_C = 20, 50\text{ mA}$

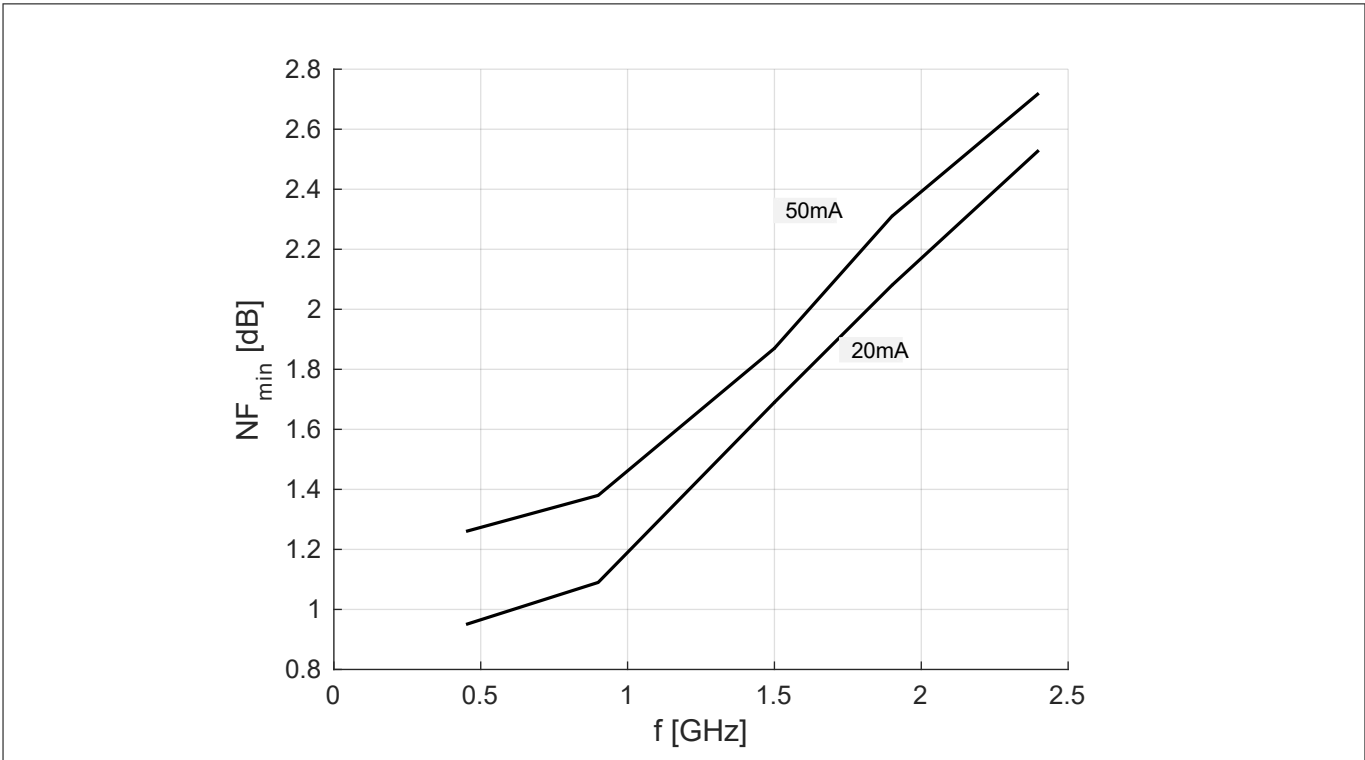


Figure 16 Noise figure $N_{Fmin} = f(f)$, $V_{CE} = 8\text{ V}$, $I_C = 20, 50\text{ mA}$, $Z_S = Z_{Sopt}$

BFP196WN

Low noise silicon bipolar RF transistor

Electrical performance in test fixture

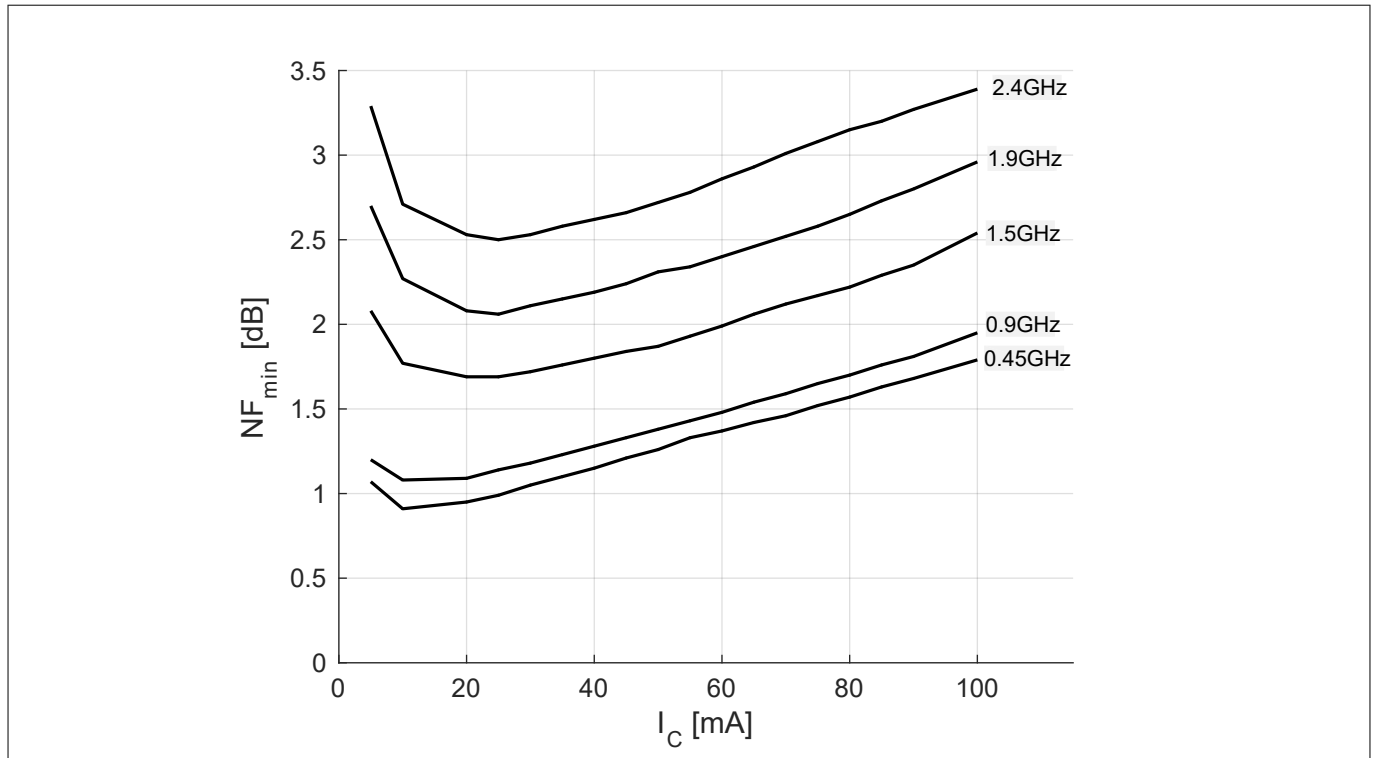


Figure 17 Noise figure $NF_{min} = f(I_C)$, $V_{CE} = 8\text{ V}$, $f = \text{parameter}$, $Z_S = Z_{Sopt}$

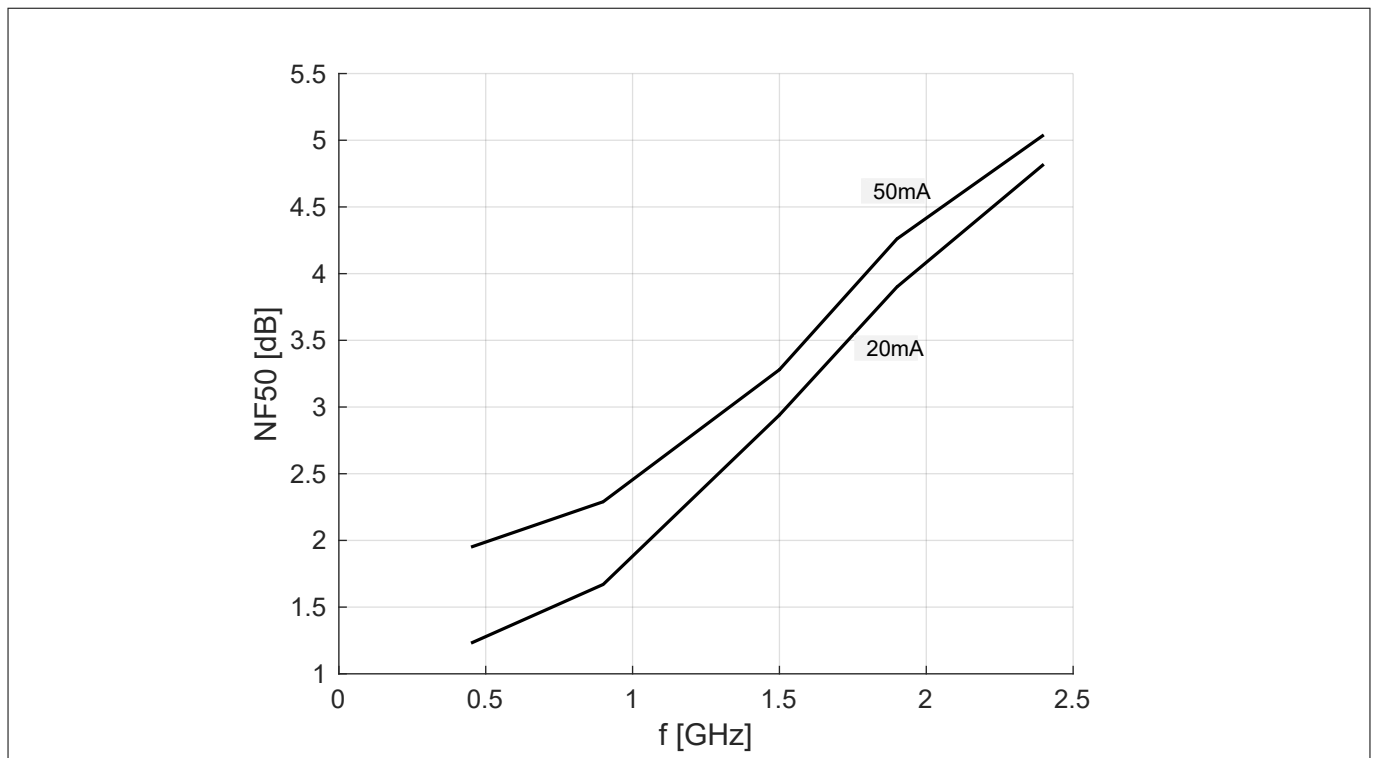


Figure 18 Noise figure $NF_{50} = f(f)$, $V_{CE} = 8\text{ V}$, $I_C = 20, 50\text{ mA}$, $Z_S = 50\ \Omega$


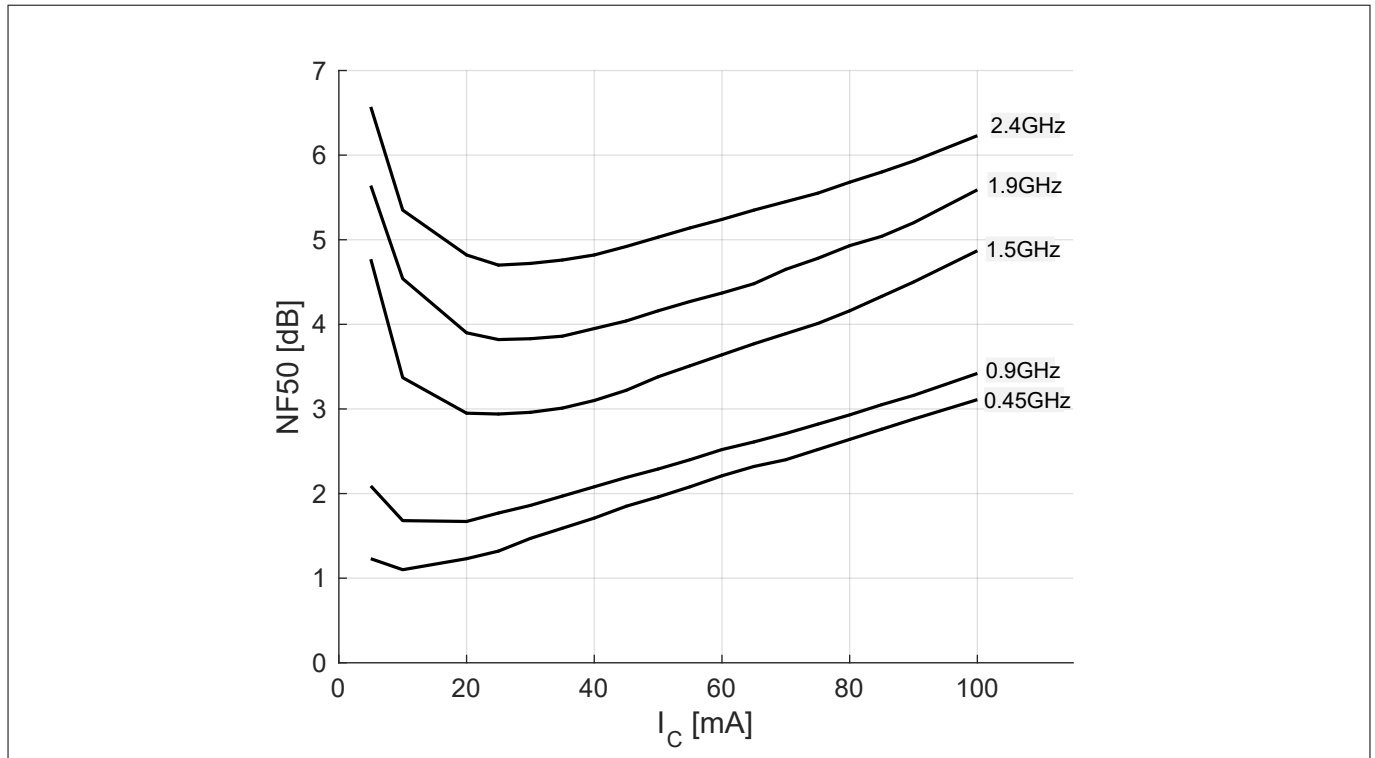


Figure 19 Noise figure $NF_{50} = f(I_C)$, $V_{CE} = 8\text{ V}$, $f = \text{parameter}$, $Z_S = 50\ \Omega$

Note: The curves shown in this chapter [Characteristic AC diagrams](#) have been generated using typical devices but shall not be understood as a guarantee that all devices have identical characteristic curves. $T_A = 25\ ^\circ\text{C}$.

4 Package information SOT343

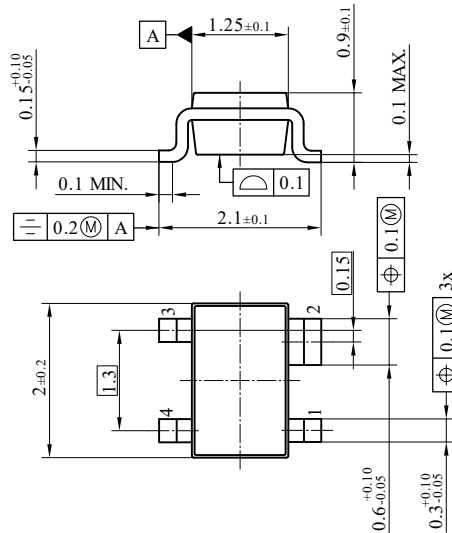

MOLD FLASH, PROTRUSION OR GATE BURRS OF 0.2 MM MAXIMUM PER SIDE ARE NOT INCLUDED
ALL DIMENSIONS ARE IN UNITS MM
THE DRAWING IS IN COMPLIANCE WITH ISO 128 & PROJECTION METHOD 1 []

Figure 20 **SOT343 package**

Note: For package information including footprint, packing and assembly recommendation refer to:

<https://www.infineon.com/cms/en/product/packages/PG-SOT343/PG-SOT343-4-1>

Revision history

Revision history

Major changes since previous revision

Document version	Date of release	Description of changes
1.0		First final datasheet version
2.0	2021-12-10	- Capacitance curve C_{cb} added. - Marking changed - Editorial changes, revision history updated
3.0	2024-07-01	Updated product validation

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2024-07-01

Published by

Infineon Technologies AG
81726 Munich, Germany

© 2024 Infineon Technologies AG
All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-kst1478698311373

Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.