
SK19661

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
9-15-16	NC	ECO 52624	CM	AP	CM

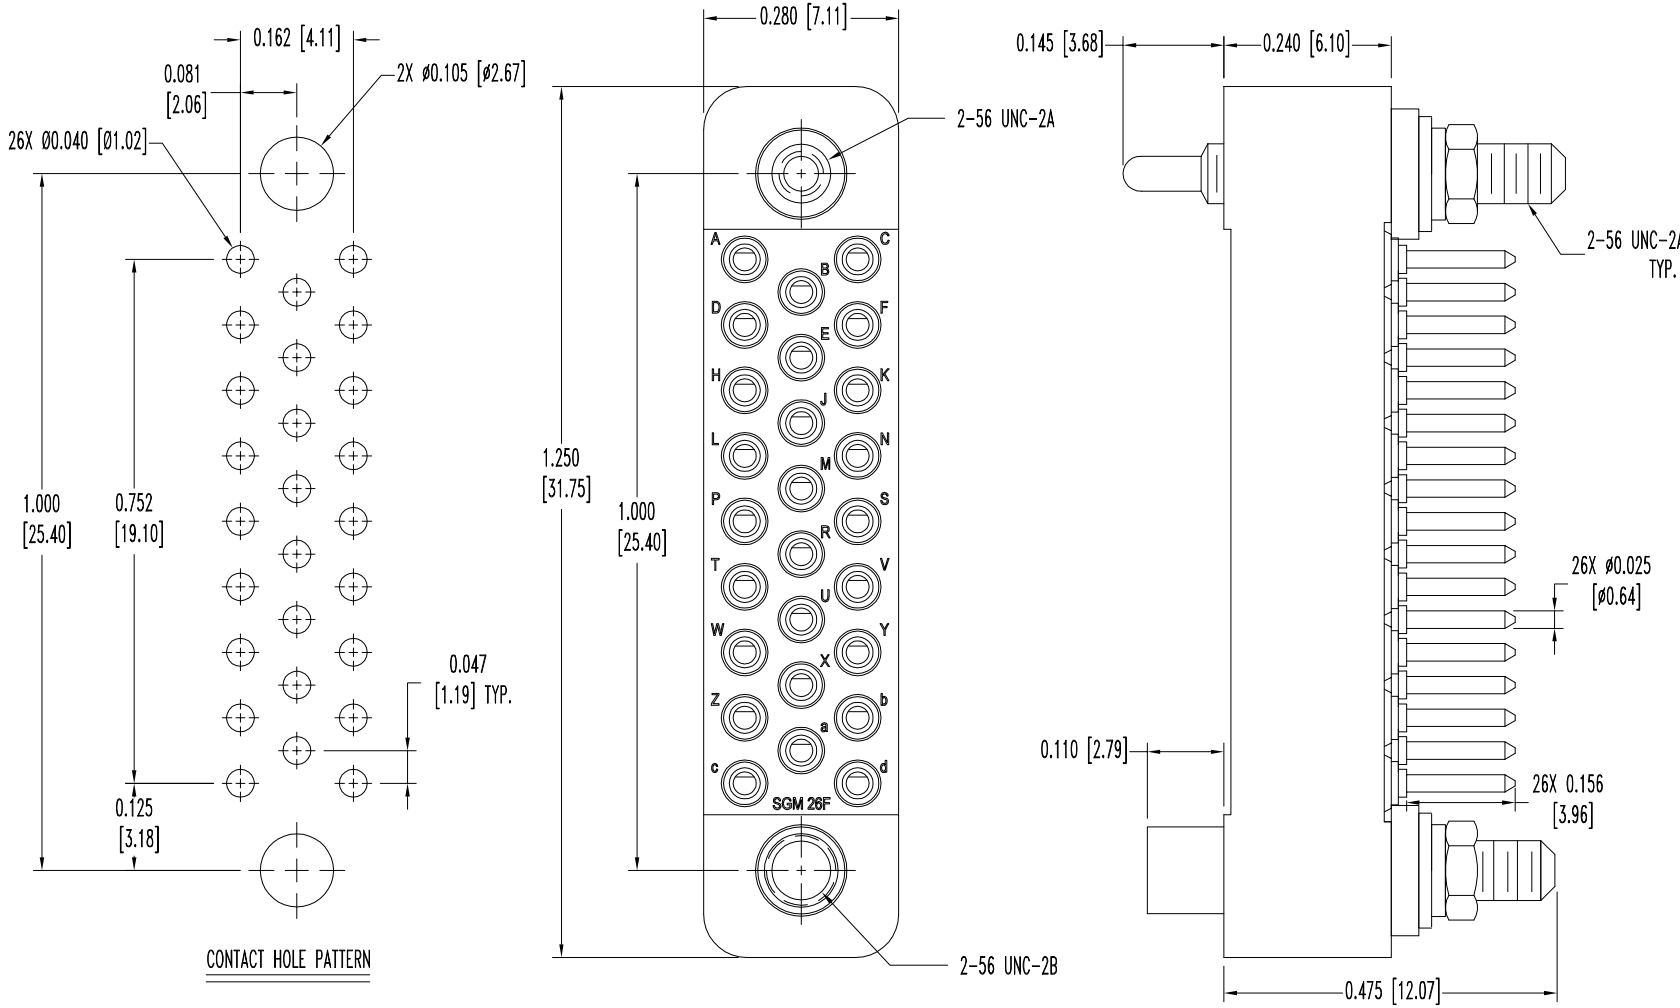

NOTES:

1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED DAP PER ASTM-D5948 TYPE SDG-F, COLOR: GREY.
   CONTACTS: PRECISION MACHINED COPPER ALLOY WITH BERYLLIUM COPPER CLIP, 0.000015 [0.38µ] GOLD OVER NICKEL PLATE.
   JACKSCREWS: STAINLESS STEEL, PASSIVATED.
   HEX NUTS AND WASHERS: NYLON.
2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY RECTANGULAR PRODUCT PUBLICATION AT CONNECTPOSITRONIC.COM.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com
FSCM 28198

DECIMAL TOL. ± 0.015 [0.38]	SGM SERIES	SCALE N.T.S.	DRAWN BY AP
			APPROVED BY CM
	TITLE SGM26SDS5T0000		
ANGULAR TOL. ± 5°	DATE 9-15-16	DRAWING NUMBER SK19661	REV. NC

Downloaded from Arrow.com.