



Parameters		Specification	Unit
Center frequency (Fo)		915.000	MHz
Bandwidth		26000	kHz
Insertion Loss in BW, Max		2.5	dB
Amplitude Ripple in BW, Max		1.8	dB
Attenuation, Minimum	10 MHz ~ 800 MHz	42	dB
	800 MHz ~ 845 MHz	40	dB
	845 MHz ~ 880 MHz	35	dB
	947 MHz ~ 970 MHz	13	dB
	970 MHz ~ 1020 MHz	33	dB
	1020 MHz ~ 1200 MHz	35	dB
DC voltage		0	V
Input Power, Max		15	dBm
In/Out Impedance		50	Ω
Operating temperature range		-40 to +85	$^{\circ}\text{C}$
Storage Temperature		-40 to +85	$^{\circ}\text{C}$

Dimension

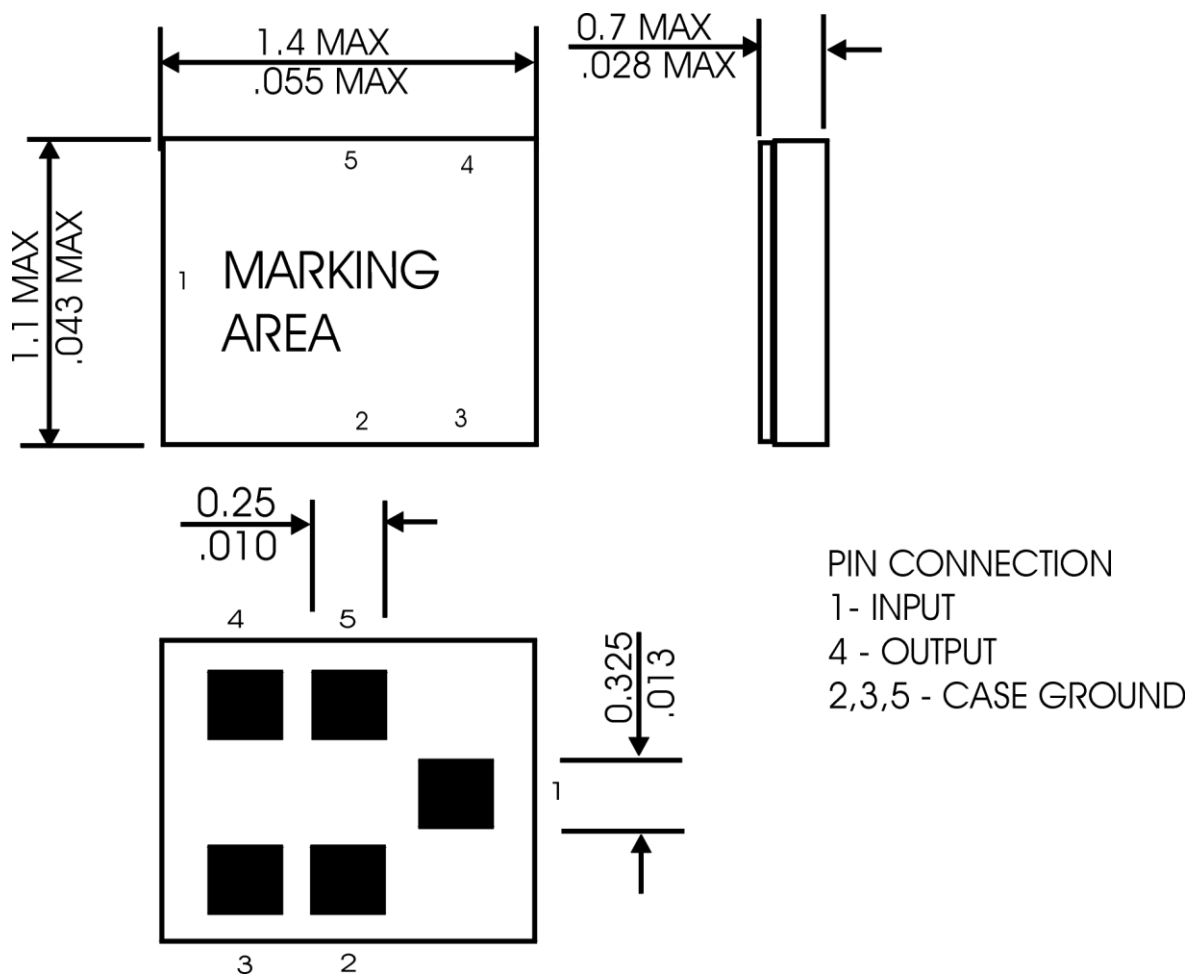


Frequency Characteristics


Transfer function

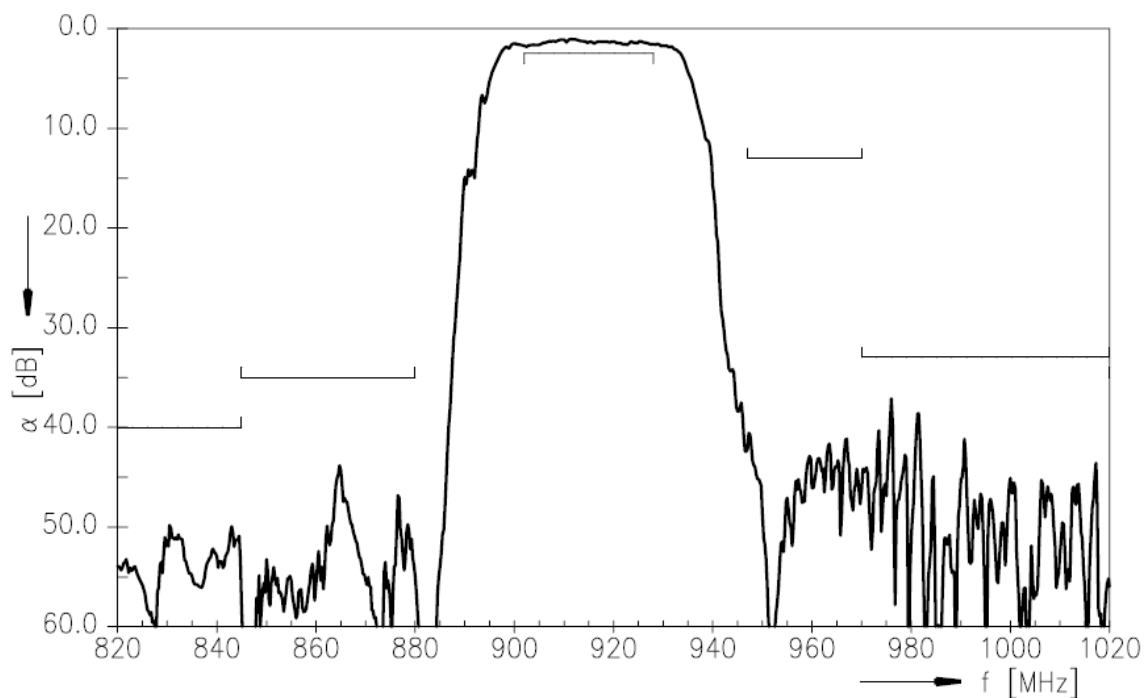

Transfer function (wideband)

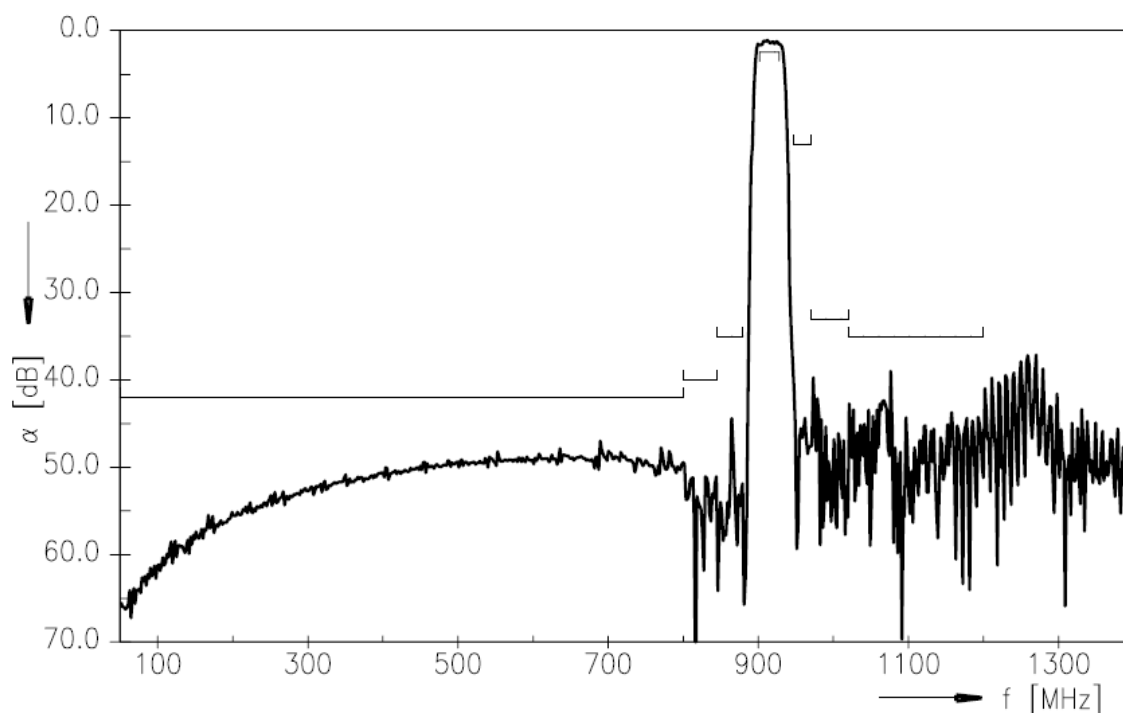

● REFLOW PROFILE

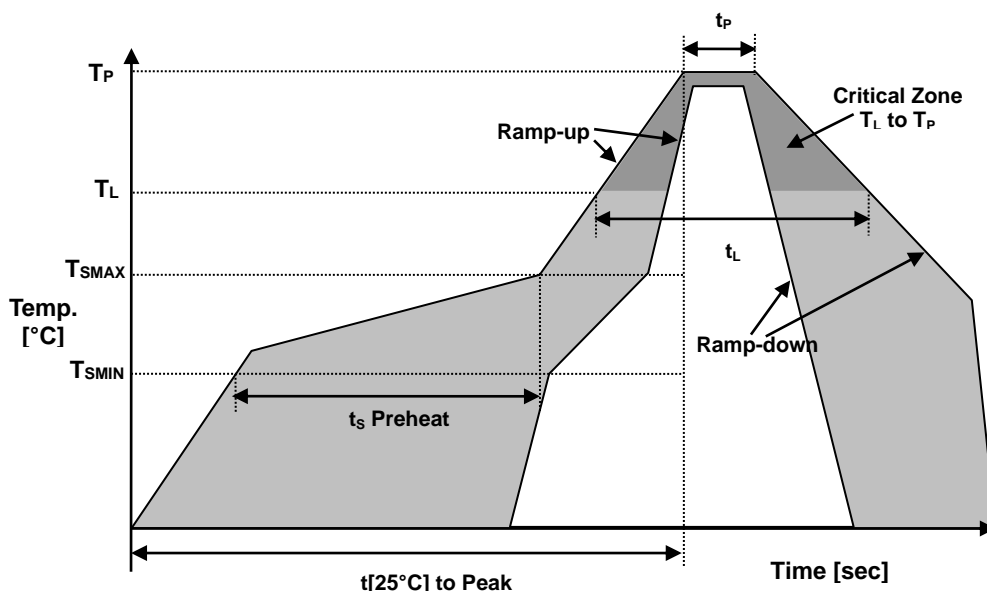

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_p	10 sec.
Time $t[25^\circ\text{C}]$ to Peak Temperature	$t[25^\circ\text{C}]$ to Peak	480 sec.
Time	t_L	60-150 sec.

Environmental

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
TERMINATION FINISH	Au
REACH – SVHC	Compliant
RoHS	Compliant
PACKAGING	TAPE & REEL



Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort to ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.

February 2021

RALTRON ELECTRONICS ■ 10400 N.W. 33rd Street ■ Miami, Florida 33172 ■ U.S.A.
Tel: 305-593-6033 ■ Fax: 305-594-3973 ■ e-mail: sales@raltron.com ■ internet: http://www.raltron.com