

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 1,85 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,45	0,05	3,10	0,10	2,40	0,10	3,30	0,10
1005 1,00		2,23	120	1,55	0,05	3,10	0,10	2,60	0,10	3,40	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

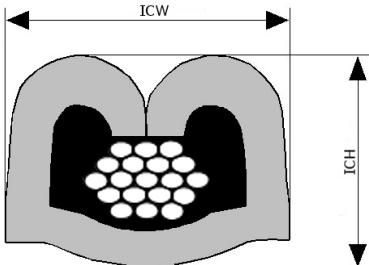

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office


Cable Type codes: 1005
Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED
Insulation Range Φ[mm]: 1,85 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,45	0,05	3,10	0,10	2,40	0,10	3,30	0,10
1005 1,00		2,23	120	1,55	0,05	3,10	0,10	2,60	0,10	3,40	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

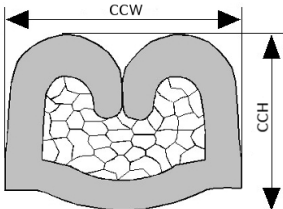

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
Insulation Range Φ[mm]: 1,85 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,45	0,05	3,10	0,10	2,40	0,10	3,30	0,10
1005 1,00		2,23	120	1,55	0,05	3,10	0,10	2,60	0,10	3,40	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

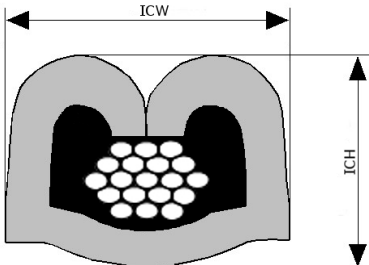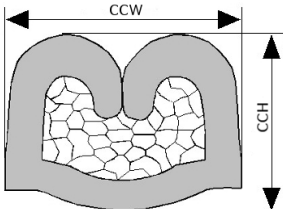

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 0,35 | 0,50 | 0,80

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005 + 1005
Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35 + 1005 0,35		1,60 + 1,60	55	1,30	0,05	3,15	0,10	2,20	0,10	3,60	0,10
1005 0,35 + 1005 0,80		1,60 + 2,03	55	1,40	0,05	3,20	0,10	2,70	0,10	3,80	0,10
1005 0,50 + 1005 0,50		1,74 + 1,74	80	1,50	0,05	3,30	0,10	2,60	0,10	4,00	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

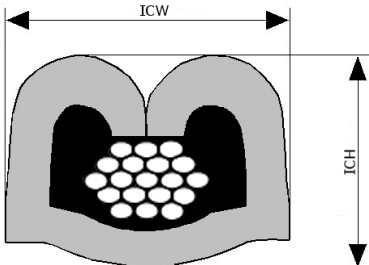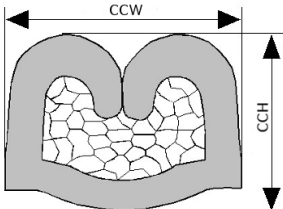

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1005 + 1005
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35 + 1005 0,35		1,60 + 1,60	55	1,30	0,05	3,15	0,10	2,20	0,10	3,60	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

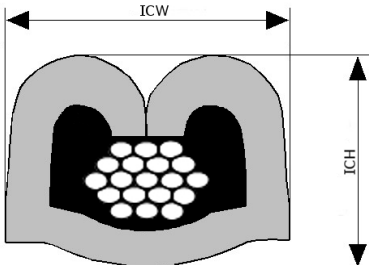

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1007
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 2,45 - 2,70
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 1,00		2,58	120	1,55	0,05	3,10	0,10	2,70	0,10	3,50	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

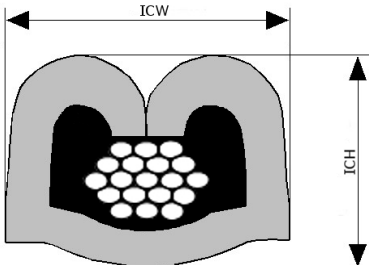

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1007
Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED
Insulation Range Φ[mm]: 2,20 - 2,70
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,45	0,05	3,10	0,10	2,40	0,10	3,60	0,10
1007 1,00		2,58	120	1,55	0,05	3,10	0,10	2,70	0,10	3,50	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

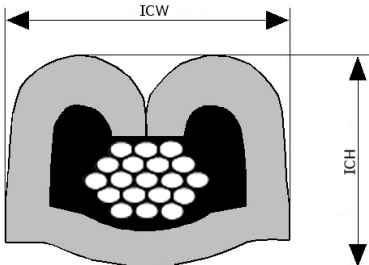

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 1007
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
Insulation Range Φ[mm]: 2,20 - 2,70
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,45	0,05	3,10	0,10	2,40	0,10	3,60	0,10
1007 1,00		2,58	120	1,55	0,05	3,10	0,10	2,70	0,10	3,50	0,10

Cable type code legend:

1007:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

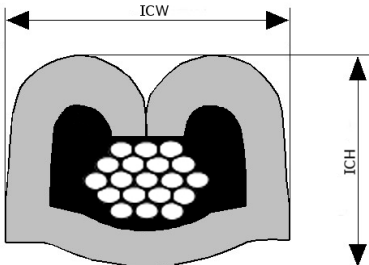

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1009
Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED
Insulation Range Φ[mm]: 2,50 - 3,05
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,80		2,78	90	1,45	0,05	3,10	0,10	2,40	0,10	3,60	0,10

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

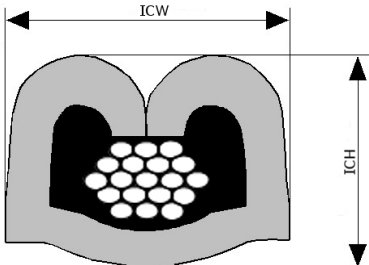

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1009
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
Insulation Range Φ[mm]: 2,50 - 3,05
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,80		2,78	90	1,45	0,05	3,10	0,10	2,40	0,10	3,60	0,10

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

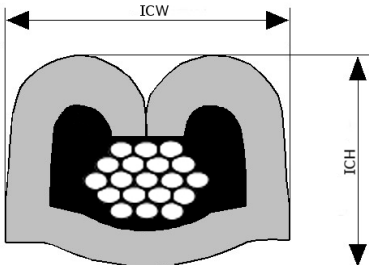

Terminal Part Number: 08917861

Surface Plating: SN

Material Thickness [mm]: 0,36

Cross Section [mm²]: 0,35 | 0,80

Cable Type codes: 1047 + 1005

Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED

Seal(s): NONE

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 + 1005 0,80		1,58 + 2,03	70	1,40	0,05	3,20	0,10	2,70	0,10	3,80	0,10

Cable type code legend:

1047:

Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: THIN

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

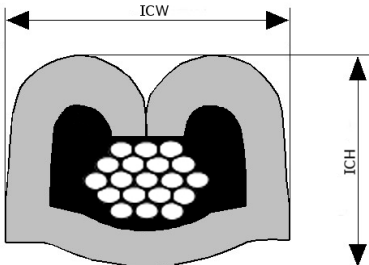

Terminal Part Number: 08917861

Surface Plating: SN

Material Thickness [mm]: 0,36

Cross Section [mm²]: 0,35

Cable Type codes: 1047 + 1047

Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED

Seal(s): NONE

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 + 1047 0,35		1,58 + 1,58	64	1,30	0,05	3,15	0,10	2,20	0,10	3,60	0,10

Cable type code legend:

1047:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: THIN

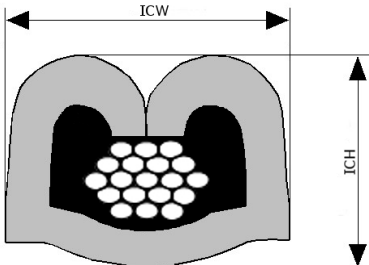

Terminal Part Number: 08917861

Surface Plating: SN

Material Thickness [mm]: 0,36

Cross Section [mm²]: 0,35

Cable Type codes: 1047 + 1047

Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED

Seal(s): NONE

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 + 1047 0,35		1,58 + 1,58	64	1,30	0,05	3,15	0,10	2,20	0,10	3,60	0,10

Cable type code legend:

1047:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: THIN

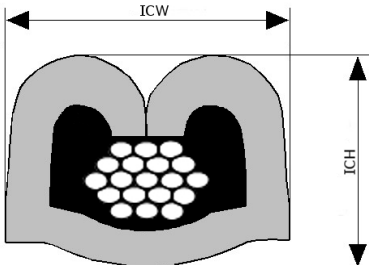

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2010
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,80 - 2,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 1,00		1,95	209	1,45	0,05	2,85	0,10	2,30	0,10	3,45	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR
(AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE,
XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

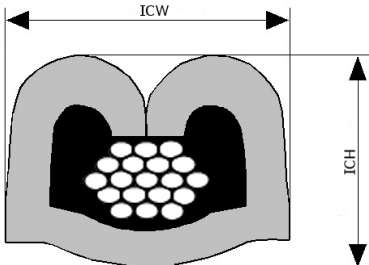

Terminal Part Number: 08917861
Surface Plating: SN
Material Thickness [mm]: 0,36
Cross Section [mm²]: 0,50 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2011
Crimp Process: (S) SOLDER - CRIMP AND SWEAT - CORE IS DIP SOLDERED
Insulation Range Φ[mm]: 2,00 - 2,70
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 0,50		2,15	80	1,10	0,05	3,10	0,10	2,40	0,10	3,70	0,10
2011 1,00		2,54	160	1,25	0,05	3,10	0,10	2,60	0,10	3,70	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: P/EST, PE, PVC, XLPE
Insul. Wall Designator: REGULAR

