

9155 MOBO® Solderless Battery Connectors




GENERAL DESCRIPTION

As an addition to our range of Battery connectors we have added a solderless termination option. This option has the termination area gold plated and the contact form is compression to the PCB and to the Battery which is used in the end equipment.

Rated at 3 Amps and 5,000 operations (the same as the SMT version). These battery connectors compliment the existing standard range of RoHS compliant components giving the designer an added option of the solderless termination.

When these connectors are held in place by the casing of the end equipment, the connection to the PCB is achieved by compressing the connector contacts against the PCB and against the actual battery. It is the housing which maintains the connection.

58 9155 004 000 020

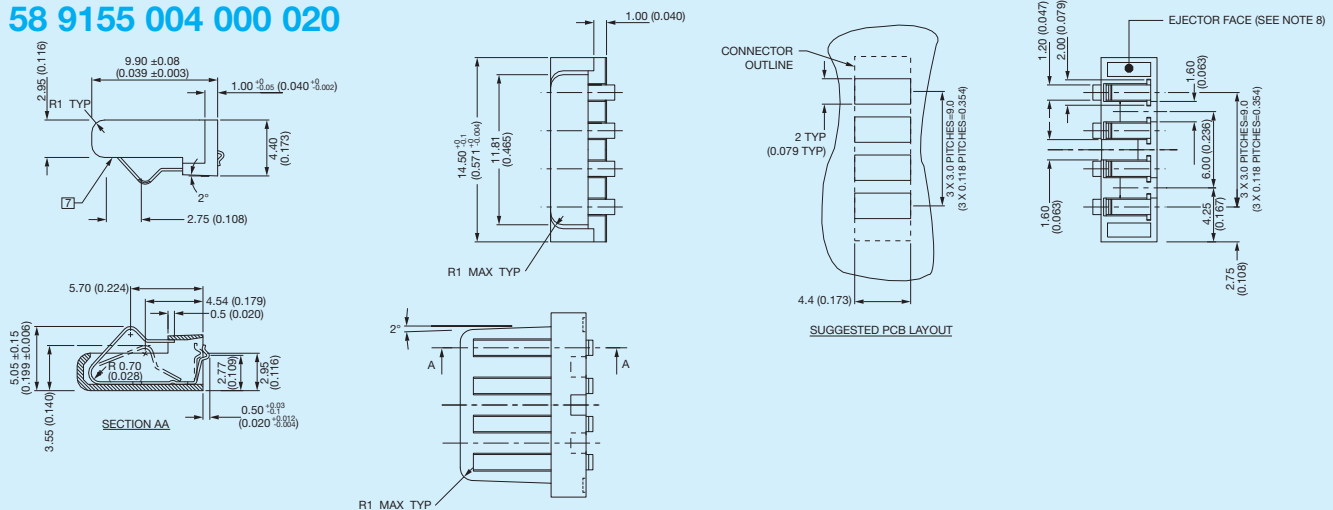

58 9155 003 000 053

