

IGBT – Field Stop II

NGTB40N120FL2WG

This Insulated Gate Bipolar Transistor (IGBT) features a robust and cost effective Field Stop II Trench construction, and provides superior performance in demanding switching applications, offering both low on state voltage and minimal switching loss. The IGBT is well suited for UPS and solar applications. Incorporated into the device is a soft and fast co-packaged free wheeling diode with a low forward voltage.

Features

- Extremely Efficient Trench with Field Stop Technology
- $T_{Jmax} = 175\text{ }^{\circ}\text{C}$
- Soft Fast Reverse Recovery Diode
- Optimized for High Speed Switching
- 10 μs Short Circuit Capability
- These are Pb-Free Devices

Typical Applications



- Solar Inverter
- Uninterruptible Power Inverter Supplies (UPS)
- Welding

ABSOLUTE MAXIMUM RATINGS

Symbol	Rating	Value	Unit
V_{CES}	Collector-emitter Voltage	1200	V
I_C	Collector Current @ $T_C = 25\text{ }^{\circ}\text{C}$ @ $T_C = 100\text{ }^{\circ}\text{C}$	80 40	A
I_{CM}	Pulsed Collector Current, T_{pulse} Limited by T_{Jmax}	200	A
I_F	Diode Forward Current @ $T_C = 25\text{ }^{\circ}\text{C}$ @ $T_C = 100\text{ }^{\circ}\text{C}$	80 40	A
I_{FM}	Diode Pulsed Current, T_{pulse} Limited by T_{Jmax}	200	A
V_{GE}	Gate-emitter Voltage Transient Gate-emitter Voltage ($T_{pulse} = 5\text{ }\mu\text{s}$, $D < 0.10$)	± 20 ± 30	V
P_D	Power Dissipation @ $T_C = 25\text{ }^{\circ}\text{C}$ @ $T_C = 100\text{ }^{\circ}\text{C}$	535 267	W
T_{SC}	Short Circuit Withstand Time $V_{GE} = 15\text{ V}$, $V_{CE} = 500\text{ V}$, $T_J \leq 150\text{ }^{\circ}\text{C}$	10	μs
T_J	Operating Junction Temperature Range	-55 to $+175$	$^{\circ}\text{C}$
T_{stg}	Storage Temperature Range	-55 to $+175$	$^{\circ}\text{C}$
T_{SLD}	Lead temperature for soldering, 1/8" from case for 5 seconds	260	$^{\circ}\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

40 A, 1200 V
 $V_{CEsat} = 2.0\text{ V}$
 $E_{off} = 1.1\text{ mJ}$



MARKING DIAGRAM



40N120FL2 = Specific Device Code
A = Assembly Location
Y = Year
WW = Work Week
G = Pb-Free Package

ORDERING INFORMATION

Device	Package	Shipping
NGTB40N120FL2WG	TO-247 (Pb-Free)	30 Units / Rail

NGTB40N120FL2WG

THERMAL CHARACTERISTICS

Symbol	Rating	Value	Unit
$R_{\theta JC}$	Thermal resistance junction-to-case, for IGBT	0.28	$^{\circ}\text{C/W}$
$R_{\theta JC}$	Thermal resistance junction-to-case, for Diode	0.5	$^{\circ}\text{C/W}$
$R_{\theta JA}$	Thermal resistance junction-to-ambient	40	$^{\circ}\text{C/W}$

ELECTRICAL CHARACTERISTICS ($T_J = 25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
--------	-----------	-----------------	-----	-----	-----	------

STATIC CHARACTERISTIC

$V_{(BR)CES}$	Collector-emitter breakdown voltage, gate-emitter short-circuited	$V_{GE} = 0\text{ V}, I_C = 500\text{ }\mu\text{A}$	1200			V
V_{CEsat}	Collector-emitter saturation voltage	$V_{GE} = 15\text{ V}, I_C = 40\text{ A}$ $V_{GE} = 15\text{ V}, I_C = 40\text{ A}, T_J = 175^{\circ}\text{C}$		2.00 2.40	2.40	V
$V_{GE(th)}$	Gate-emitter threshold voltage	$V_{GE} = V_{CE}, I_C = 400\text{ }\mu\text{A}$	4.5	5.5	6.5	V
I_{CES}	Collector-emitter cut-off current, gate-emitter short-circuited	$V_{GE} = 0\text{ V}, V_{CE} = 1200\text{ V}$ $V_{GE} = 0\text{ V}, V_{CE} = 1200\text{ V}, T_J = 175^{\circ}\text{C}$		2	0.1	mA
I_{GES}	Gate leakage current, collector-emitter short-circuited	$V_{GE} = 20\text{ V}, V_{CE} = 0\text{ V}$			200	nA

DYNAMIC CHARACTERISTIC

C_{ies}	Input capacitance	$V_{CE} = 20\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$		7385		pF
C_{oes}	Output capacitance			230		
C_{res}	Reverse transfer capacitance			140		
Q_g	Gate charge total	$V_{CE} = 600\text{ V}, I_C = 40\text{ A}, V_{GE} = 15\text{ V}$		313		nC
Q_{ge}	Gate to emitter charge			61		
Q_{gc}	Gate to collector charge			151		

SWITCHING CHARACTERISTIC, INDUCTIVE LOAD

$t_{d(on)}$	Turn-on delay time	$T_J = 25^{\circ}\text{C}$ $V_{CC} = 600\text{ V}, I_C = 40\text{ A}$ $R_g = 10\text{ }\Omega$ $V_{GE} = 0\text{ V}/15\text{ V}$		116		ns
t_r	Rise time			42		
$t_{d(off)}$	Turn-off delay time			286		
t_f	Fall time			121		
E_{on}	Turn-on switching loss			3.4		
E_{off}	Turn-off switching loss	$T_J = 175^{\circ}\text{C}$ $V_{CC} = 600\text{ V}, I_C = 40\text{ A}$ $R_g = 10\text{ }\Omega$ $V_{GE} = 0\text{ V}/15\text{ V}$		1.1		mJ
E_{ts}	Total switching loss			4.5		
$t_{d(on)}$	Turn-on delay time			111		ns
t_r	Rise time			43		
$t_{d(off)}$	Turn-off delay time			304		
t_f	Fall time			260		
E_{on}	Turn-on switching loss			4.4		mJ
E_{off}	Turn-off switching loss			2.5		
E_{ts}	Total switching loss			6.9		

DIODE CHARACTERISTIC

V_F	Forward voltage	$V_{GE} = 0\text{ V}, I_F = 40\text{ A}$ $V_{GE} = 0\text{ V}, I_F = 50\text{ A}, T_J = 175^{\circ}\text{C}$		2.00 2.30	2.6	V
t_{rr}	Reverse recovery time	$T_J = 25^{\circ}\text{C}$ $I_F = 40\text{ A}, V_R = 400\text{ V}$ $di_F/dt = 200\text{ A}/\mu\text{s}$		240		ns
Q_{rr}	Reverse recovery charge			2.5		μC
I_{rrm}	Reverse recovery current			18		A
t_{rr}	Reverse recovery time	$T_J = 175^{\circ}\text{C}$ $I_F = 40\text{ A}, V_R = 400\text{ V}$ $di_F/dt = 200\text{ A}/\mu\text{s}$		392		ns
Q_{rr}	Reverse recovery charge			5.36		μC
I_{rrm}	Reverse recovery current			25.80		A

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.



TYPICAL CHARACTERISTICS

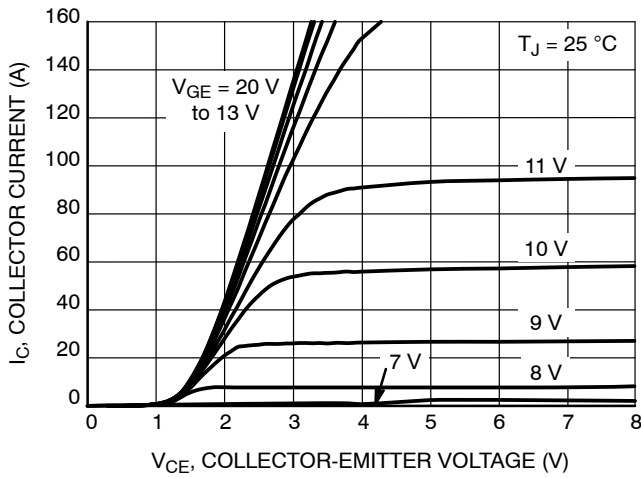


Figure 1. Output Characteristics

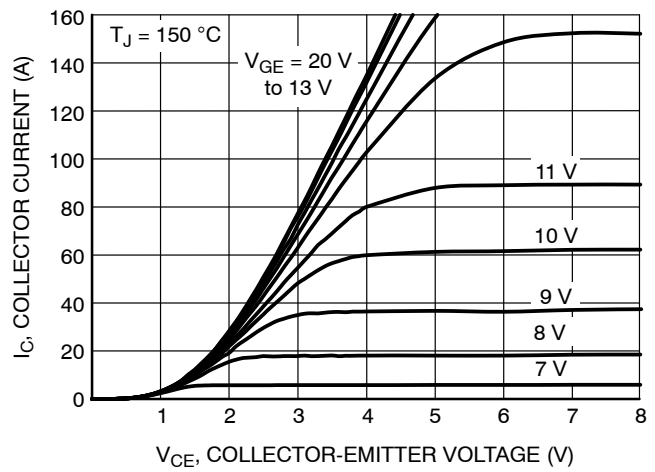


Figure 2. Output Characteristics

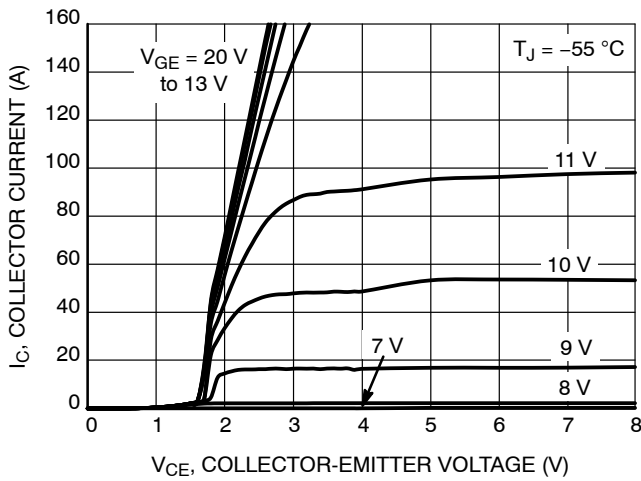


Figure 3. Output Characteristics

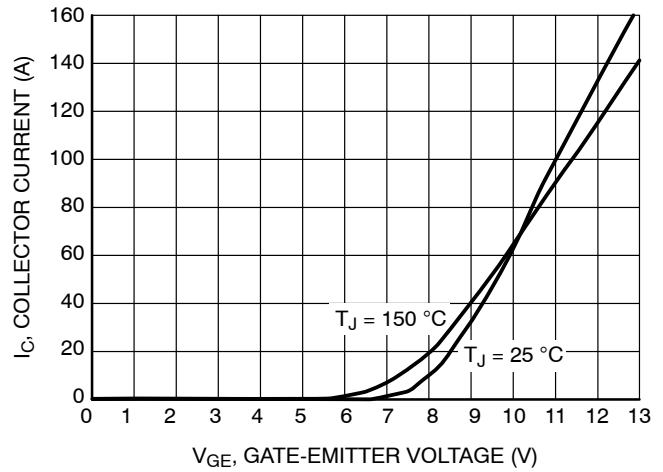


Figure 4. Typical Transfer Characteristics

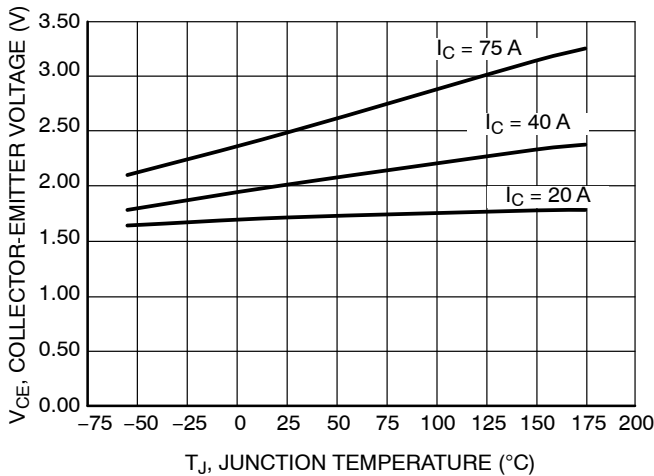


Figure 5. $V_{CE(sat)}$ vs T_J

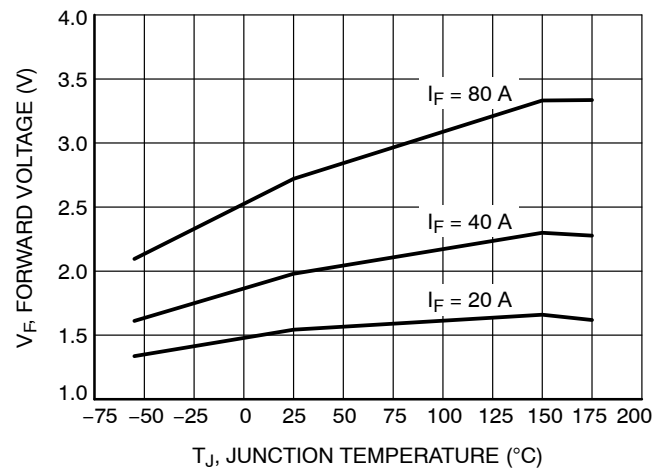


Figure 6. V_F vs. T_J

NGTB40N120FL2WG

TYPICAL CHARACTERISTICS (continued)

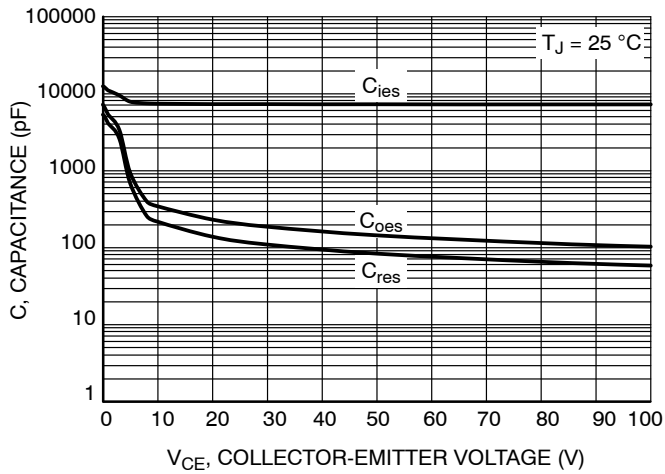


Figure 7. Typical Capacitance

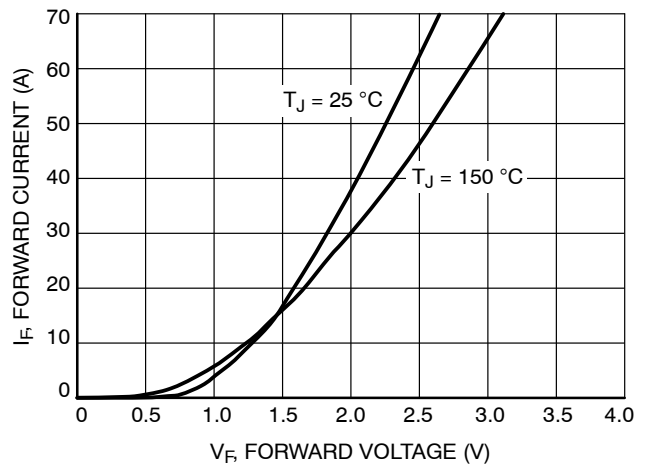


Figure 8. Diode Forward Characteristics

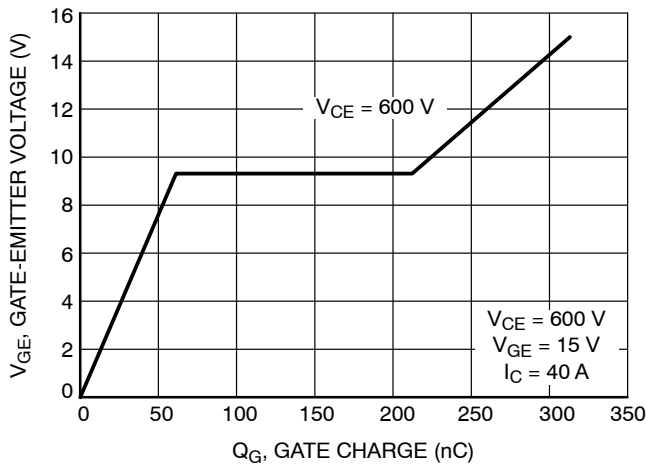


Figure 9. Typical Gate Charge

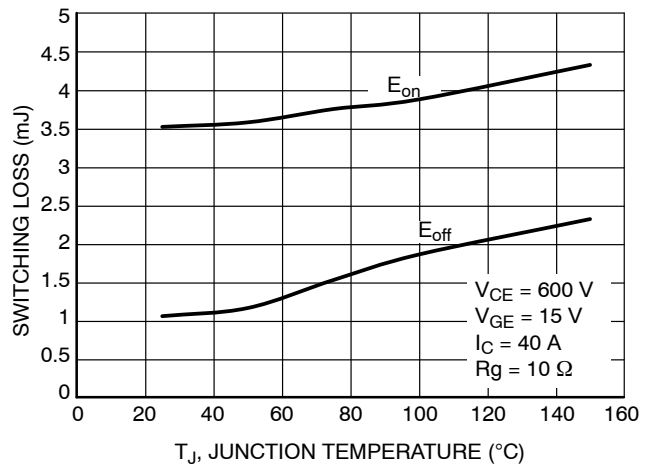


Figure 10. Switching Loss vs. Temperature

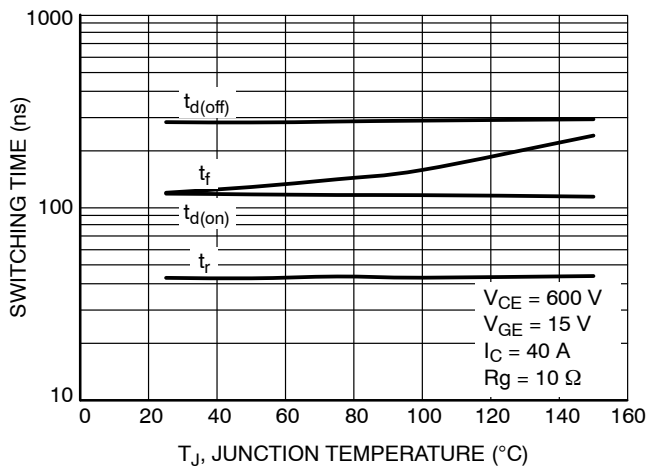


Figure 11. Switching Time vs. Temperature

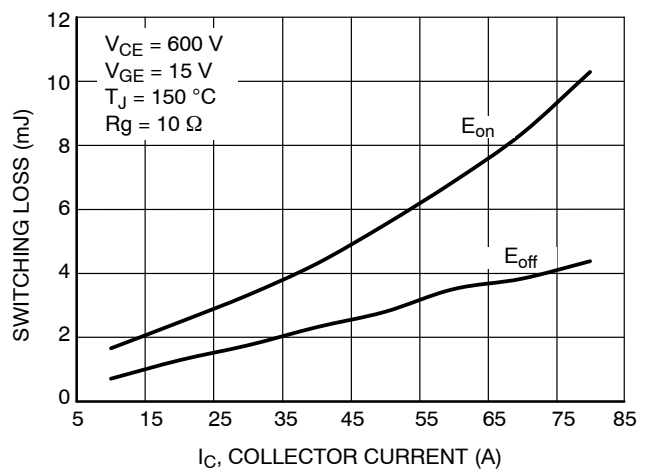


Figure 12. Switching Loss vs. I_C

NGTB40N120FL2WG

TYPICAL CHARACTERISTICS (continued)

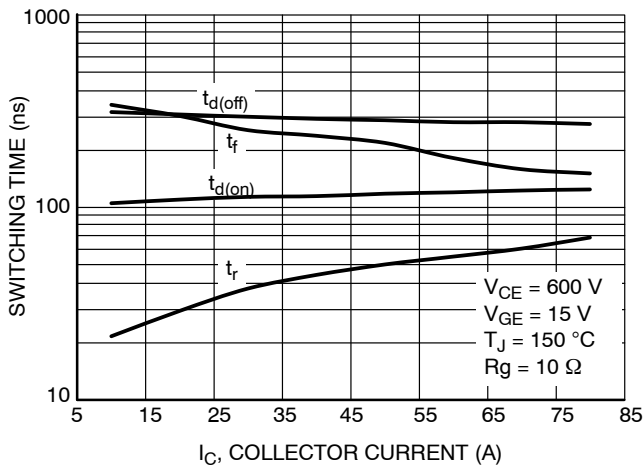


Figure 13. Switching Time vs. I_C

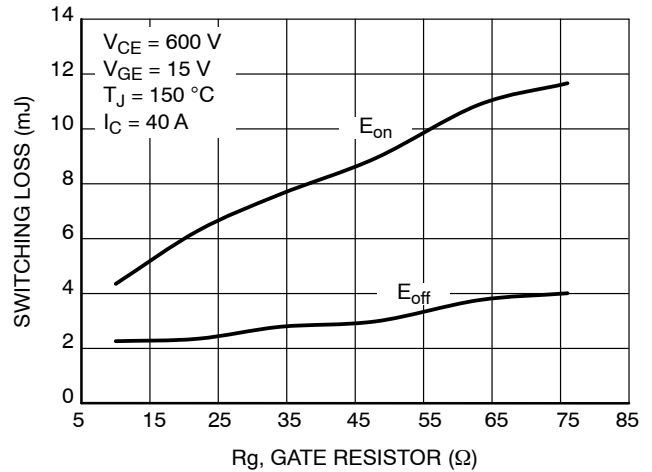


Figure 14. Switching Loss vs. R_g

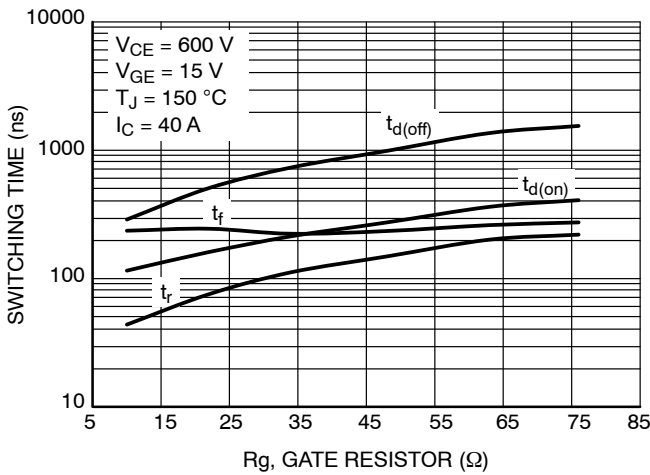


Figure 15. Switching Time vs. R_g

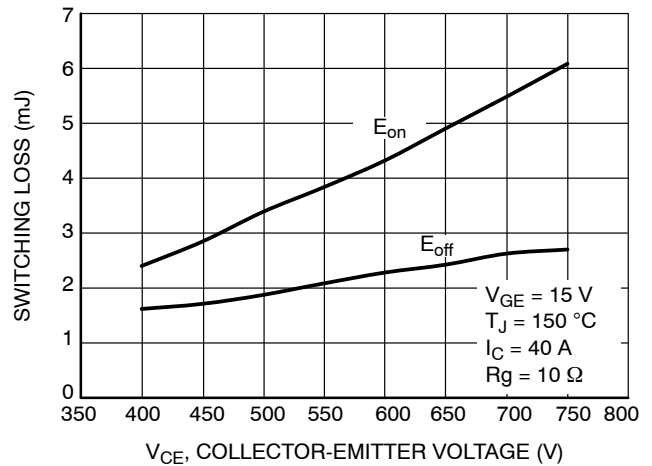


Figure 16. Switching Loss vs. V_{CE}

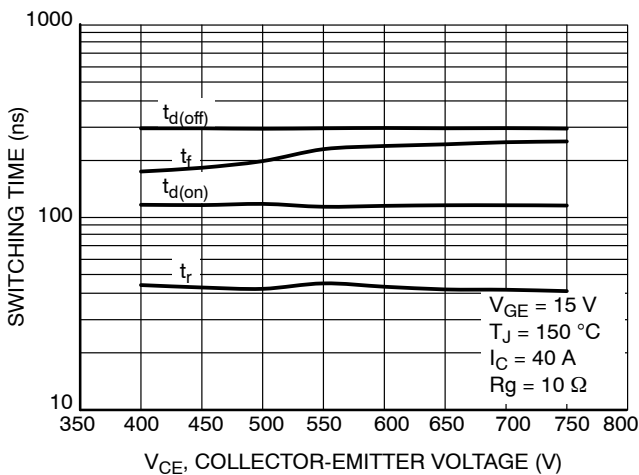


Figure 17. Switching Time vs. V_{CE}

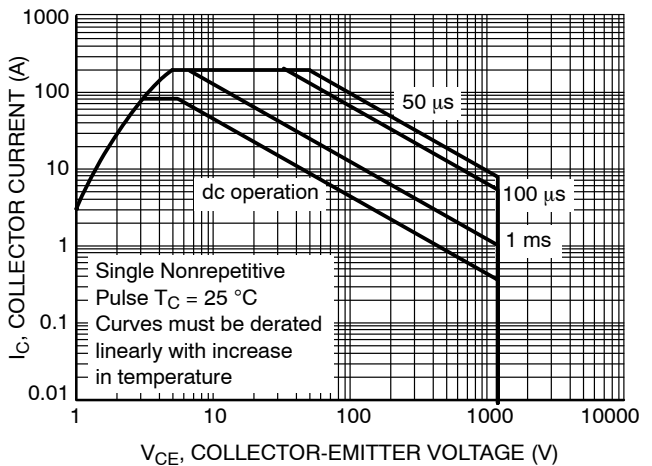


Figure 18. Safe Operating Area

NGTB40N120FL2WG

TYPICAL CHARACTERISTICS (continued)

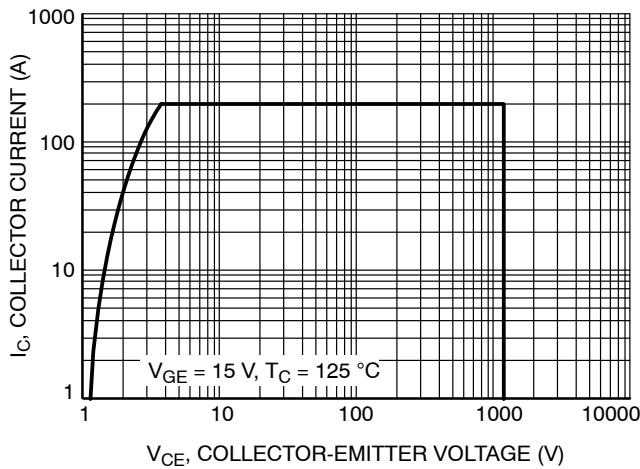


Figure 19. Reverse Bias Safe Operating Area

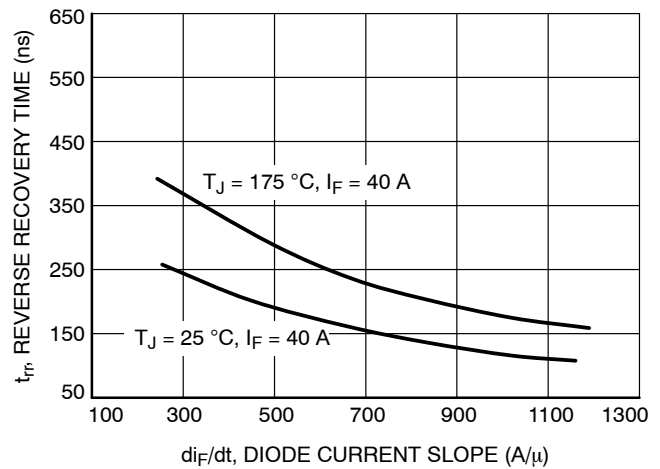


Figure 20. t_{rr} vs. di_F/dt ($V_R = 400$ V)

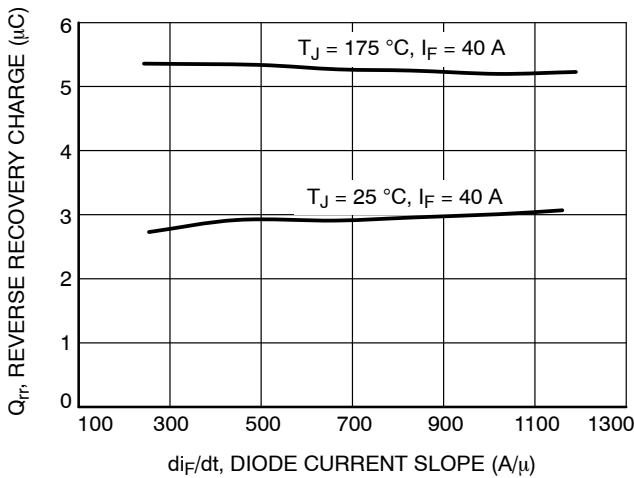


Figure 21. Q_{rr} vs. di_F/dt ($V_R = 400$ V)

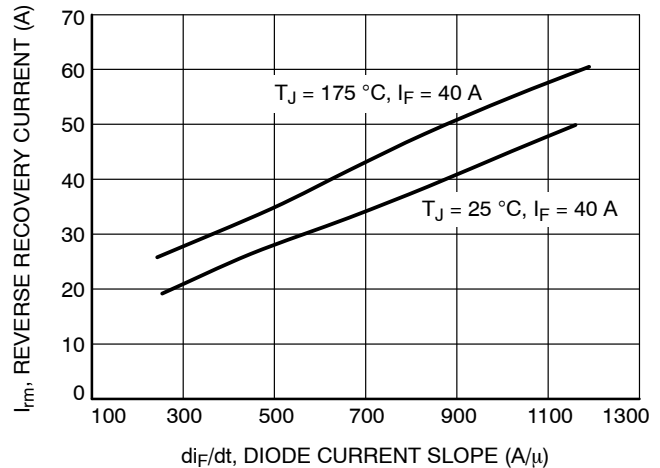


Figure 22. I_{rm} vs. di_F/dt ($V_R = 400$ V)

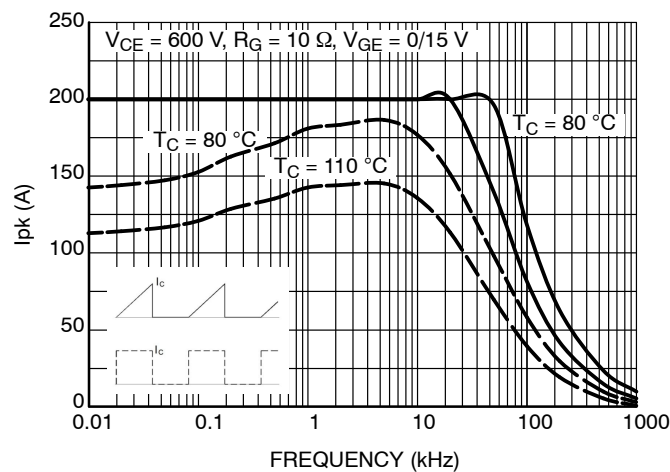


Figure 23. Collector Current vs. Switching Frequency

NGTB40N120FL2WG

TYPICAL CHARACTERISTICS (continued)

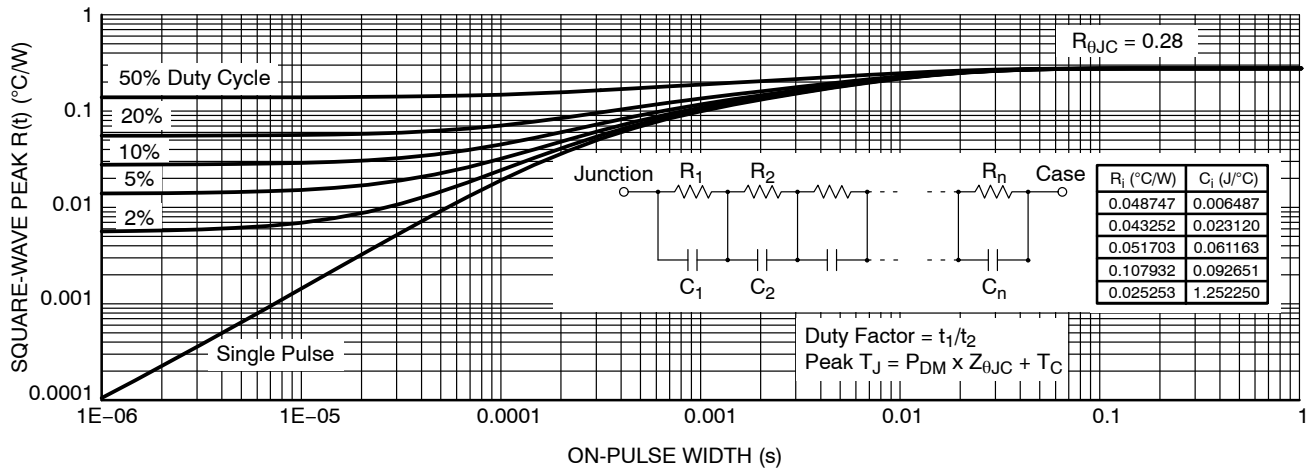


Figure 24. IGBT Transient Thermal Impedance

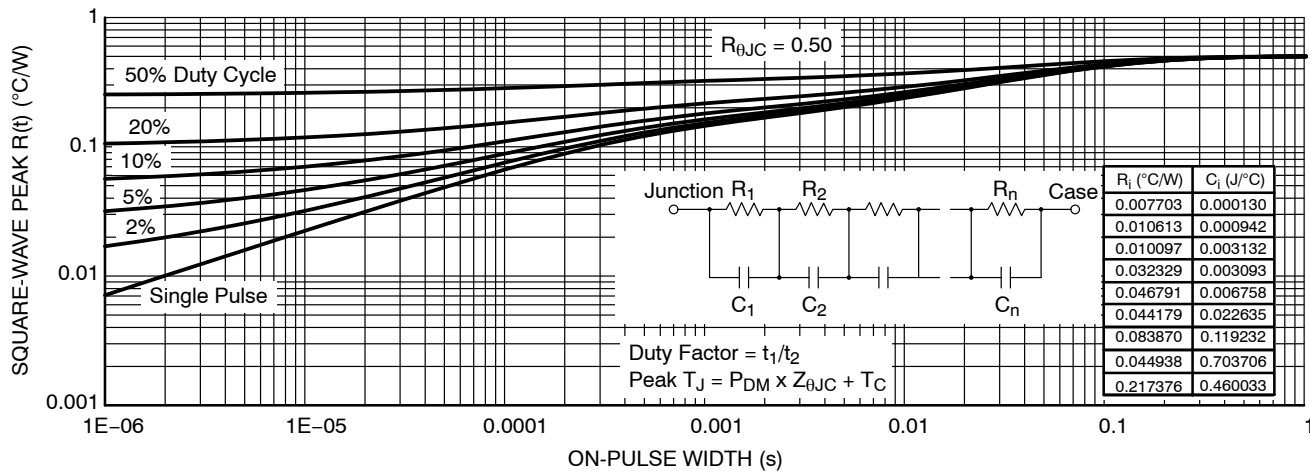


Figure 25. Diode Transient Thermal Impedance

NGTB40N120FL2WG

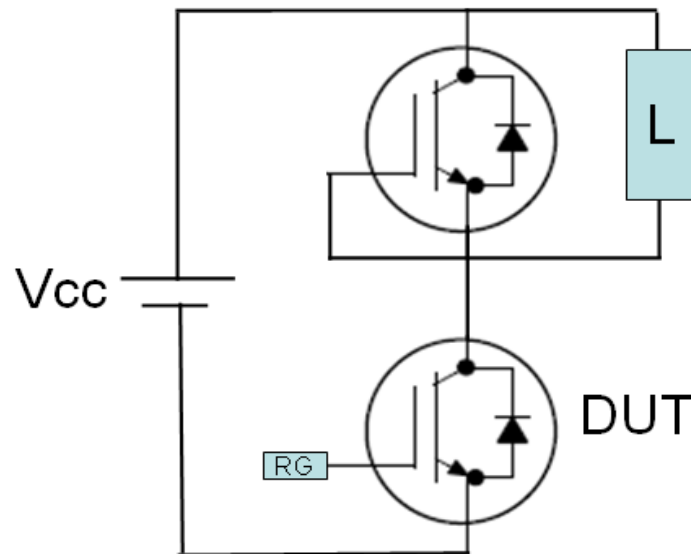


Figure 26. Test Circuit for Switching Characteristics

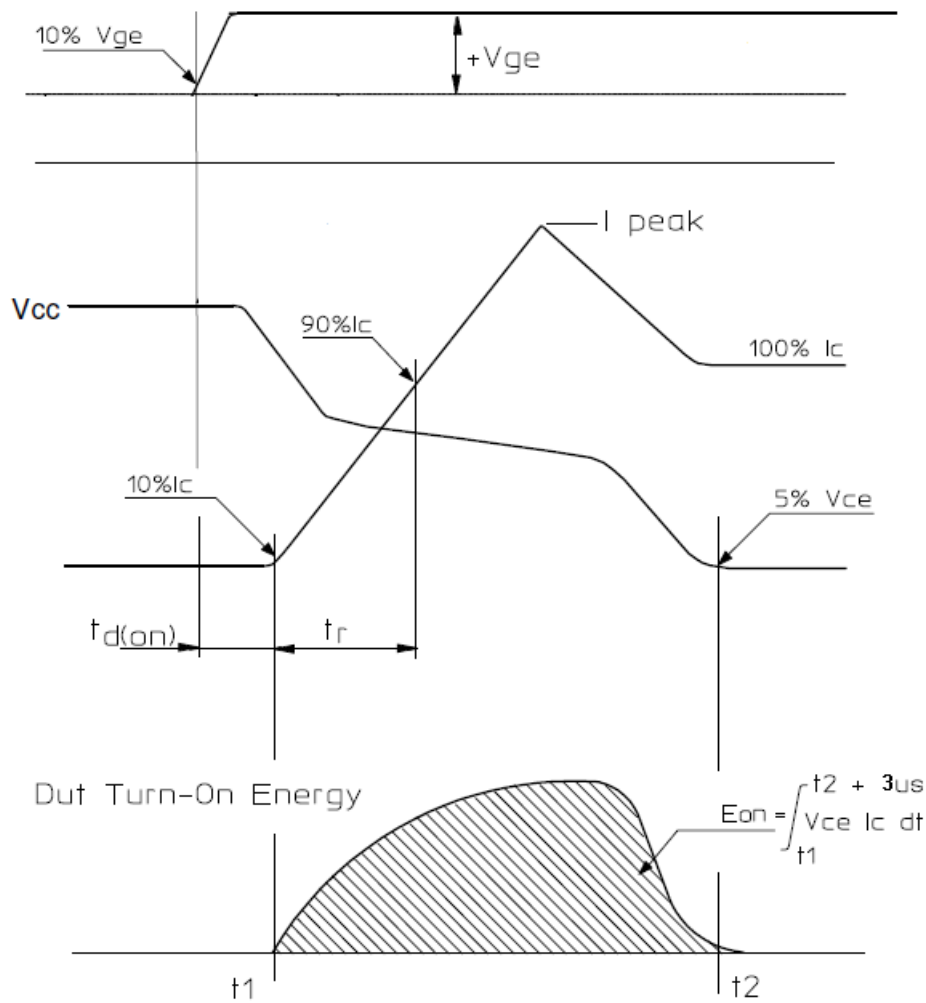


Figure 27. Definition of Turn On Waveform

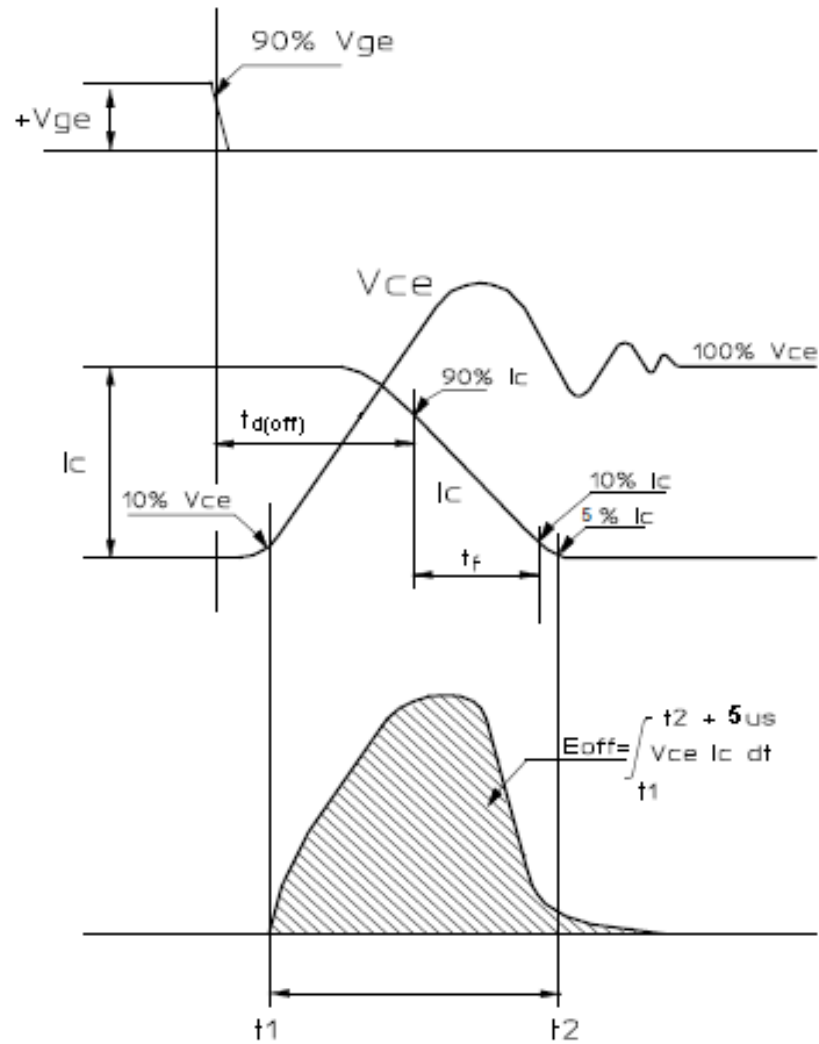


Figure 28. Definition of Turn Off Waveform


NGTB40N120FL2WG

REVISION HISTORY





Revision	Description of Changes	Date
9	Update the data sheet to move value from Max to Typ under ICES symbol.	3/23/2026
10	Revision to to correct the VF Max from 2.0 V to 2.6 V.	6/2/2026

This document has undergone updates prior to the inclusion of this revision history table. The changes tracked here only reflect updates made on the noted approval dates.




TO-247
CASE 340AM
ISSUE C

DATE 07 SEP 2021

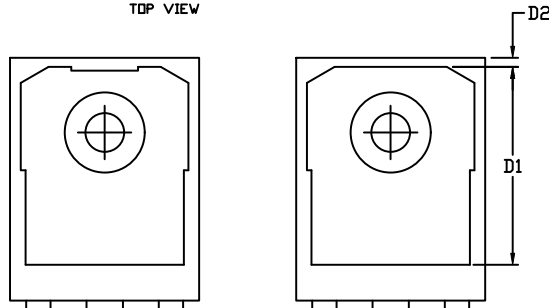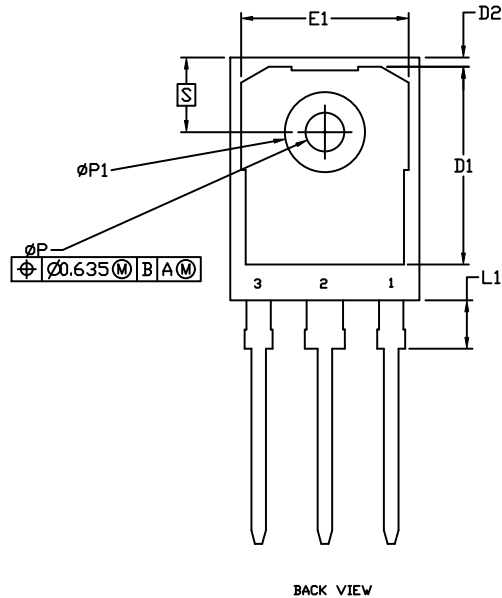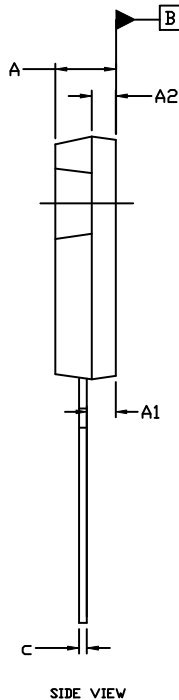
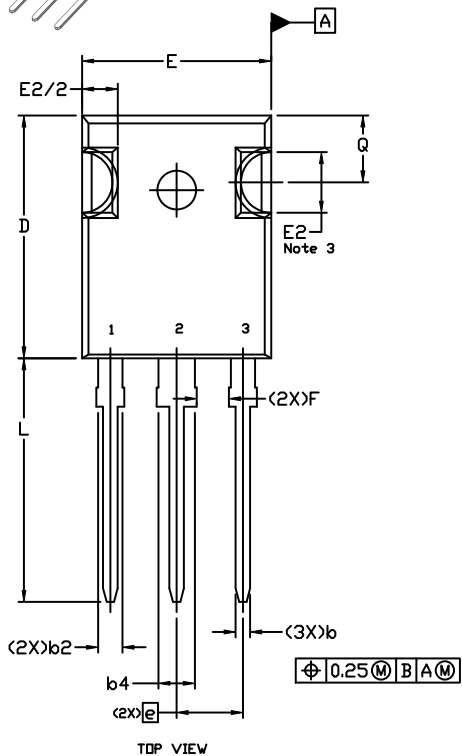


NOTE 4 HEATSINK SHAPES

NOTES:

1. DIMENSIONING AND TOLERANCE AS PER ASME Y14.5M, 2009.
2. ALL DIMENSION ARE IN MILLIMETERS.
3. SLOT REQUIRED, NOTCH MAY BE ROUNDED.
4. OPTIONAL BACK SIDE HEATSINK SHAPE.
5. DIMENSIONS ARE EXCLUSIVE OF BURRS AND MOLD FLASH. DIMENSIONS D AND E ARE MEASURED AT THE OUTERMOST EXTREME OF THE PLASTIC BODY.
6. DIMENSIONS A1 TO BE MEASURED IN THE REGION DEFINED BY L1.
7. LEAD FINISH IS UNCONTROLLED IN THE REGION DEFINED BY L1.

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	4.70	5.00	5.30
A1	2.20	2.40	2.60
A2	1.80	2.00	2.20
b	1.07	1.20	1.33
b2	1.65	2.12	2.35
b4	2.60	3.12	3.40
c	0.45	0.60	0.75
D	20.80	21.00	21.34
D1	16.30	---	---
D2	0.75	---	---
E	15.50	16.00	16.25
E1	13.80	---	---
E2	4.32	4.90	5.49
e	5.45 BSC		
F	2.655	---	---
L	19.80	20.00	20.80
L1	3.81	4.20	4.35
P	3.55	3.60	3.65
P1	6.60	---	---
Q	5.40	6.00	6.20
S	6.15 BSC		

GENERIC
MARKING DIAGRAMS*


XXXX = Specific Device Code
A = Assembly Location
Y = Year
WW = Work Week
G = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON77284F	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	TO-247	PAGE 1 OF 1

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales

