

1 MHz Flow Meter Transducer



Model: MPYA

P/N: H2KMPYA1000600



Unictron's transducer is applied for 1MHz ultrasonic liquid flow meter. The housing of transducer can provide excellent resistance to solvent as well as in the acid/base environment. The transducer features a high sensitivity and longer life time of operation with low temperature drift.

Features

High sensitivity

Low temperature drift


Excellent resistance to solvent and acid or base environment

Specifications

Operation Frequency	1	MHz
Capacitance (@ 1 kHz)	$1.2 \pm 20\%$	nF
Sensitivity dB	[*] -28 min	dB
Beam angle(-3dB full angle)	5	Degree
Operation voltage	50 max	Vpp
Operation temperature	+4 ~ +80	°C
Storage temperature	-10 ~ +80	°C

* Applied voltage Vpp=3.3V,sine wave, 20 cycles burst, Water level 10cm, Water temperature 25°C

Sensitivity measurement diagram

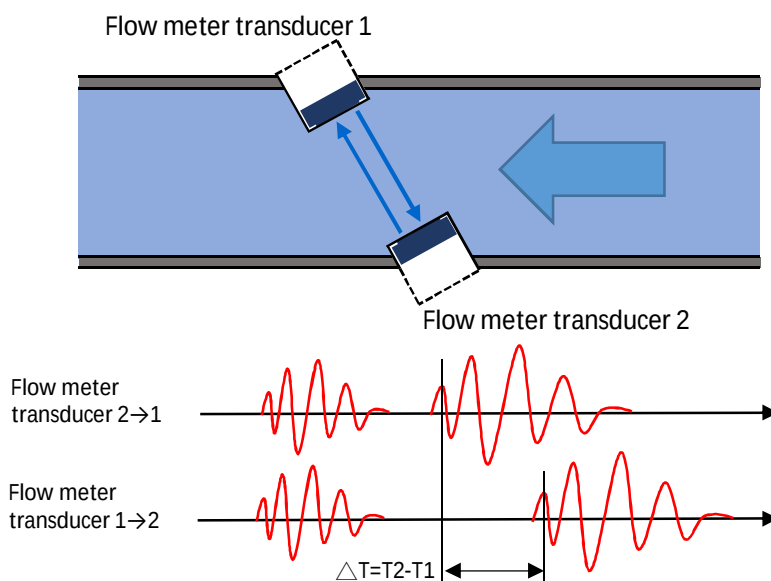


Dimensions

Housing material: PPS

Wire: AWM 2547 80C 300V VW-1 28AWG

Sealing Glue: PU

Unit: mm

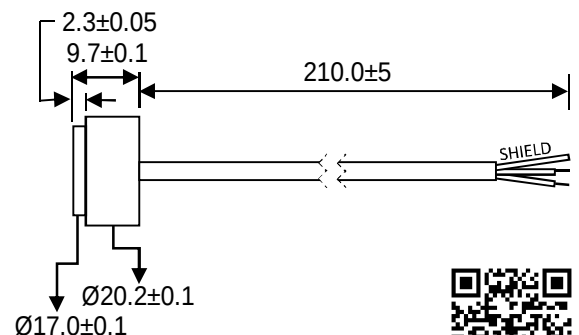

www.unictron.com