

150mA, 100V High Speed Switching Diode

FEATURES

- AEC-Q101 qualified
- Fast switching speed
- Ideal for automated placement
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free

APPLICATIONS

- High-speed switching
- General-purpose switching

MECHANICAL DATA

- Case: SOD-323
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: Indicated by cathode band
- Weight: 4.5mg (approximately)



PACKAGE: SOD-323	PIN CONFIGURATION	CIRCUIT DIAGRAM

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Power dissipation ⁽¹⁾	P_D	200	mW
Repetitive peak reverse voltage	V_{RRM}	100	V
Average rectified output current	I_O	150	mA
Forward continuous current	I_{FM}	300	mA
Non-repetitive peak forward surge current	$t = 1\text{s}$	1	A
	$t = 1\mu\text{s}$	2	A
Junction temperature	T_J	-55 to +150	°C
Storage temperature	T_{STG}	-55 to +150	°C

Note:

1. Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint

THERMAL PERFORMANCE

PARAMETER	SYMBOL	TYP	UNIT
Junction-to-ambient thermal resistance ⁽¹⁾	$R_{\Theta JA}$	625	°C/W

Thermal Performance Note:

1. Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ C$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNIT
Forward voltage ⁽¹⁾	$I_F = 1\text{mA}$	V_F	-	-	0.715	V
	$I_F = 10\text{mA}$		-	-	0.855	
	$I_F = 50\text{mA}$		-	-	1.000	
	$I_F = 150\text{mA}$		-	-	1.250	
Reverse breakdown voltage	$I_R = 100\mu\text{A}$	V_{BR}	100	-	-	V
Reverse current ⁽²⁾	$V_R = 75\text{V}$	I_R	-	-	0.5	μA
	$V_R = 75\text{V}, T_J = 150^\circ C$		-	-	50	μA
Junction capacitance	$f = 1\text{MHz}, V_R = 0\text{V}$	C_J	-	-	2	pF
Reverse recovery time	$I_F = I_R = 10\text{mA}, I_{RR} = 1\text{mA}, R_L = 100\Omega$	t_{rr}	-	-	4	ns

Notes:

1. Pulse test with PW=0.3 ms
2. Pulse test with PW=30 ms

ORDERING INFORMATION

ORDERING CODE	PACKAGE	PACKING
1N4148WSH RRG	SOD-323	3,000 / 7" Tape & Reel

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Power Dissipation Curve

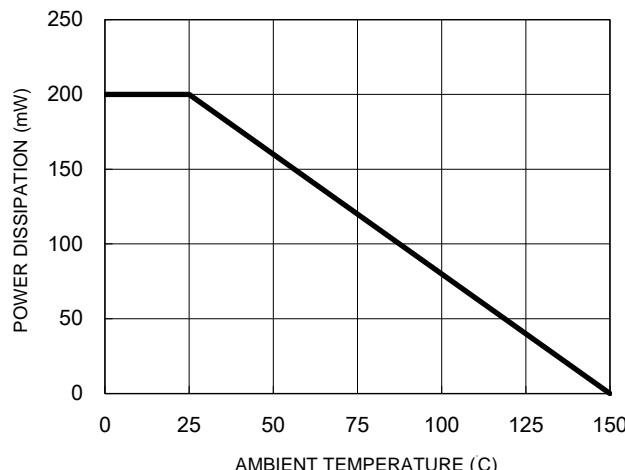


Fig.2 Typical Junction Capacitance

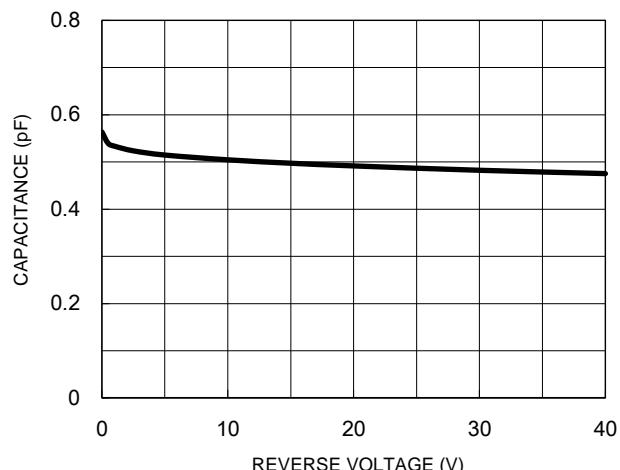


Fig.3 Typical Reverse Characteristics






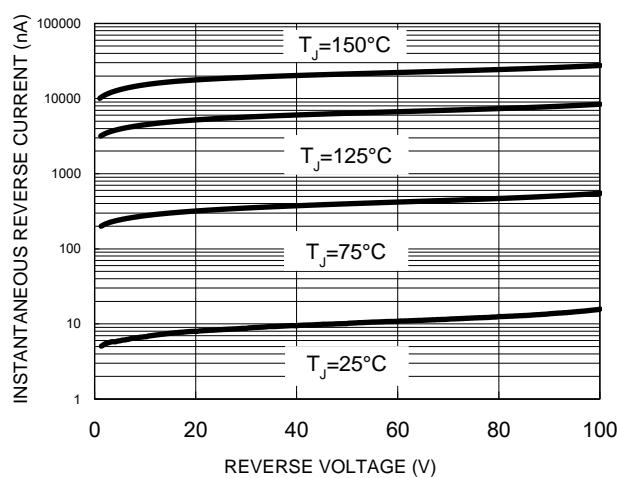


Fig.4 Typical Forward Characteristics

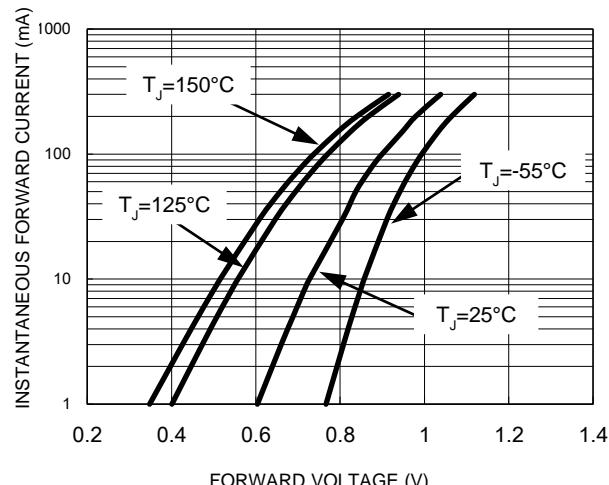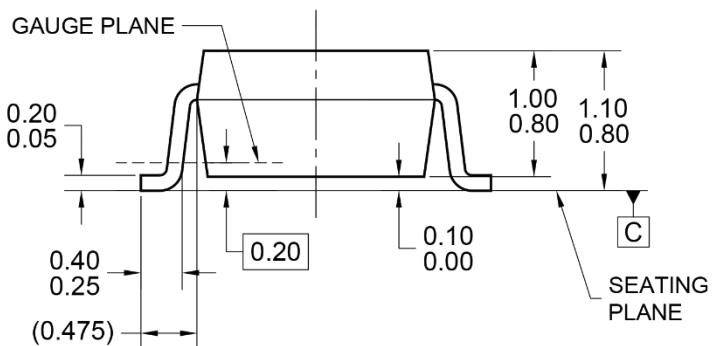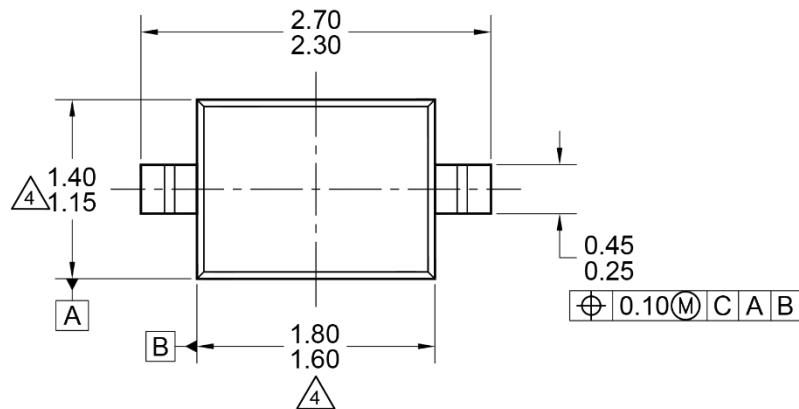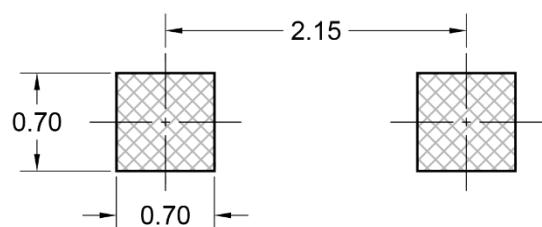

PACKAGE OUTLINE DIMENSION
SOD-323

MARKING DIAGRAM

T4 = Device marking
 F = Factory code


SUGGESTED PAD LAYOUT
NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. PACKAGE OUTLINE REFERENCE: EIAJ ED-7500A, SC-76A.
4. MOLDED PLASTIC BODY LATERAL DIMENSIONS DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
5. DWG NO. REF: HQ2SD07-SOD323-113 REV A.

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.