



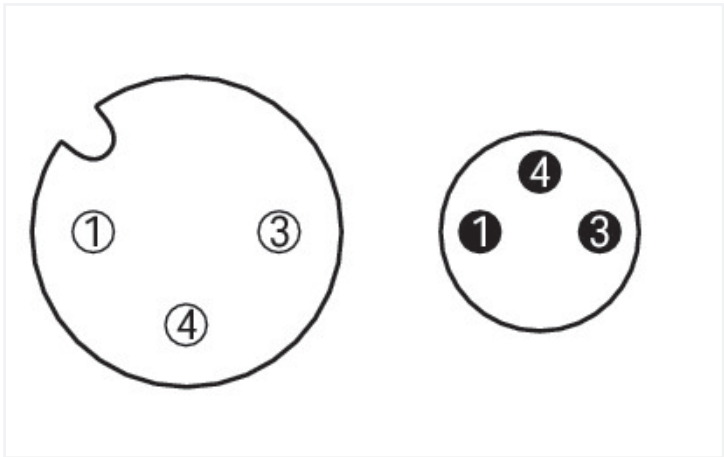

Similar to illustration

Pin 1 ... 4: 0.25 mm²

1	brown	1
3	blue	3
4	black	4

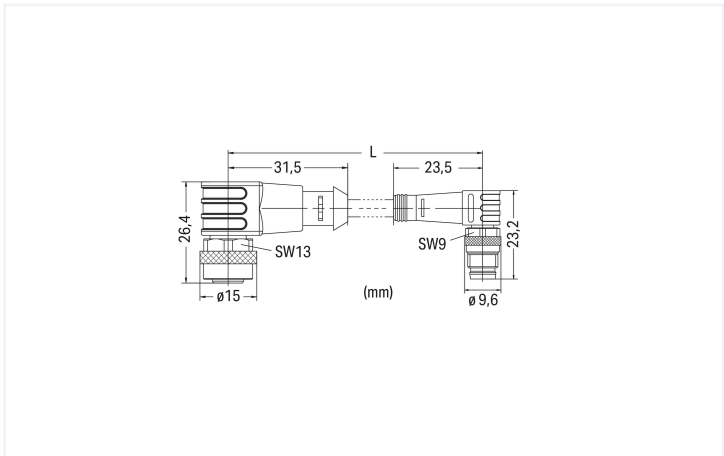

Dimensions in mm

- Short description:**
- PUR, halogen-free
 - Suitable for drag chains
 - Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
 - Good chemical resistance.
 - Cable used: UL listed

Technical data			
General information		General information	
Operating voltage	AC/DC 60 V	Ambient (operating) temperature (dynamic)	-25 ... +90 °C
Operating current	4 A		
Rated impulse withstand voltage	1.5 kV		
Insulation resistance	>10 ⁹ Ω		
Contact resistance	10 mΩ		
Conductor resistance	≤ 60 Ω/km		
Pollution degree	3 per VDE 0110		
Protection type	IP67		
Ambient (operating) temperature (static)	-50 ... +90 °C		



Drag chain compatible	
Bending radius	10 x cable diameter (min.)
Bending cycles	2 million
Acceleration (min.)	5 m/s²
Travel speed (max.)	3.33 m/s
Travel path (horizontal) max.	5 m
Travel path (vertical) max.	2 m
Torsional capacity	180 °/m

Connector	
Connection type	M12 Socket - M8 plug
Pole number	3
Cable connection direction to mating direction	90 °
Cable connection direction to mating direction (2)	90 °
Connector interface coding (cable/adaptor) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 ... 1 Nm

Commercial data	
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918974844
Customs tariff number	85444290900

Product Classification	
UNSPSC	26121604
eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 9.0	EC001855
ETIM 10.0	EC001855
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	476103e7-251b-49c1-bb45-e5c051eb6105
SCIP notification number (Belgium)	434aa30e-afc3-493e-ac07-b903e70bec5d
SCIP notification number (Bulgaria)	11e020ba-6f3e-43c1-a87a-fda9324ab8c8
SCIP notification number (Czech Republic)	96178905-00b9-42e0-bef0-f2f88e1b9ba8
SCIP notification number (Denmark)	f60312fd-61fa-465d-810e-cc026ca352cb
SCIP notification number (Finland)	dd25563c-1680-4b6f-a13c-9cdb41bc7f90
SCIP notification number (France)	c547ae65-7b12-4124-99ea-9ceedcc00fff
SCIP notification number (Germany)	cca9a524-a475-460e-be11-cc304185cf85
SCIP notification number (Hungary)	52138419-fead-4fab-a863-8f51e8384660
SCIP notification number (Italy)	e1a0a190-a02a-4af7-9f42-7c8432634257
SCIP notification number (Netherlands)	2ab136e8-3146-49a0-a308-bb2f1568517f
SCIP notification number (Poland)	96399986-a646-48c5-9ceb-c8a4268bf9d4
SCIP notification number (Romania)	9bfeede5-ad41-4e16-8179-4d8471e80c68

Cable	
Cable length	1 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black

0216b120-47f9-48cf-a204-f01a228a2f60

Environmental Product Compliance

Environmental Product
Compliance
756-5504/030-010



System Description

IP67 Cables and Plug- gable Connectors

pdf
157.80 KB



756-5504/030-010

19.02.2019

xml
3.21 KB



756-5504/030-010

20.09.2017

doc
26.00 KB



CAE data

WSCAD Universe
756-5504/030-010



Current addresses can be found at: www.wago.com